

BLAST CHILLER / FREEZER COLD ROOM 40 GN2/1 (CHILLING CAPACITY +90°/+3°C KG 420 - FREEZING CAPACITY +90°/-18°C KG 270) - WITHOU

Model: PBF402ASP_1P



General characteristics

THE TOP CONTROLLER TARGETS, ABOVE ALL, THE MEDIUM- AND LARGE-SCALE CATERING INDUSTRY and is particularly suited to the application of the Cook&Chill concept, with chillers designed to be compatible with ovens using trolley units. Depending on the production capacity demanded by the catering service, the blast chilling stage is managed autonomously by the software built into the actual controller. The resulting cycles can be stored and called back up when needed.


Technical/functional Characteristics

- Blast chillers/freezers R-Series cold rooms with electronic control, forced-air, entirely made of in AISI 304 18/10 both internally and externally and are suitable for the corresponding OLIS ovens.
- Control board with DISPLAY and advanced functions. It is possible to memorize till 100 programmes.
- Heated Multipoint probe, as standard equipment.
- Paneled-up construction.
- Capacity GN 1/1 and GN 2/1.
- Core-probe at Multipoint to measure the blast-chilling and freezing temperature, (heated for all freezing models).
- External satined finishing type SCOTCH-BRITE.
- 80 mm insulation with CFC and HCFC-free polyurethane with density 42 kg/m3.
- Ecological refrigerant R404A.
- High store capacity compartment, with rounded edges to make cleaning easy.
- Ergonomic handles.
- Cold room suited for the introduction of trolley GN1/1 - GN2/1.
- Drainhole.
- Climatical class "T" (Ambient temperature: +43°C).
- Power supply 230V /1Ph / 50Hz for cold room GN1/1 - 400V / 3Ph / 50Hz for cold room GN2/1 and cooled unit.
- Full CE compliance.
- Built to comply with HACCP regulations.

TECHNICAL DATA

DIMENSIONS	
WIDTH (MM)	1500
DEPTH (MM)	2200
HEIGHT (MM)	2130
CAPACITY	-
DIMENSIONE CELLA (MM)	-
TEMPERATURA DI LAVORO	-

ELECTRIC CONNECTION (V~/HZ)	220
COLD WATER CONNECTION (Ø)	-
DRAIN (Ø)	40 mm
POTENZA FRIGORIFERO	-
ELECTRIC POWER (KW)	550
CAPACITA' ABBATTIMENTO +90/+3 °C (KG)	-
CAPACITA' CONGELAMENTO +90/-18 °C (KG)	-

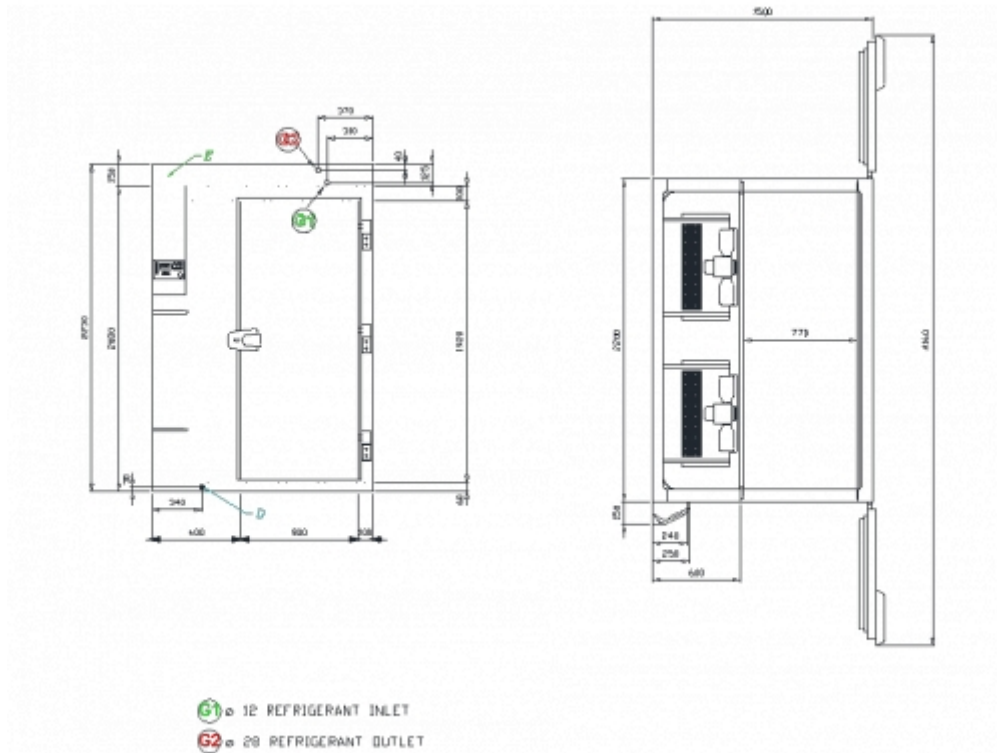

ACCESSORIES

KIT OF GERMICIDAL LAMP FOR BLAST CHILLER COLD ROOMS

KIT 4 PROBES

KIT OF PRINTER FOR BLAST CHILLER COLD ROOMS

COVER FOR CONDENSER UNIT IN STAINLESS STEEL

KIT 2 PROBES

AIR REMOTE REFRIGERATION UNIT

KIT 3 PROBES