

POWERED ELECTRIC RANGE WITH CERAMIC GLASS M80 - TOP

CODICE
CR1354099MODELLO
78EGTPT

GENERAL FEATURES

Standard top and freestanding modules available 40 cm - 60 cm - 80 cm - 120 cm.

Complete and totally configurable range. The top modules can be positioned freely on the bases to create the composition that is most suitable for every need.

The GN1/1 gas and electric oven bases complete the options that Proxe makes available to chefs.

Quick and rapid side-by-side installation of the equipment, with the possibility of positioning a covering over the joints.

Tops, shelves and control panels in AISI304 stainless steel.

Moulded surfaces guarantee robustness, reliability and hygiene.

Machines for flat-top installation supplied as standard with h8 cm feet, in compliance with regulations.

Installation on a suitable compartment with rear technical compartment, for the passage of the gas/electrical/water connections.



TECHNICAL DETAILS

Moulded top in AISI304 stainless steel with Scotch Brite finish moulded in a single piece and plates hermetically sealed guarantee easy cleaning and prevent infiltrations of grime and water.

Front control panel made of AISI304 stainless steel with Scotch Brite finish and profile designed for easy cleaning.

External panelling in stainless steel with Scotch Brite finish.

Top versions with construction designed for installation on open neutral bases or bases with doors, on refrigerated bases and on top surfaces. Standard h80 mm feet for flat-top installations to facilitate installation, connection and safe maintenance of the equipment in compliance with regulations.

Connection of the modules by means of a dedicated element (JC joint cover accessory) to prevent infiltration of liquid and grime between the elements.

High efficiency cooking plates, 2.6 kW each.

All the plates measure Ø 26 cm with cast iron construction for optimal heat distribution for cooking with pots.

Power adjustment on six levels, with safety thermostat and indicator light for work control.

IPX4 water-protection rating.

POWERED ELECTRIC RANGE WITH CERAMIC GLASS M80 - TOP

CODICE
CR1354099

MODELLO
78EGTPT

TECHNICAL DATA

Materiale	CR1354099
Definizione	78EGTPT VETROCERAMICA 4 ZONE POTENZ. TOP
CODICE COMMERCIALE	78EGTPT
LINEA COMMERCIALE	PROXE70
ALIMENTAZIONE	ELETTRICA
DIM. LARGHEZZA MACCHINA	800 MM
DIM. PROFONDITA' MACCHINA	700 MM
DIM. ALTEZZA MACCHINA	295 MM
PESO NETTO	32,5 KG
Profondità Imballo	440 MM
Larghezza Imballo	980 MM
Altezza Imballo	540 MM
Volume Imballo (m³)	0.25
Peso lordo (kg)	35
ALIMENTAZIONE ELETTRICA 1	380-415V 3N
ALIMENTAZIONE ELETTRICA 2	220-240V 3
FREQUENZA	50/60 Hz
POTENZA ELETTRICA	10 KW
GRADO IP	IPX4
MODELLO CERTIFICATO	78EGT
GRADO IP / POT LAMP1	IPX4
TIPOLOGIA	TOP
VARIANTI PRODOTTO	VETROCERAMICA
NUMERO MODULI	1/1 MODULO

POWERED ELECTRIC RANGE WITH CERAMIC GLASS M80 - TOP

CODICE

CR1354099

MODELLO

78EGTPT


PROXE70

PROFESSIONAL LINE FOR EVERYONE


PRODUCT'S PLUS



Connection of the modules by means of a dedicated element (JC joint cover accessory) to prevent infiltration of liquid and grime between the elements.



Top versions with construction designed for installation on open neutral bases or bases with doors, on refrigerated bases and on top surfaces. Standard h80 mm feet for flat-top installations to facilitate installation, connection and safe maintenance of the equipment in compliance with regulations.



Zone cottura identificate da serigrafia sul piano vetroceramico, ciascuna con potenza erogata di 2,5kW.




IPX4 water-protection rating.

POWERED ELECTRIC RANGE WITH CERAMIC GLASS M80 - TOP

CODICE
CR1354099

MODELLO
78EGTPT

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

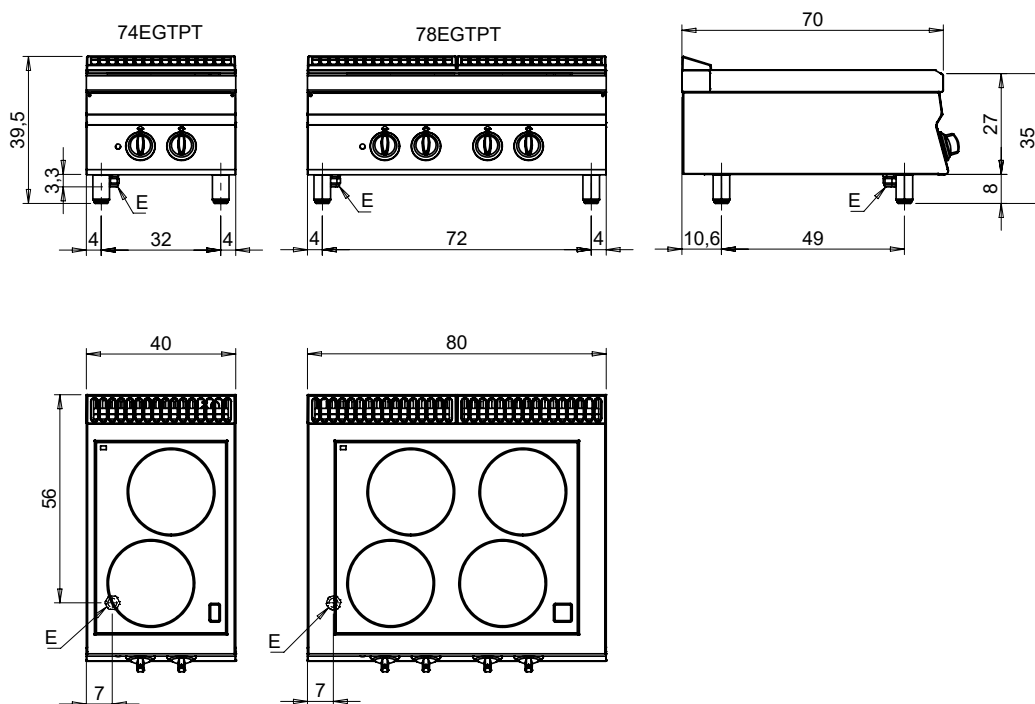

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda

E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukkelep - Válvula de depressão	
S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	
S4 Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno	L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível