



272 Kg/24h

Fabbricatori di ghiaccio granulare / Flakers Ice Makers:

B95C - B130C - B160C - B200C - B125 - B205 - B305 - B505 - B1005

B95C F - B130C F - B160C F - B200C F - B125 F - B205 F - B305 F - B505 F - B1005 F

B305 s

230V/1N/50Hz

Modular - Flaker System



USB



BLUETOOTH



WI-FI



TOUCH CONTROL



RAINBOW TECHNOLOGY



SAFE ICE



PROGRAMMED OZONE CYCLE



SCHEDULED PRODUCTION

CARATTERISTICHE

- Scocca in acciaio
- Condensazione ad aria o acqua
- Tasto comandi capacitivo
- Segnalazione acustica e luminosa allarmi
- Report allarmi HACCP
- Regolazione umidità ghiaccio
- Regolazione livello ghiaccio deposito
- Collegamento USB per aggiornamento sw e scarico dati HACCP
- Ventilatore condensatore controllato alle basse temperature ambiente
- Analisi predittiva malfunzionamenti
- Report prestazioni apparecchiatura
- Connessione cloud IOT
- Produzione ghiaccio programmabile
- Filtro aria estraibile e lavabile

OPZIONALE

- Ciclo sanificazione programmabile con Ozono

FEATURES

- Stainless steel construction
- Air or water condensation
- Touch control
- Acoustic and luminous alarms
- Report HACCP alarms
- Ice humidity adjustment
- Storage bin ice level adjustment
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive analysis of malfunctions
- Machine performance report
- Feet 100 mm kit
- IOT cloud connection
- Programmable ice production
- Removable and washable air filter

OPTIONAL

- Ozone sanitization cycle programmable

DATI TECNICI - SPECIFICATIONS



DEPOSITO / SLOPE BINS

MG205 - MG255

(KB205-255)

MG305 (KB305)

MG405 (KBM405)

MG505 (KBM505)

DIMENSIONI / DIMENSIONS

L x P x H (mm)



570 x 545 x 535



650 x 600 x 690

VOLTAGE



220-240/50/1

GAS




R290

GWP=3

Ton CO2 equiv. Air = 0.0

Ton CO2 equiv. Water = 0.0

TIPO GHIACCIO / ICE TYPE



PERCENTUALE ACQUA RESIDUA

25 %

ICE CONTAINS RESIDUAL WATER

PRODUZIONE GHIACCIO / ICE PRODUCTION

kg/24h
lbs/24h

Raffreddamento ad Aria
Air Cooled Unit



Temp. Aria Air Temp.	Temp. Acqua / Water Temp.			
°C °F	32° 90°	21° 70°	15° 60°	10° 50°
10°	221	247	259	272
50°	487	543	572	600
21°	217	242	255	268
70°	478	534	562	590
32°	174	199	212	224
90°	384	439	467	494
38°	162	187	200	213
100°	356	412	440	468

Raffreddamento ad Acqua
Water Cooled Unit



Temp. Aria Air Temp.	Temp. Acqua / Water Temp.			
°C °F	32° 90°	21° 70°	15° 60°	10° 50°
10°	200	221	228	240
50°	440	487	503	529
21°	197	216	224	235
70°	434	477	493	517
32°	190	207	218	232
90°	418	456	481	511
38°	182	199	208	220
100°	401	439	459	485

cond	comp. W	ABS. W	Fuse	Kwh/100Kg	I / h	kg	kg

B305 SA AG	220-240/50/1		1388	950	10	10.9	8.4	57	64
B305 SW AG	220-240/50/1		1388	880	10	10,1	63,7	57	64

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel.
+39 0423.738452 Fax +39 0423.722811
email: info@castelmatic.it
www.castelmatic.eu - www.icematic.eu



272 Kg/24h

Fabbricatori di ghiaccio granulare / Flakers Ice Makers:

B95C - B130C - B160C - B200C - B125 - B205 - B305 - B505 - B1005


B95C F - B130C F - B160C F - B200C F - B125 F - B205 F - B305 F - B505 F - B1005 F

B305 s

230V/1N/50Hz

Modular - Flaker System




DIMENSIONI - DIMENSIONS

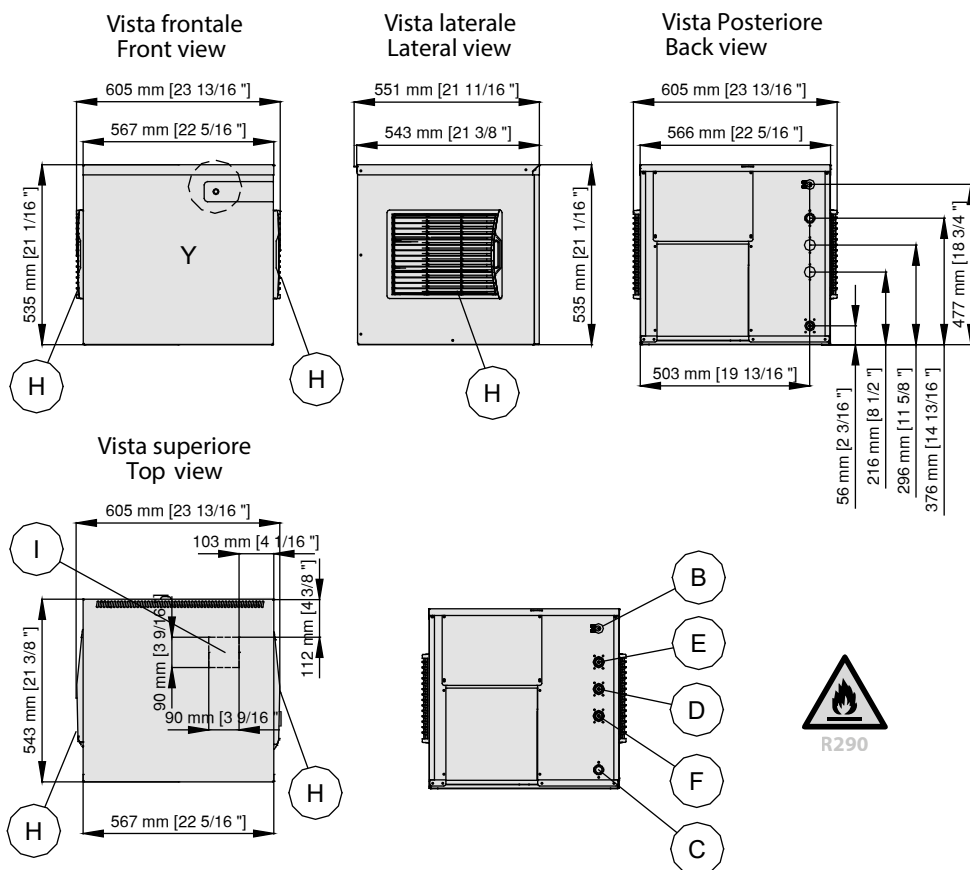

TOUCH CONTROL

APP MyICE

Permette il comando e il monitoraggio dei produttori di ghiaccio direttamente da smartphone / It allows the control and monitoring of the ice machines directly from a smartphone

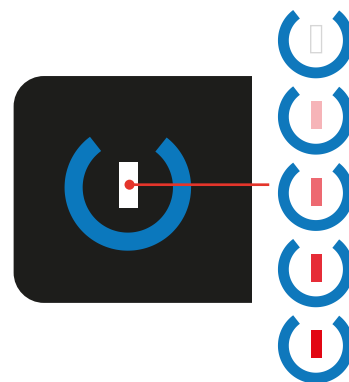

Capacitive Stand-by Reset control (led with continuous colors variation from white to red)

Pulsante Capacitivo di ripristino dello stand-by (led a variazione continua di colori dal bianco al rosso)

Condizioni operative - Operating requirements

	Min.	Max
Temp. Ambiente / Air Temperature	10°C	40°C
Temp. Acqua / Water Temperature	5°C	35°C
Press. Acqua / Water Pressure	1 Bar (14psi)	5 Bar (70psi)
Conducibilità acqua / Water conductivity	>10 µS	
Alimentazione / Electrical supply	-10%	+10%

Calore espulso / Rejected Heat	2594 W
Volume Aria / Air Volume	300 m³/h

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel. +39 0423.738452 Fax +39 0423.722811 email: info@castelmatic.it www.castelmatic.eu - www.icematic.eu