

### C81MP

C81MP CONFECTIONERY CABINET EN2 1D -30/+18

plug-in REFRIGERATED CABINET





#### **FUNCTIONS**

Temperature range	-30/-12
Relative humidity (UR%)	40 - 90
Energy label	D
Climatic class	5
Hot gas	

#### **BASIC TECHNICAL DATA**

Net width (mm)	790
Net depth (mm)	915
Net height (mm)	2110
Net weight (Kg)	171
Capacity (It)	607
N° teglie 600x800	22
Electrical power	230/1/50
Elec. Power** (W)	1634
Max absorbed current (A)**	7,89
Cooling power (W)	594
Consumption (kWh/Kg) ISO16825 (W24h)	6,96
Freon (Gas)	R290
Freon quantity (g)	150
External width (mm)	845
Packing depth (mm)	980
External height (mm)	2200
Gross weight (Kg)	206

#### **MAIN FEATURES**

monocoque construction,

PU, CFC and HCFC free insulation, thickness 85 mm,

density 42 kg/m3

Ergonomic full height handles and magnetic seals on 4 sides

Standard lock and key

Feet ( $\emptyset$  2") with adjustable height in AISI 304 18/10 steel

Self-closing doors with 100° opening lock and reversibility with accessory kit

Stainless steel rack supports and uprights

Full-Touch 5-inch Display

Umidity probe

Connectivity 4.0

Use of low consumption electronic fans with modulated speed

Foamed motor compartment sides for improved sturdiness

Optimized energy consumption for annual savings of up to 3200 kWh (BT version)

Forced and ducted ventilation that does not directly hit the product

Internal set-up: 24 "L" sets of slides


#### **SET UP**

24 "L" Couple of slides for grids	
Compartments number	1
Door number	1



## C81MP


C81MP

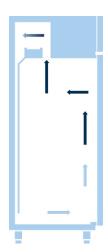




C81MP

# EN2 CABINET SELF CONTAINED

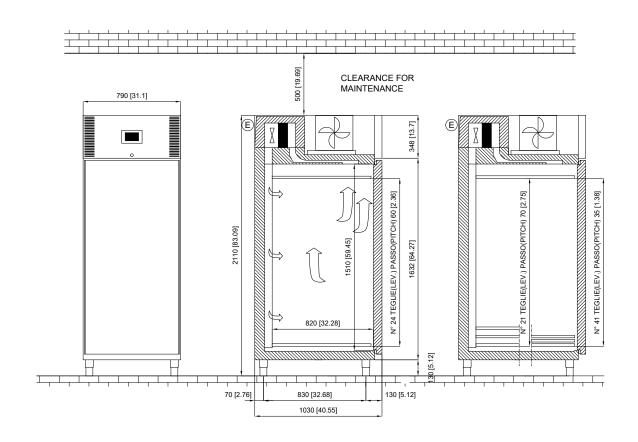



| 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 | 1030 |



600 [23.62] 600 [23.62] 400 [15.75]

- G1) INGRESSO REFRIGERANTE Ø 6 REFRIGERANT INLET Ø 6
- ©2 USCITA REFRIGERANTE Ø 10 FERIGERANT OUTLET Ø 10
- © CONNESSIONE ELETTRICA ELECTRICAL CONNECTION
- W CONNESSIONE SCARICO DRAIN CONNECTION
- (H1) CONNESSIONE INGRESSO H2O 1/2" INLET WATER CONNECTION 1/2"
- CONNESSIONE USCITA H2O 1/2" EXHAUST WATER CONNECTION 1/2" DIMENSIONI mm

DIMENSIONI mm
DIMENSIONS [in]