



Cucimax | Tilting Braising Pans

It's an indispensable piece of equipment for the food industry and for the most advanced centralised kitchens: the high versatility of its use allows one to optimize the production processes and human resources, reducing consumption and saving money. With the innovative CUCIMAX bratt pan with mixer you can now cook under pressure and mix at the same time.

The best in tilting braising pans

This multifunctional cooker is complete, innovative and sturdy, ideal for countless applications. Among the equipment for professional kitchens, Cucimax is really one of the most versatile and evolved, since it allows different types of preset cooking: steaming, boiling, pressure cooking, braising and browning.

DIRECT GAS HEATING NON PRESSURISED

MODEL	CAPACITY lt	POWER kW	DIMENSIONS mm	NOTES
CBTG 090 V1	90	22	1445 x 1290 x 1030H	0.6 kW - 1N + PE AC 230V 50 Hz
CBTG 130 V1	130	22	1455 x 1290 x 1030H	
CBTG 180 V1	180	33	1665 x 1505 x 1030H	
CBTG 310 V1	310	49	1755 x 1560 x 1030H	




Cucimax can be used for

- Bolognese sauce/pasta sauces
- Stew
- Mirepoix
- Risottos
- Polenta
- Caramel
- Jams and marmalades
- Vegetable stew
- Sautéed vegetables


boiling | **braising** | pasteurising | **tilting** | **mixing** | cooling | frying | underpressure | vacuum cooking | cutting | washing | drying

TECHNICAL DRAWING MOD. CBTG 090 V1

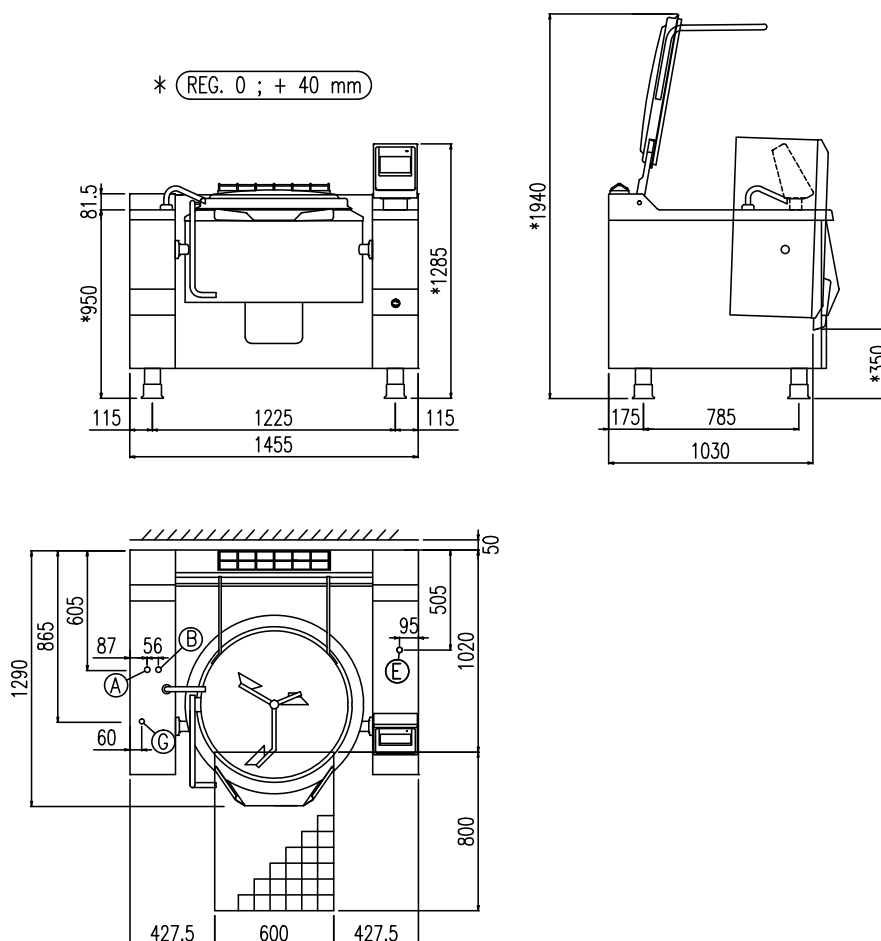


G	Attacco Gas (secondo ISO 7-1) Gas Connection (ISO 7-1)	Gasanschluss (ISO 7-1) Raccordement Gaz (ISO 7-1)	3/4"
E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	.60 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	220-240V 1N ~ 50Hz
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	3/4"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	3/4"

TECHNICAL DRAWING MOD. CBTG 130 V1

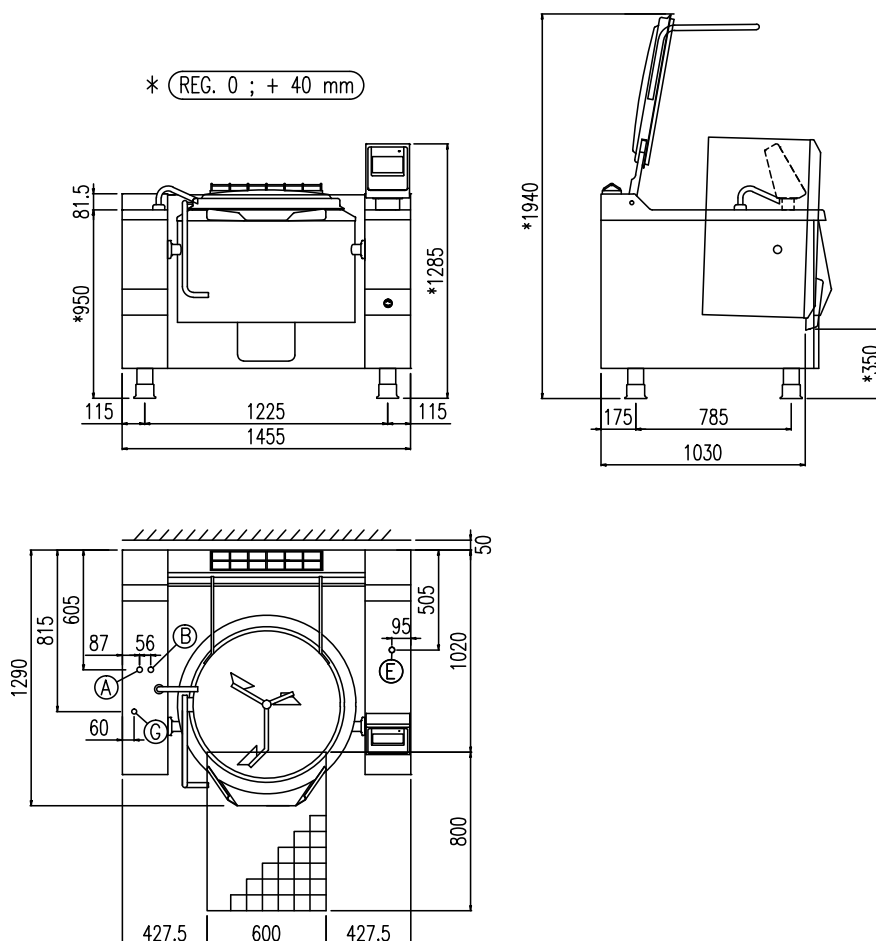


G	Attacco Gas (secondo ISO 7-1) Gas Connection (ISO 7-1)	Gasanschluss (ISO 7-1) Raccordement Gaz (ISO 7-1)	3/4"
E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	.60 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	220-240V 1N ~ 50Hz
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	3/4"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	3/4"

TECHNICAL DRAWING MOD. CBTG 180 V1

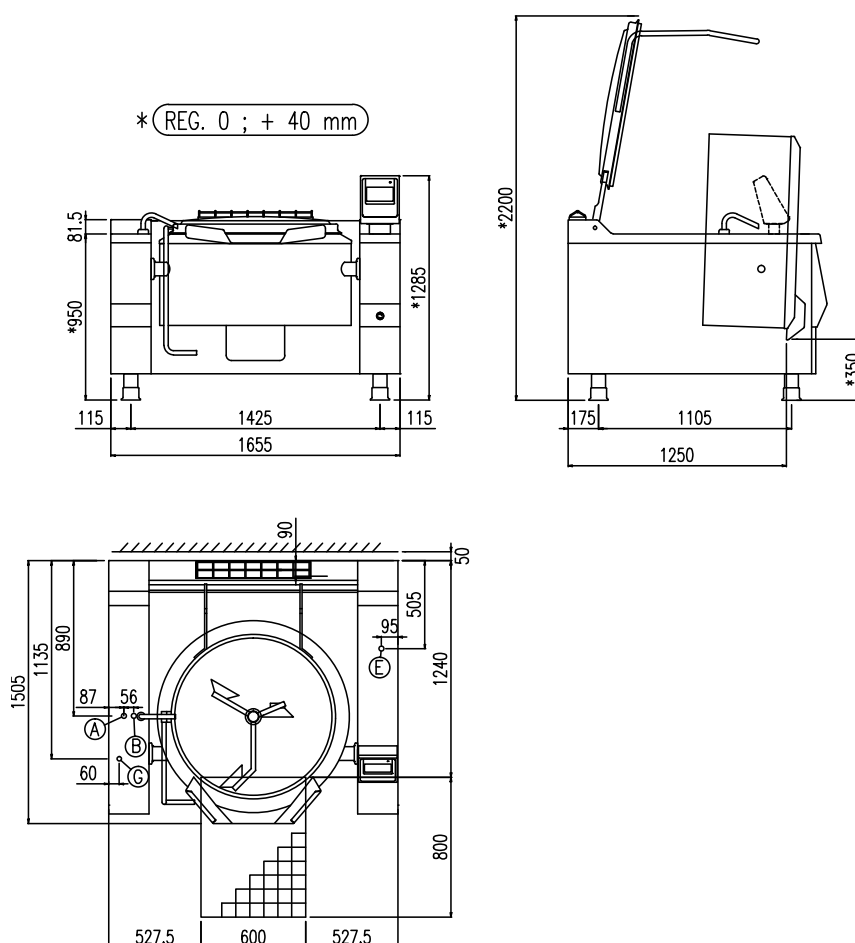

G	Attacco Gas (secondo ISO 7-1) Gas Connection (ISO 7-1)	Gasanschluss (ISO 7-1) Raccordement Gaz (ISO 7-1)	3/4"
E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	.60 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	220-240V 1N ~ 50Hz
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	3/4"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	3/4"

TECHNICAL DRAWING MOD. CBTG 310 V1

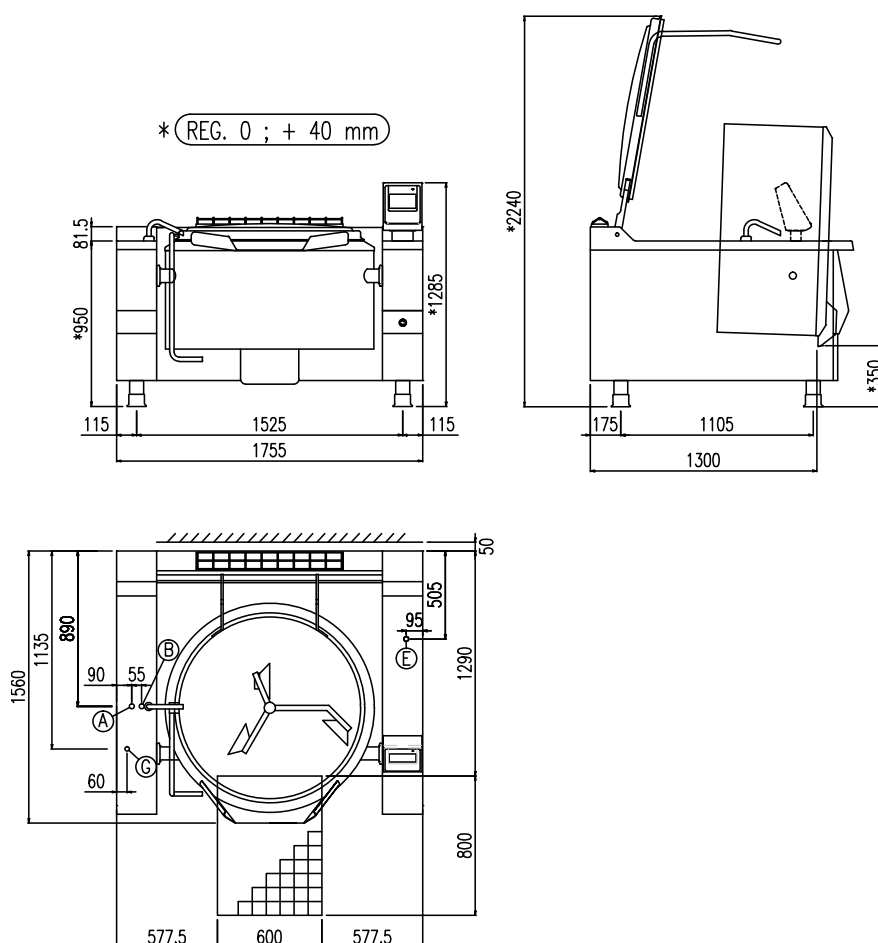

G	Attacco Gas (secondo ISO 7-1) Gas Connection (ISO 7-1)	Gasanschluss (ISO 7-1) Raccordement Gaz (ISO 7-1)	3/4"
E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	.60 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	220-240V 1N ~ 50Hz
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	3/4"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	3/4"