



Cucimax | Tilting Braising Pans

It's an indispensable piece of equipment for the food industry and for the most advanced centralised kitchens: the high versatility of its use allows one to optimize the production processes and human resources, reducing consumption and saving money. With the innovative CUCIMAX bratt pan with mixer you can now cook under pressure and mix at the same time.

The best in tilting braising pans

This multifunctional cooker is complete, innovative and sturdy, ideal for countless applications. Among the equipment for professional kitchens, Cucimax is really one of the most versatile and evolved, since it allows different types of preset cooking: steaming, boiling, pressure cooking, braising and browning.

DIRECT GAS HEATING PRESSURISED

MODEL	CAPACITY lt	POWER kW	DIMENSIONS mm	NOTES
CBTG 130A V1	135	22	1455 x 1290 x 1030H	0.6 kW - 1N + PE AC 230V 50 Hz
CBTG 180A V1	190	33	1655 x 1505 x 1030H	
CBTG 310A V1	320	49	1755 x 1560 x 1030H	




Cucimax can be used for

- Bolognese sauce/pasta sauces
- Stew
- Mirepoix
- Risottos
- Polenta
- Caramel
- Jams and marmalades
- Vegetable stew
- Sautéed vegetables


boiling | **braising** | pasteurising | **tilting** | **mixing** | cooling | frying | underpressure | vacuum cooking | cutting | washing | drying

TECHNICAL DRAWING MOD. CBTG 130A V1

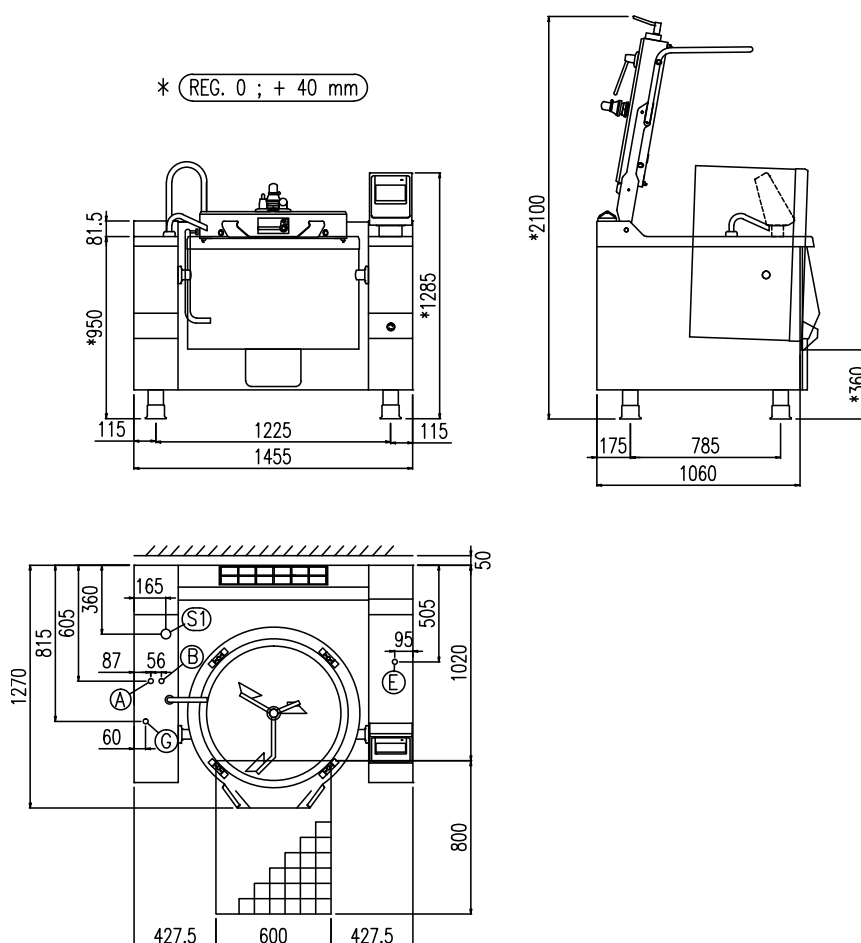


G	Attacco Gas (secondo ISO 7-1) Gas Connection (ISO 7-1)	Gasanschluss (ISO 7-1) Raccordement Gaz (ISO 7-1)	3/4"
E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	.60 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	220-240V 1N ~ 50Hz
S1	Scarico Condensa autocl. Condensate drain press.	Kondenswasserablauf Druk. Sortie du condenseur press.	1"
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	3/4"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	3/4"

TECHNICAL DRAWING MOD. CBTG 180A V1

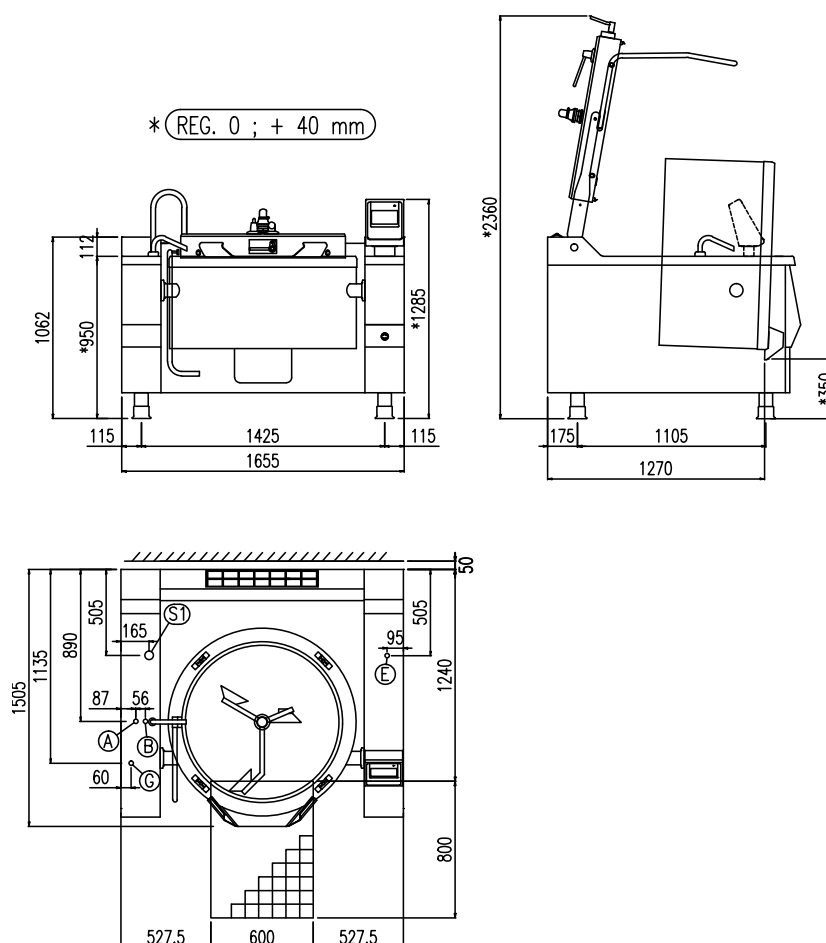

G	Attacco Gas (secondo ISO 7-1) Gas Connection (ISO 7-1)	Gasanschluss (ISO 7-1) Raccordement Gaz (ISO 7-1)	3/4"
E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	.60 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	220-240V 1N ~ 50Hz
S1	Scarico Condensa autocl. Condensate drain press.	Kondenswasserablauf Druk. Sortie du condenseur press.	1"
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	3/4"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	3/4"

TECHNICAL DRAWING MOD. CBTG 310A V1

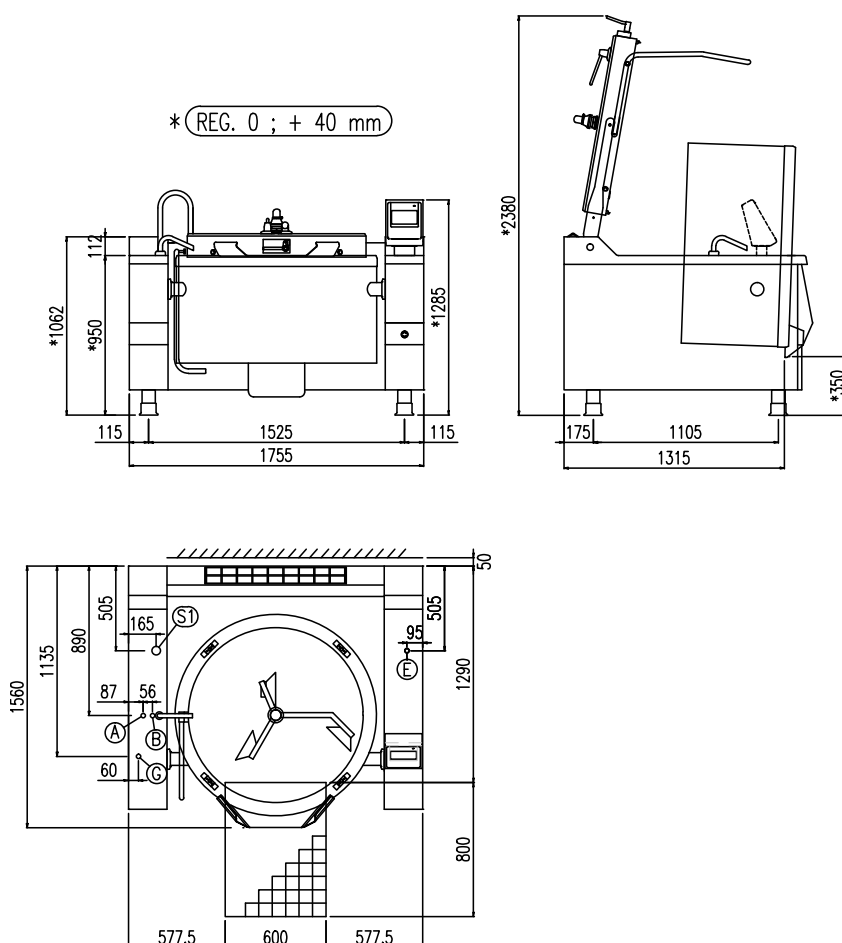

G	Attacco Gas (secondo ISO 7-1) Gas Connection (ISO 7-1)	Gasanschluss (ISO 7-1) Raccordement Gaz (ISO 7-1)	3/4"
E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	.60 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	220-240V 1N ~ 50Hz
S1	Scarico Condensa autocl. Condensate drain press.	Kondenswasserablauf Druk. Sortie du condenseur press.	1"
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	3/4"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	3/4"