



Icematic introduces a new range of full cube ice machines, with fully electronic functions, that respects the most stringent **anti-pollution parameters** by using **Propane natural gas (R290)**.

Self contained ice maker.

Up to 28kg production per 24/hr of medium ice cube.
6.5kg storage bin.

Complete with legs, water & drain hoses + 1 ice scoop.
10 AMP power supply.

215 mm drain height including legs to finished floor.



ICE PRODUCTION



Air Cooled Unit

Air Temp.	Water Temperature			
	32°	21°	15°	10°
°C	90°	70°	60°	50°
10°	20	24	26	28
50°	44	53	57	62
21°	18	22	23	25
70°	40	49	51	55
32°	15	19	20	22
90°	33	42	44	49
38°	13	16	17	18
100°	29	35	37	40

Water Cooled Unit

Air Temp.	Water Temperature			
	32°	21°	15°	10°
°C	90°	70°	60°	50°
10°	20	23	25	27
50°	44	51	55	60
21°	19	22	24	26
70°	42	49	53	57
32°	18	21	23	25
90°	40	46	51	55
38°	16	18	20	21
100°	35	40	44	46


CUBE TYPE



20g weight
BRIGHT CUBE
32mm x 35mm x 37mm

The Bright Ice Cube, appreciated for its versatility, is perfect for use in ice buckets, whiskey on the rocks, cocktails and appetisers. The crystal clear appearance of the Bright Cube makes it essential when a high quality is required.

CONTROL PANEL



Start-standby Switch
Status Led

BIN CAPACITY

6.5 Kg - 14.3 lbs | 325 pcs

DIMENSIONS

W x D x H (mm)

340 x 480 x 600/720



400 x 530 x 760

OPERATING REQUIREMENTS

Rejected Heat 947 W

Air Volume 185 m³/h



220-240/50/1



R290 GWP = 3

MIN

10°C (50°F)



MAX
40°C (104°F)

5°C (41°F)



35°C (95°F)

- 10 %



+ 10 %

1 Bar (14 psi)




5 Bar (70 psi)



SPECIFICATIONS

	 cond	 comp. W	 ABS. W	 Fuse	 kWh/100kg	 L / hr	 kg	 lbs	 kg	 lbs	 Ton CO ₂ equiv.
CS28 ZP A		653	300	10	32.5	2.3	29	64	33	73	0
CS28 ZP W		653	270	10	23.0	40.1	29	64	33	73	0

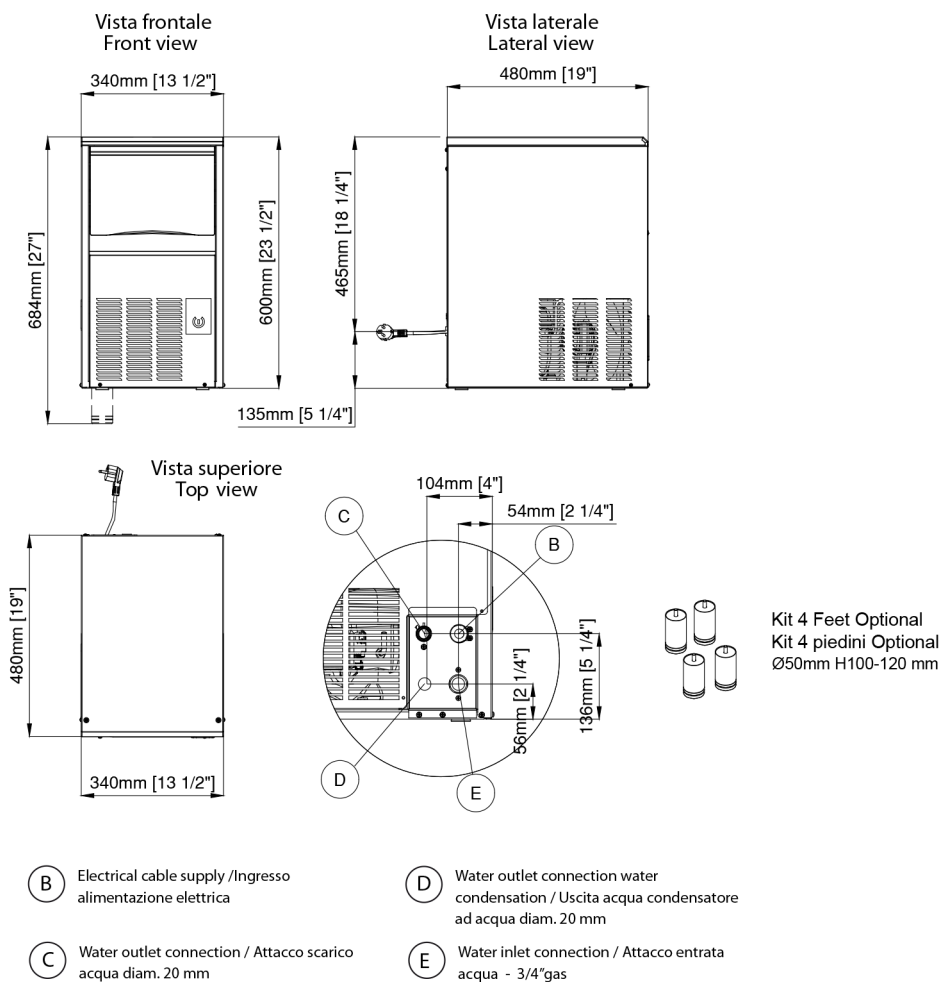

R290