



The spray system produces clear and transparent ice cubes and the patented **Bright Cube** shape grants a longer lasting cube for you to enjoy your cold drinks

Self contained ice maker.

Up to 40kg production per 24/hr of medium ice cube.
15kg storage bin.

Complete with legs, water & drain hoses + 1 ice scoop.
10 AMP power supply.

266 mm drain height including legs to finished floor.



ICE PRODUCTION



Air Cooled Unit

Air Temp.	Water Temperature			
	32°	21°	15°	10°
°C				
°F	90°	70°	60°	50°
10°	32	37	40	41
50°	71	82	88	90
21°	27	32	35	37
70°	60	71	77	82
32°	21	26	28	30
90°	46	57	62	66
38°	18	23	25	27
100°	40	51	55	60

Water Cooled Unit

Air Temp.	Water Temperature			
	32°	21°	15°	10°
°C				
°F	90°	70°	60°	50°
10°	33	38	41	42
50°	73	84	90	93
21°	29	35	38	40
70°	64	77	84	88
32°	28	34	37	39
90°	62	75	82	86
38°	26	33	36	38
100°	57	73	79	84

CUBE TYPE



20g weight BRIGHT CUBE

32mm x 35mm x 37mm

The Bright Ice Cube, appreciated for its versatility, is perfect for use in ice buckets, whiskey on the rocks, cocktails and appetisers. The crystal clear appearance of the Bright Cube makes it essential when a high quality is required.

CONTROL PANEL



Switch On/Off

Ice size regulation screw

BIN CAPACITY

15 kg - 33 lbs | 750 pcs

DIMENSIONS

W x D x H (mm)

500 x 540 x 690/810



560 x 600 x 850

OPERATING REQUIREMENTS

Rejected Heat 1655 W

Air Volume 185 m³/h



220-240/50/1



R134a GWP = 1430

MIN

10°C (50°F)



40°C (104°F)

5°C (41°F)



35°C (95°F)

- 10 %



+ 10 %

1 Bar (14 psi)




5 Bar (70 psi)




SPECIFICATIONS


											
	cond	comp. W	ABS. W	Fuse	kWh/100kg	L / hr	kg	lbs	kg	lbs	Ton CO2 equiv.
CS40 A		1144	590	10	39.4	2.73	39	86	48	106	0.33
CS40 W		1144	540	10	24.7	41.40	39	86	48	106	0.30

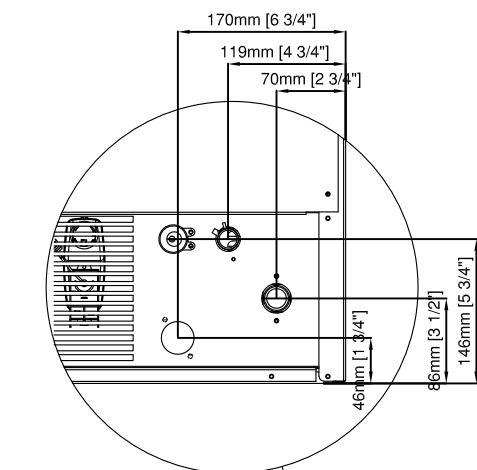


Back View
Vista Posteriore

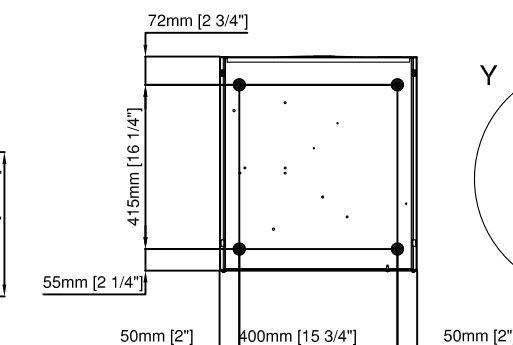



Front View
Vista Frontale

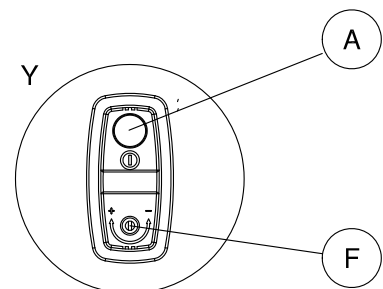

Lateral View
Vista Laterale

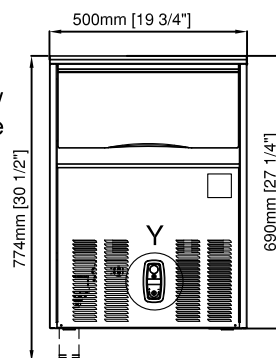

Top View
Vista Superiore

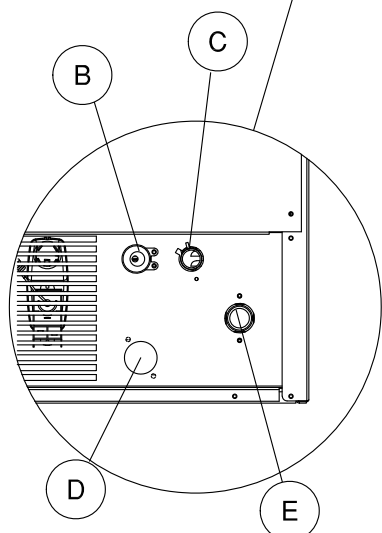

- A** Switch On/Off
- B** Electrical cable supply
- C** Water outlet connection 20mm diam.
- D** Water outlet connection water condensation 20mm diam.
- E** Water inlet connection 3/4" gas
- F** Ice size regulation screw