




Self contained ice maker with in-built water drain pump.
Up to 45kg production per 24/hr of medium ice cube.
22kg storage bin.

Complete with legs, water & drain hoses + 1 ice scoop.
10 AMP power supply.

Water discharge up to 12m away & 1.2m high.

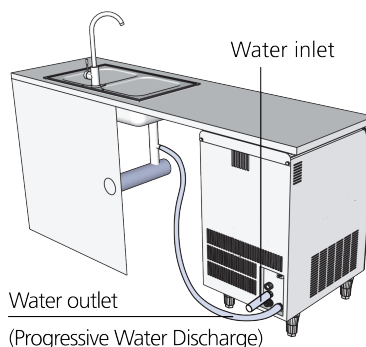

ICE PRODUCTION



Air Cooled Unit

Air Temp.		Water Temperature			
		32°	21°	15°	10°
°C					
°F		90°	70°	60°	50°
10°		42	49	53	54
50°		93	108	117	119
21°		35	41	45	46
70°		77	90	99	101
32°		32	38	42	43
90°		71	84	93	95
38°		28	34	38	39
100°		62	75	84	86

Water Cooled Unit

Air Temp.		Water Temperature			
		32°	21°	15°	10°
°C					
°F		90°	70°	60°	50°
10°		48	50	53	54
50°		106	110	117	119
21°		44	47	49	51
70°		97	104	108	112
32°		42	45	47	49
90°		93	99	104	108
38°		40	43	45	47
100°		88	95	99	104


CUBE TYPE



20g weight
BRIGHT CUBE
32mm x 35mm x 37mm

The Bright Ice Cube, appreciated for its versatility, is perfect for use in ice buckets, whiskey on the rocks, cocktails and appetisers. The crystal clear appearance of the Bright Cube makes it essential when a high quality is required.

CONTROL PANEL



Start-standby Switch
Status Led

BIN CAPACITY

22 Kg - 48.5 lbs | 1100 pcs

DIMENSIONS

W x D x H (mm)

 500 x 580 x 800/835

 560 x 640 x 960

OPERATING REQUIREMENTS

Rejected Heat 1707 W

Air Volume 310 m³/h



220-240/50/1



R290 GWP = 3


MIN		MAX
10°C (50°F)		40°C (104°F)
5°C (41°F)		35°C (95°F)
- 10 %		+ 10 %
1 Bar (14 psi)		5 Bar (70 psi)




SPECIFICATIONS

											
	cond	comp. W	ABS. W	Fuse	kWh/100kg	L / hr	kg	lbs	kg	lbs	Ton CO2 equiv.
CS54 ZP DP A		1167	520	10	23.3	4.5	42	93	50	110	0
CS54 ZP DP W		1167	440	10	20.6	43.4	42	93	50	110	0

Vista frontale
Front view


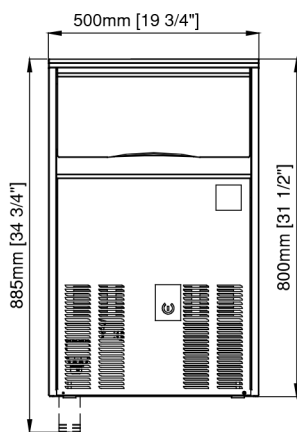


Vista laterale
Lateral view



Kit 4 Feet Optional
Kit 4 piedini Optional
Ø50mm H100-120 mm

Vista superiore
Top view



- (B)** Electrical cable supply / Ingresso alimentazione elettrica
- (C)** Water outlet connection / Attacco scarico acqua diam. 20 mm

- (D)** Water outlet connection water condensation / Uscita acqua condensatore ad acqua diam. 20 mm
- (E)** Water inlet connection / Attacco entrata acqua - 3/4" gas

R290