



# MODULINE

*foodfinish & foodserve technologies*

COOKING AND  
HOLDING SYSTEMS

## CSC031E • CSC051E

Static oven at low temperature cooking and holding



CSC031E



CSC051E

### CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Total thermic insulation with rock or glass wool
- Long lasting door seals made up of food grade of high heat resistance
- Static heating provided by low consumption wire heating element that coils up all the chamber
- Handles to carry by hand

### FUNCTIONAL FEATURES

- Electronic control of the time, temperature and core probe
- Operating temperature 30°C – 120°C

- Two humidity vents: on the door and rear wall
- End-of-cycle buzzer
- Designed for stacking
- Reversible door
- Suction feet
- Chamber with safety thermostat


### STANDARD SUPPLY

- Internal core probe
- Removable GN1/1 tray racks

### OPTIONS & ACCESSORIES

- No

| Model   | Overall dimensions (WxDxH) | Trays capacity | Power kW | Power supply |
|---------|----------------------------|----------------|----------|--------------|
| CSC031E | 450x635x400h               | 3 GN1/1        | 0,7      | AC 230V 50Hz |
| CSC051E | 450x635x550h               | 5 GN1/1        | 1        | AC 230V 50Hz |



### Electronic control with programmer

- A** ON/OFF switch
- B** Display
- C** Time selection key
- D** Keeping warm or regenerating mode programming keys
- E** Temperature selection key
- F** Core probe on/off key (On request)
- G** Temperature decrease key
- H** Temperature increase key
- I** START/STOP key

| Model          | Rated voltage [Vac] | Total input [kW] | Amps. [A] | Connecting wire min. section (type H07 RN-F) [mm <sup>2</sup> ] |
|----------------|---------------------|------------------|-----------|-----------------------------------------------------------------|
| <b>CSC031E</b> | 230                 | 0,7              | 3,1       | 3 x 1                                                           |
| <b>CSC051E</b> | 230                 | 1                | 4,4       | 3 x 1                                                           |


| Model          | Working temperature [°C] | Containers capacity: distance [mm] | Containers max. height [mm]                         | Product max. capacity [kg] | Net weight [kg] |
|----------------|--------------------------|------------------------------------|-----------------------------------------------------|----------------------------|-----------------|
| <b>CSC031E</b> | 30÷120                   | 3 GN1/1 (70)                       | 3 x 65 (h) 1 x 200 (h)<br>1 x 150 (h) + 1 x 65 (h)  | 10                         | 22              |
| <b>CSC051E</b> | 30÷120                   | 5 GN1/1 (70)                       | 5 x 65 (h) 2 x 150 (h)<br>1 x 200 (h) + 1 x 150 (h) | 15                         | 27              |

### TECHNICAL INSTALLATION DIAGRAM



Electricity supply cable inlet



Adjustable vent for release of excess humidity

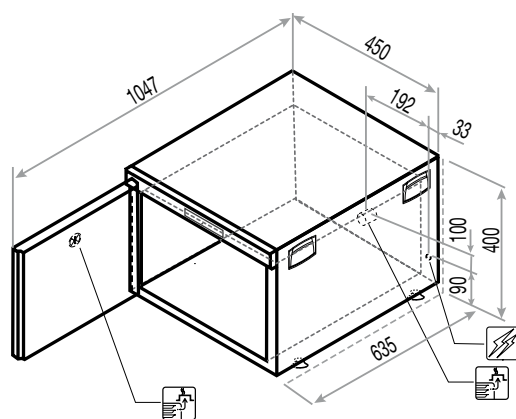

**Model CSC 031E**

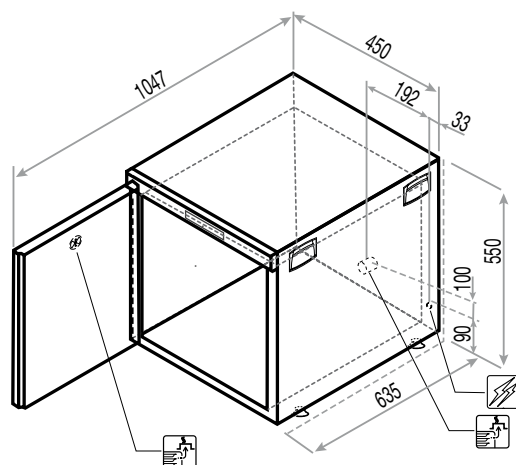

**Model CSC 051E**

