



Betterpan | Tilting Bratt Pans

BETTERPAN is a pressure cooker that offers multi-purpose cooking: for braising, boiling, browning, frying, steaming. The compact size and the multifunctional system of this equipment for catering allows for installation even in less spacious environments. Betterpan is available in either electric or gas-heated versions.

Versatile and efficient tilting bratt pan

Thanks to the electronic application, you can set different cooking programs (e.g. for steaming) and produce several dishes. The compact size and versatility make this pressure bratt pan an irreplaceable element in centralised kitchens, catering services or in public canteens.

DIRECT ELECTRIC HEATING NON PRESSURISED

MODEL	CAPACITY lt	POWER kW	DIMENSIONS mm	SURFACE dmq	NOTES
DBRE 110 V1	110	17	1470 x 1125 x 1030H	52	GN 2(1/1)+2(1/2)
DBRE 145 V1	145	20	1725 x 1125 x 1030H	69	GN 4(1/1)
DBRE 180 V1	180	27	2000 x 1125 x 1030H	87	GN 4(1/1)+2(1/2)
DBRE 220 V1	220	30	2255 x 1125 x 1030H	103	GN 6(1/1)
DBRE 110C V1	110	17	1470 x 1125 x 1030H	52	GN 2(1/1)+2(1/2)
DBRE 145C V1	145	20	1725 x 1125 x 1030H	69	GN 4(1/1)
DBRE 180C V1	180	27	2000 x 1125 x 1030H	87	GN 4(1/1)+2(1/2)
DBRE 220C V1	220	30	2255 x 1125 x 1030H	103	GN 6(1/1)




Betterpan can be used for

- Pasta sauces and Rice
- Chicken
- Escalopes
- Stew
- Cotechino (large boiled pork sausage)
- Spare ribs and Meat balls
- Omelette
- Legumes
- Fennel, Potatoes, Spinach and Carrots


boiling | **braising** | pasteurising | **tilting** | mixing | cooling | **frying** | underpressure | vacuum cooking | cutting | washing | drying

TECHNICAL DRAWING MOD. DRBE 110(-C) V1

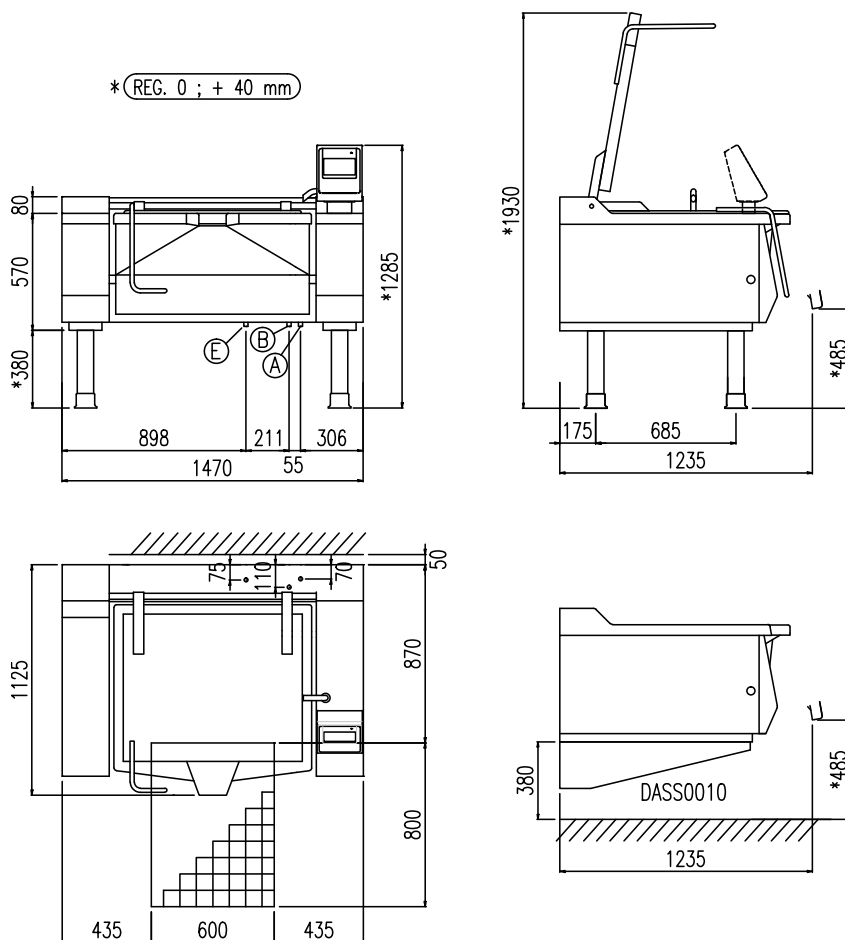


E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	17.00 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	380-415V 3N ~ 50/60Hz
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	3/4"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	3/4"

TECHNICAL DRAWING MOD. DRBE 145(-C) V1

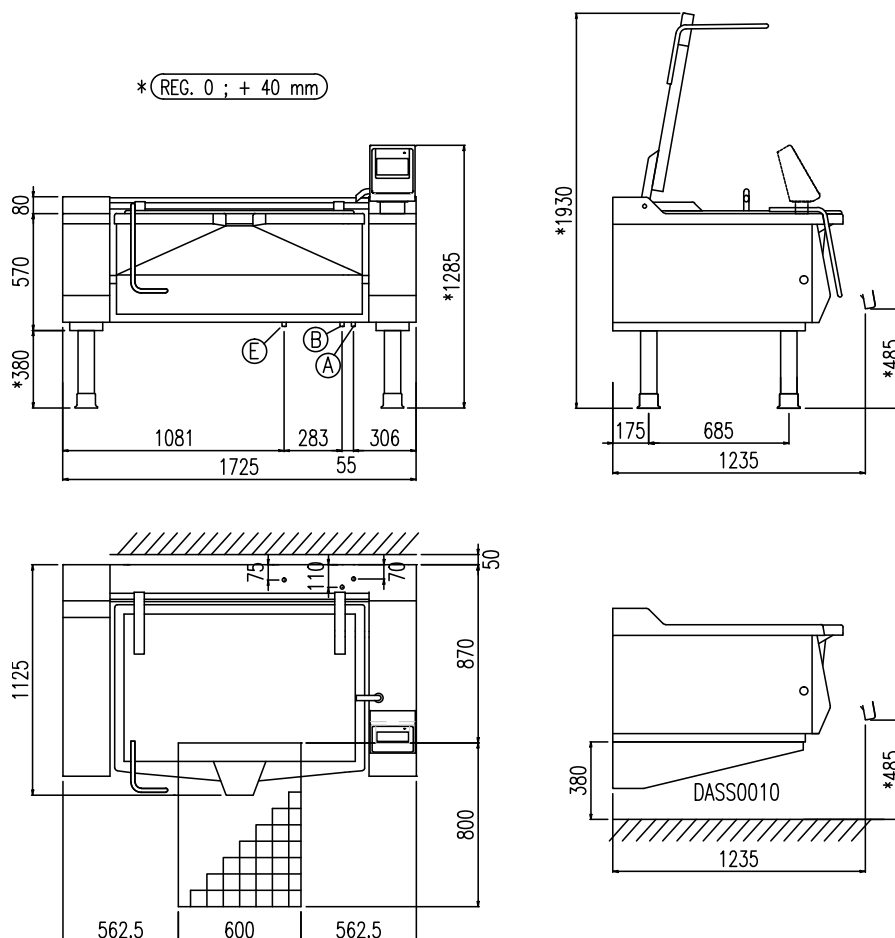


E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	20.00 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	380-415V 3N ~ 50/60Hz
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	3/4"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	3/4"

TECHNICAL DRAWING MOD. DRBE 180(-C) V1

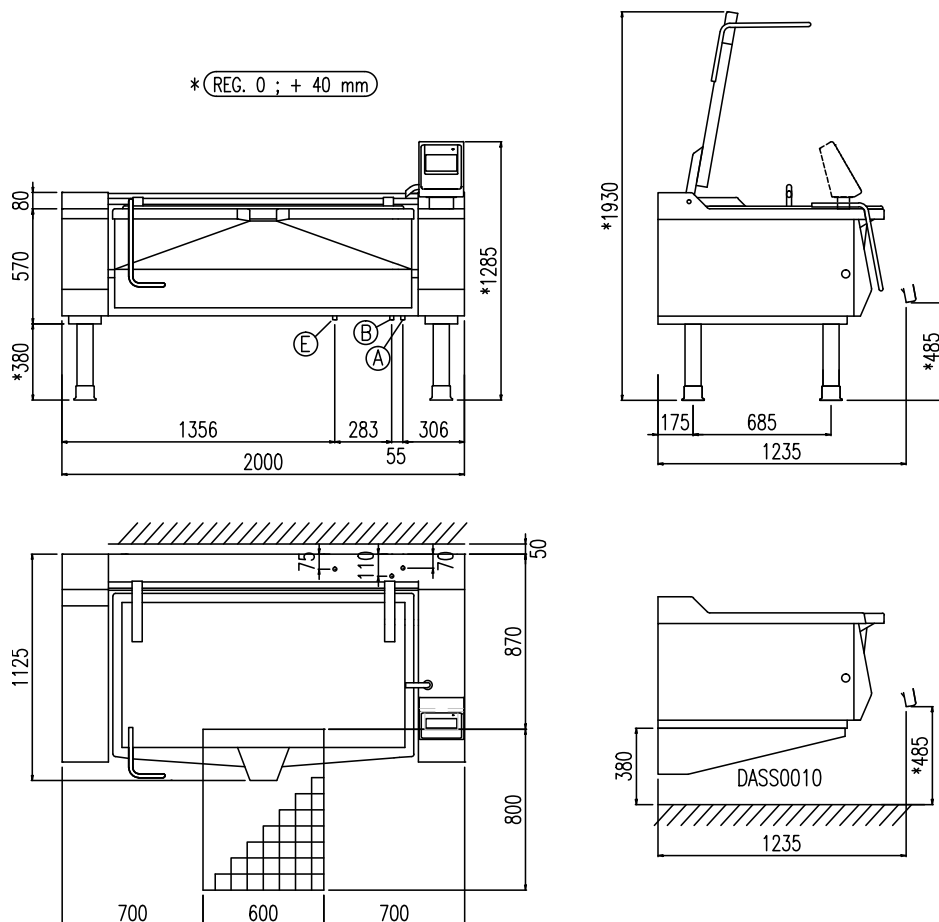

E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	27.00 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	380-415V 3N ~ 50/60Hz
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	3/4"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	3/4"

TECHNICAL DRAWING MOD. DRBE 220(-C) V1

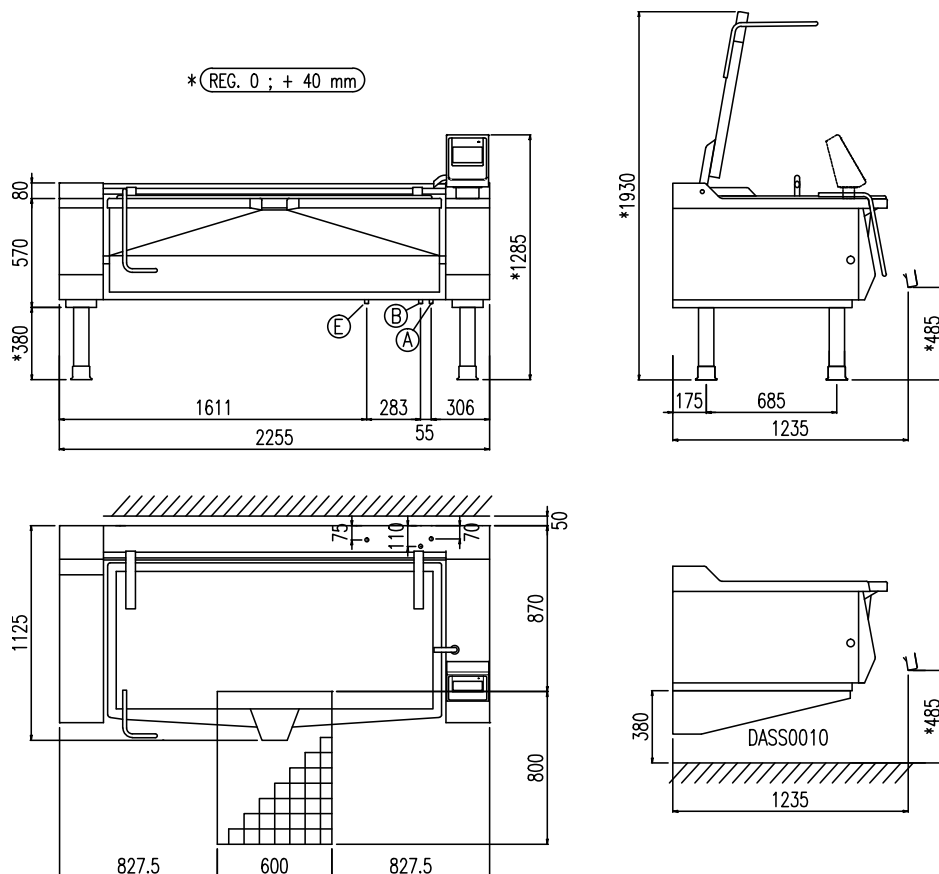

E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	30.00 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	380-415V 3N ~ 50/60Hz
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	3/4"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	3/4"