



Betterpan | Tilting Bratt Pans

BETTERPAN is a pressure cooker that offers multi-purpose cooking: for braising, boiling, browning, frying, steaming. The compact size and the multifunctional system of this equipment for catering allows for installation even in less spacious environments. Betterpan is available in either electric or gas-heated versions.

Versatile and efficient tilting bratt pan

Thanks to the electronic application, you can set different cooking programs (e.g. for steaming) and produce several dishes. The compact size and versatility make this pressure bratt pan an irreplaceable element in centralised kitchens, catering services or in public canteens.

DIRECT ELECTRIC HEATING PRESSURISED

MODEL	CAPACITY lt	POWER kW	DIMENSIONS mm	SURFACE dmq	NOTES
DBRE 110A V1	110	17	1470 x 1125 x 1030H	52	GN 2(1/1)+2(1/2)
DBRE 145A V1	145	20	1725 x 1125 x 1030H	69	GN 4(1/1)
DBRE 180A V1	180	27	2000 x 1125 x 1030H	87	GN 4(1/1)+2(1/2)
DBRE 110A-C V1	110	17	1470 x 1125 x 1030H	52	GN 2(1/1)+2(1/2)
DBRE 145A-C V1	145	20	1725 x 1125 x 1030H	69	GN 4(1/1)
DBRE 180A-C V1	180	27	2000 x 1125 x 1030H	87	GN 4(1/1)+2(1/2)




Betterpan can be used for

- Pasta sauces and Rice
- Chicken
- Escalopes
- Stew
- Cotechino (large boiled pork sausage)
- Spare ribs and Meat balls
- Omelette
- Legumes
- Fennel, Potatoes, Spinach and Carrots


boiling | **braising** | pasteurising | **tilting** | mixing | cooling | **frying** | underpressure | vacuum cooking | cutting | washing | drying

TECHNICAL DRAWING MOD. DRBE 110A(-C) V1

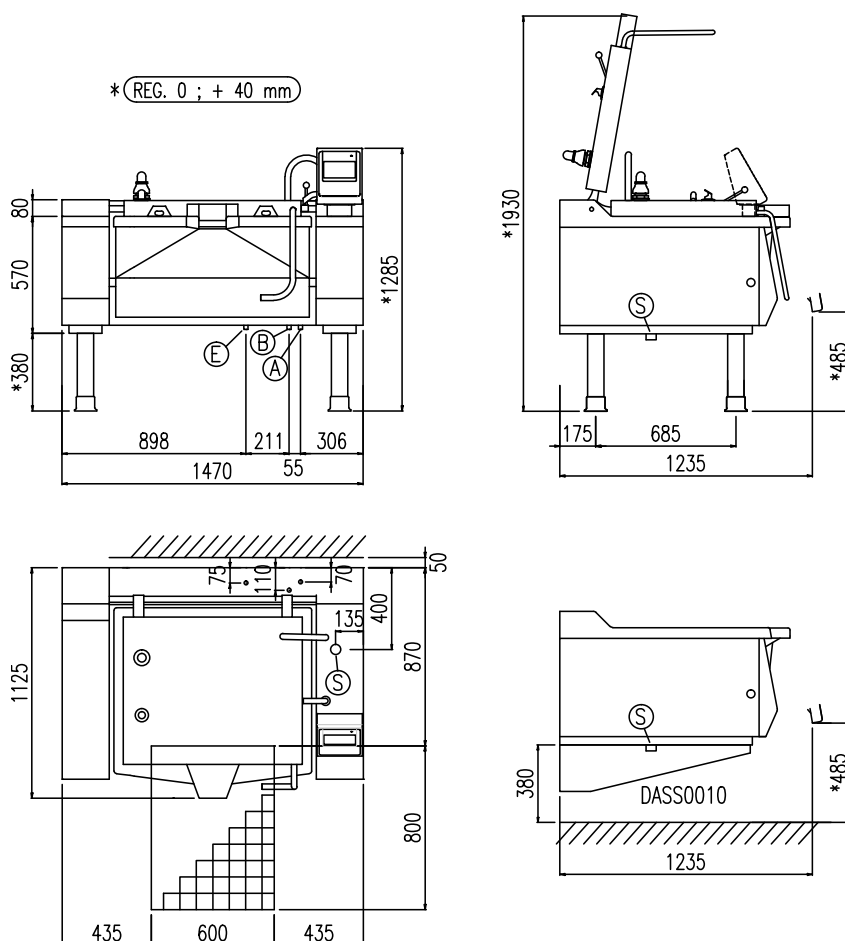


E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	17.00 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	380-415V 3N ~ 50Hz
S1	Scarico Condensa autocl. Condensate drain press.	Kondenswasserablauf Druk. Sortie du condenseur press.	1"
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	3/4"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	3/4"

TECHNICAL DRAWING MOD. DRBE 145A(-C) V1

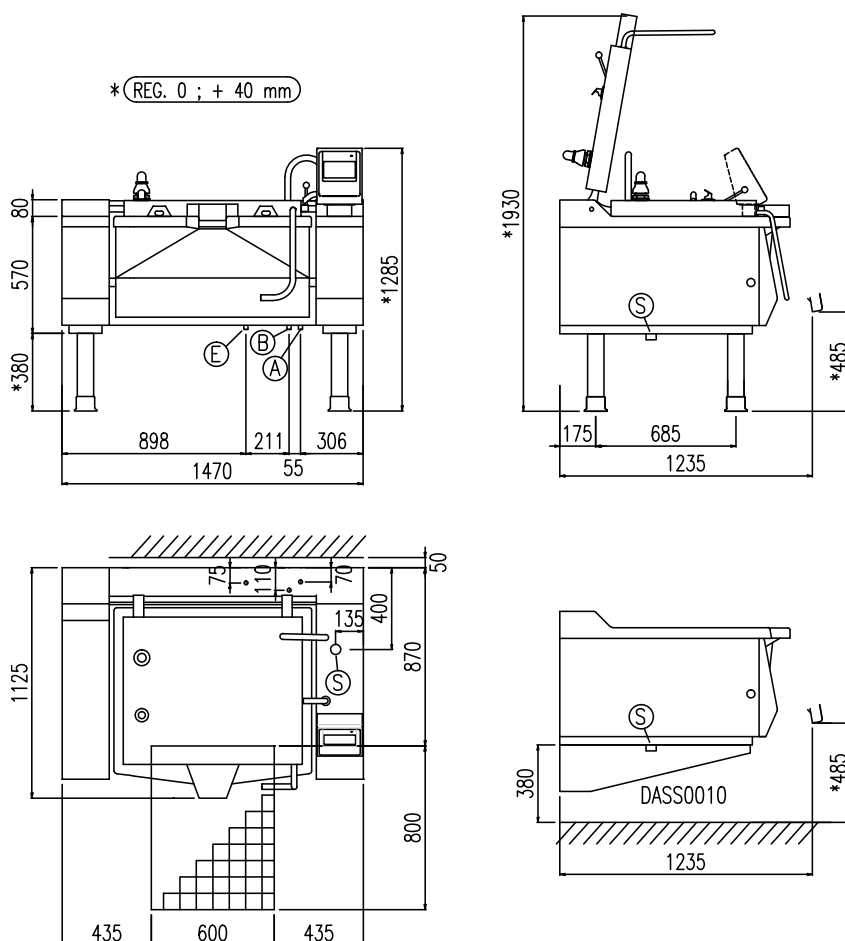

E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	17.00 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	380-415V 3N ~ 50Hz
S1	Scarico Condensa autocl. Condensate drain press.	Kondenswasserablauf Druk. Sortie du condenseur press.	1"
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	3/4"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	3/4"

TECHNICAL DRAWING MOD. DRBE 180A(-C) V1

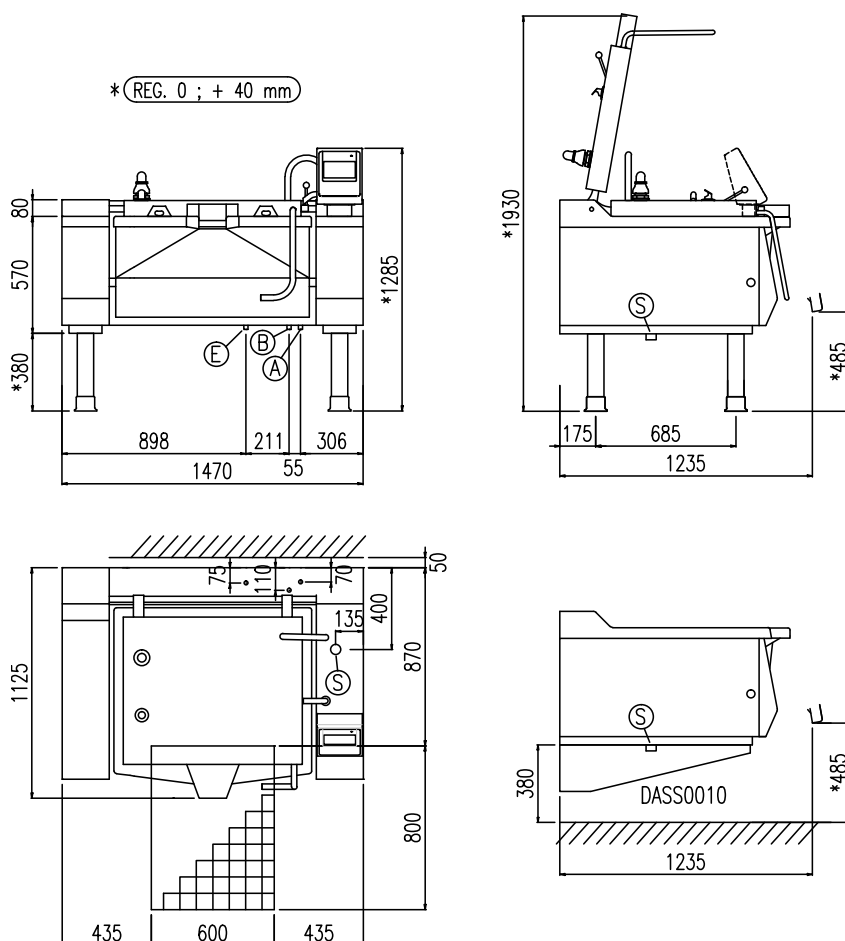

E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	17.00 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	380-415V 3N ~ 50Hz
S1	Scarico Condensa autocl. Condensate drain press.	Kondenswasserablauf Druk. Sortie du condenseur press.	1"
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	3/4"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	3/4"