


GCR201 PLUS

GCR201 Trolleys: 1 x GN 1/1 (600x400)

BLASTCHILLERS



FUNCTIONS:

5 functions

Blast Chilling +90 / +3°C

Blast Chilling +90 / +3°C

Thawing

Retarder proofer

Low temperature cooking

Blast chillig yield (+3°C)/Kg **120**

Shock freezing yield (-18°C)/Kg **80**

Climatic class **4**

Consumption (kWh/Kg) EN17032 **0,02**

DATI TECNICI DI BASE

Net width (mm) **1500**

Net depth (mm) **1330**

Net height (mm) **2230**

Net weight (Kg) **410**

N° trays GN1/1 (535x325) or 600x400 **1 GN1/1 - 600X400**

Electrical power **380-420/3/50 + N**

Elec. Power** (W) **5595**

Max absorbed current (A)** **9,06**

compressor (HP) **7,5**

Freon (Gas) **R452A**

External width (mm) **2350**

Packing depth (mm) **1500**

External height (mm) **1700**

Gross weight (Kg) **490**



MAIN FEATURES

Full Touch 7-inch Display

Panel construction capacity GN 1/1, GN2/1, 600x400, 600x800

Finely "Scotch Brite" satined exterior

80 mm insulation thickness in CFC and HCFC-free PU, density 42 kg/m3

Floor thickness 60 mm

Large storage capacity cell featuring rounded corners for easy cleaning

Ergonomic handles

Front electric panel that can be fully inspected

Drain plug

Air distribution with new evaporator deflector

OPTIONAL electronic expansion valve

PLUS versions ventilation regulation by inverter

Connectivity 4.0

Load capacity pursuant to EN17032


OPTIONAL weather sealed and soundproofed condensing units

Internal set-up: 8 plastic grids GN2/1 + 4 MIDDLE GRIDS



ALLESTIMENTI

Heated Multipoint probe


201 (C20) "S"

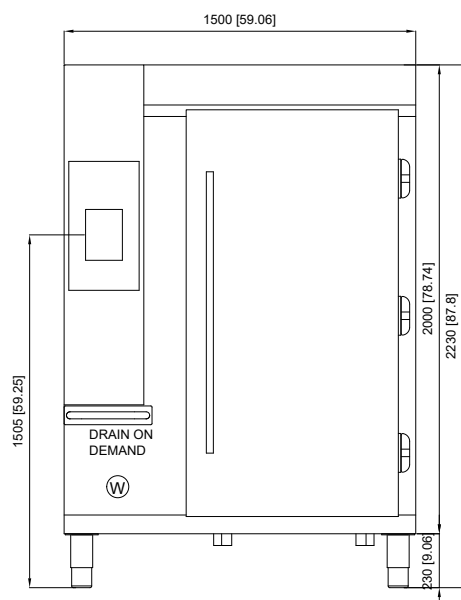

FRONT VIEW

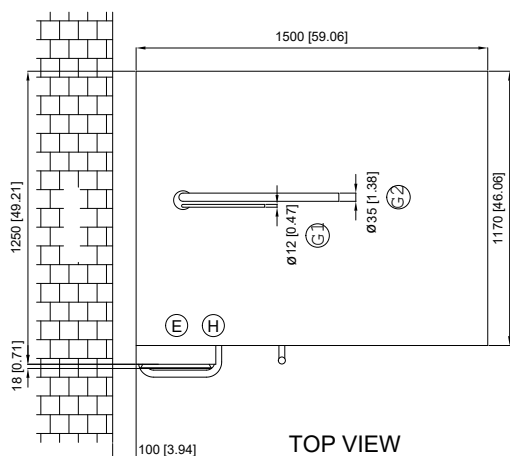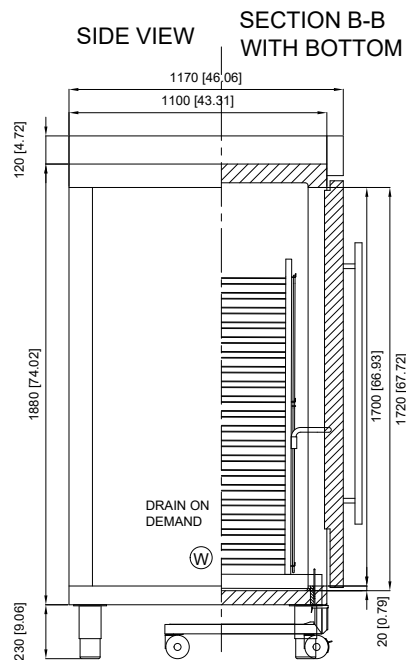

TOP VIEW

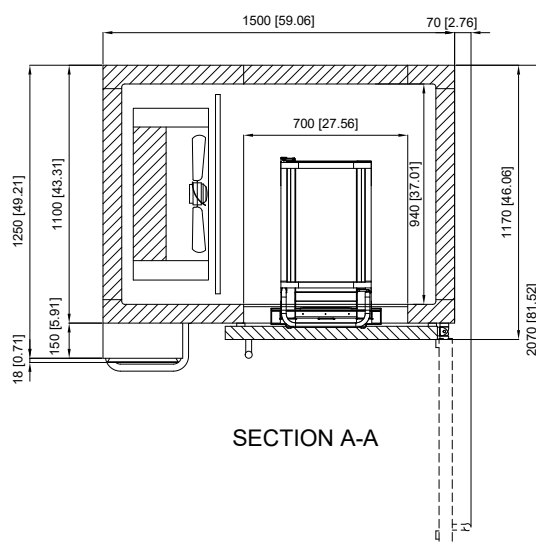

SECTION A-A

- ① INGRESSO REFRIGERANTE
REFRIGERANT INLET
- ② USCITA REFRIGERANTE
REFRIGERANT OUTLET
- ③ CONNESSIONE ELETTRICA
ELECTRICAL CONNECTION
- ④ CONNESSIONE SCARICO
DRAIN CONNECTION
- ⑤ CONNESSIONE H2O
WATER CONNECTION

DIMENSIONI mm
DIMENSIONS [in]