
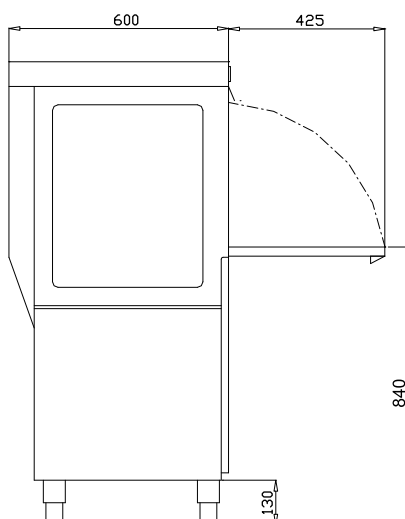


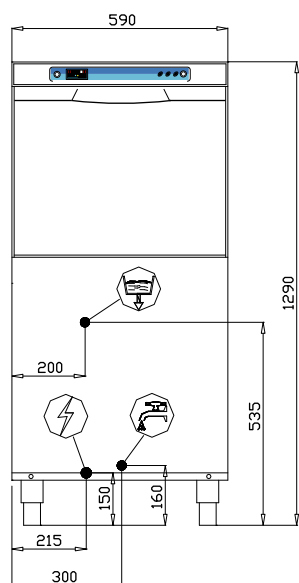

	WATER CONNECTION 3/4" GAS
	DRAINING PIPE Ø 24mm
	ELECTRICAL SUPPLY

TECHNICAL DATA						
EXTERNAL DIMENSIONS						
width		590 mm				
depth		600 mm				
height		1290 mm				
WEIGHT		68.5 kg				
VOLTAGE		400V 3N 50Hz				
POWER REQUIRED		6900 W				
WATER HARDNESS		2-8 °F				
INLET WATER PRESSURE		200-400 kPa				
CROCKERY DIMENSIONS						
plates diameter		380 mm				
glasses max. height		355 mm				
RACK DIMENSIONS		500X500 mm				
RACK EQUIPMENT		1XC40 - 1XC44 - 1X15060				
WASHING CYCLES (sec)		1(60)	2(90)	3(120)	4(180)	----
WATER SUPPLY 55°C						
racks/h(*) ⁽¹⁾		60	40	30	20	--
WATER SUPPLY 10°C						
racks/h(*) ⁽¹⁾		26	26	26	20	--
WATER CONSUMPTION / CYCLE (water pressure 200kPa)		2.3 L				
BOILER CAPACITY		5.7 L				
BOILER HEATING ELEMENT		6000 W				
RINSING TEMPERATURE (SET)		85°C				
TANK CAPACITY		29 L				
TANK HEATING ELEMENT		2700 W				
TANK TEMPERATURE (SET)		55°C				
PUMP POWER		900 W (500 L/min***)				
DRAIN PUMP (optional)		25 W h MAX drainig 0.8m (40 L/min***)				
NOISE		63 dB(A)				

(*) STANDARD TERMOSTOP

(***) MAXIMUM FLOW RATE

⁽¹⁾ In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.