

MODULINE

foodfinish & foodserve technologies

HCT132E • HCT102E

Refrigerate holding trolley (positive)

HOLDING SYSTEMS



HCT132E



HCT102E

CONSTRUCTION FEATURES

- Chamber with radiused corners and removable side racks to facilitate cleaning
- Rubber bumpers
- Highly efficient and thick insulation, casing injected with CFC-free polyurethane foam
- Magnetic door seal
- Cooling through air-cooled evaporator
- Ecological type compressor unit (R404A)
- Mounted on four 150mm diameter castors, two of which with brake
- Ergonomic handles for pushing and guiding
- Easy access to facilitate maintenance and repair

FUNCTIONAL FEATURES

- Electronic temperature control with defrosting programme
- Simplified, user-friendly controls
- Operating temperature 0°C / +5°C
- Condensate evaporation tray


STANDARD SUPPLY

- Removable GN2/1 and GN1/1 tray racks

OPTIONS & ACCESSORIES




- Stainless steel plate baskets

Model	Overall dimensions (WxDxH)	Trays capacity	Plates capacity Plates Ø 230-310 Containers GN1/2	Power kW	Power supply
HCT132E	800x885x1840 h	13 x GN2/1 - 26 x GN1/1	48	0,65	AC 230V 50Hz
HCT102E	800x885x1840 h	10 x GN2/1 - 20 x GN1/1	32	0,65	AC 230V 50Hz



TECHNICAL INSTALLATION DIAGRAM

HCT132E

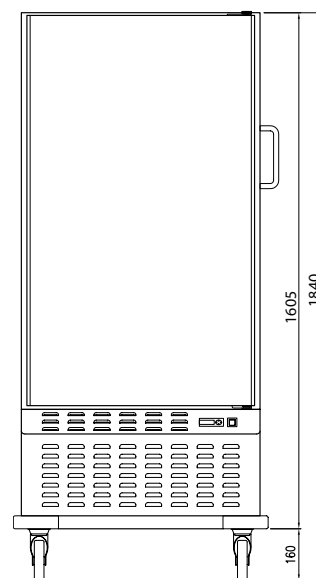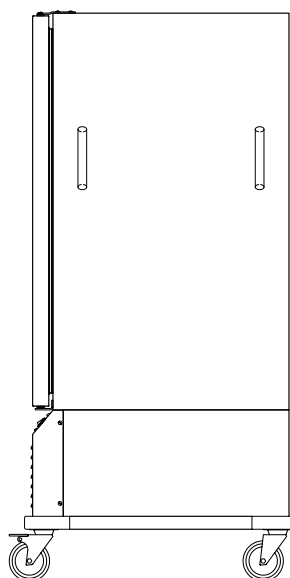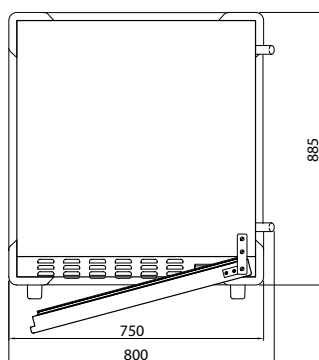

HCT102E

