



HHB048E

Static holding trolley



CONSTRUCTION FEATURES

- Tightness chamber with radiuses corners
- Rubber bumpers
- Total thermic insulation with rock or glass wood
- Long lasting front and door seals made up of food glade of high heat resistance
- Removable si de racks to facilitate cleaning
- Static heating provided by low consumption wise heating element that colis up all the chamber
- Snap-shut door
- Mounted on four 125 mm diameter castors, two of witch with brake
- Ergonomic handle for pushing and guiding
- Easy access to facilitate maintenance and repair

FUNCTIONAL FEATURES

- Electronic control of the temperature
- Operating temperature 30°÷120°C
- Two adjustable humidity vents on the door
- Chamber with safety thermostat

STANDARD SUPPLY

• Two shelves with grid GN2/1


OPTIONS & ACCESSORIES

- Stainless steel plate baskets
- Additional shelves with grid GN2/1
- Guides for gastronorm containers





MODULINE foodsinish & foodserve technologies


HOLDING SYSTEMS

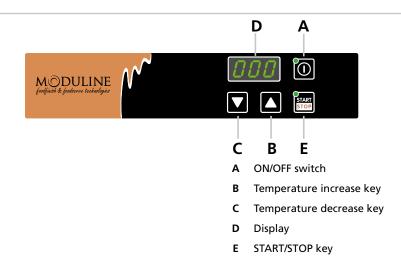

TECHNICAL INSTALLATION DIAGRAM







Electricity supply cable inlet

| Model | Overall dimensions (W x D x H) - mm | Trays capacity | Plates capacity ø260 | Plates capacity ø320 | Power kW | Power supply |
|---------|--|---------------------------|----------------------------|----------------------------|-------------|------------------|
| ННВ048Е | 910 x 860 x 1040 h | 8 x GN 2/1 16 x GN 1/1 | 48 | 32 | 0,75 | AC 230 V / 50 Hz |