

KST 82

400L two door confectionery table without working top

functions

Temperature range	-2 / +8°C
Energy label	C


technical data


Width (mm)	1408
Depth (mm)	790
Height (mm)	850
Weight (kg)	140
Capacity (L)	400
N° trays 1/1GN (535x325) or 600x400	16
Electric connection (V/~/Hz)	230/1/50
Electric power (W)	270
Cooling power (W)	324
Internal width (mm)	978
Internal depth (mm)	670
Internal height (mm)	600
Gross weight (kg)	156
Noise level [dB(A)]	< 70
Refrigerant type (gas)	R134A



main features

- The CONFECTIONERY series refrigerated tables with electronic control, ventilated, are constructed internally and externally in AISI 304 18/10 stainless steel.
- Single frame construction, capacity EN.
- PU, HCFC free insulation, thickness 50 mm, density 42 kg/m3.
- Environmentally-friendly R134a / R452A gas.
- Automatic defrosting and evaporation device condensate water without electricity input.
- Large storage capacity cells featuring rounded corners for easy cleaning.
- Ergonomic handles and magnetic seals on 4 sides.
- Feet (Ø 2") with adjustable height 150 ÷ 200 mm in
- AISI 304 18/10 steel.
- Self-closing doors with 100° opening lock and reversibility with accessory kit.
- Stainless steel snap-on rack supports and uprights, removable with no need to use tools for easier cleaning operations.
- Power supply voltage 230V / 1Ph / 50Hz

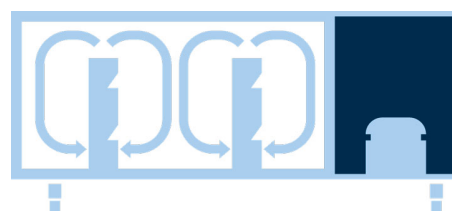

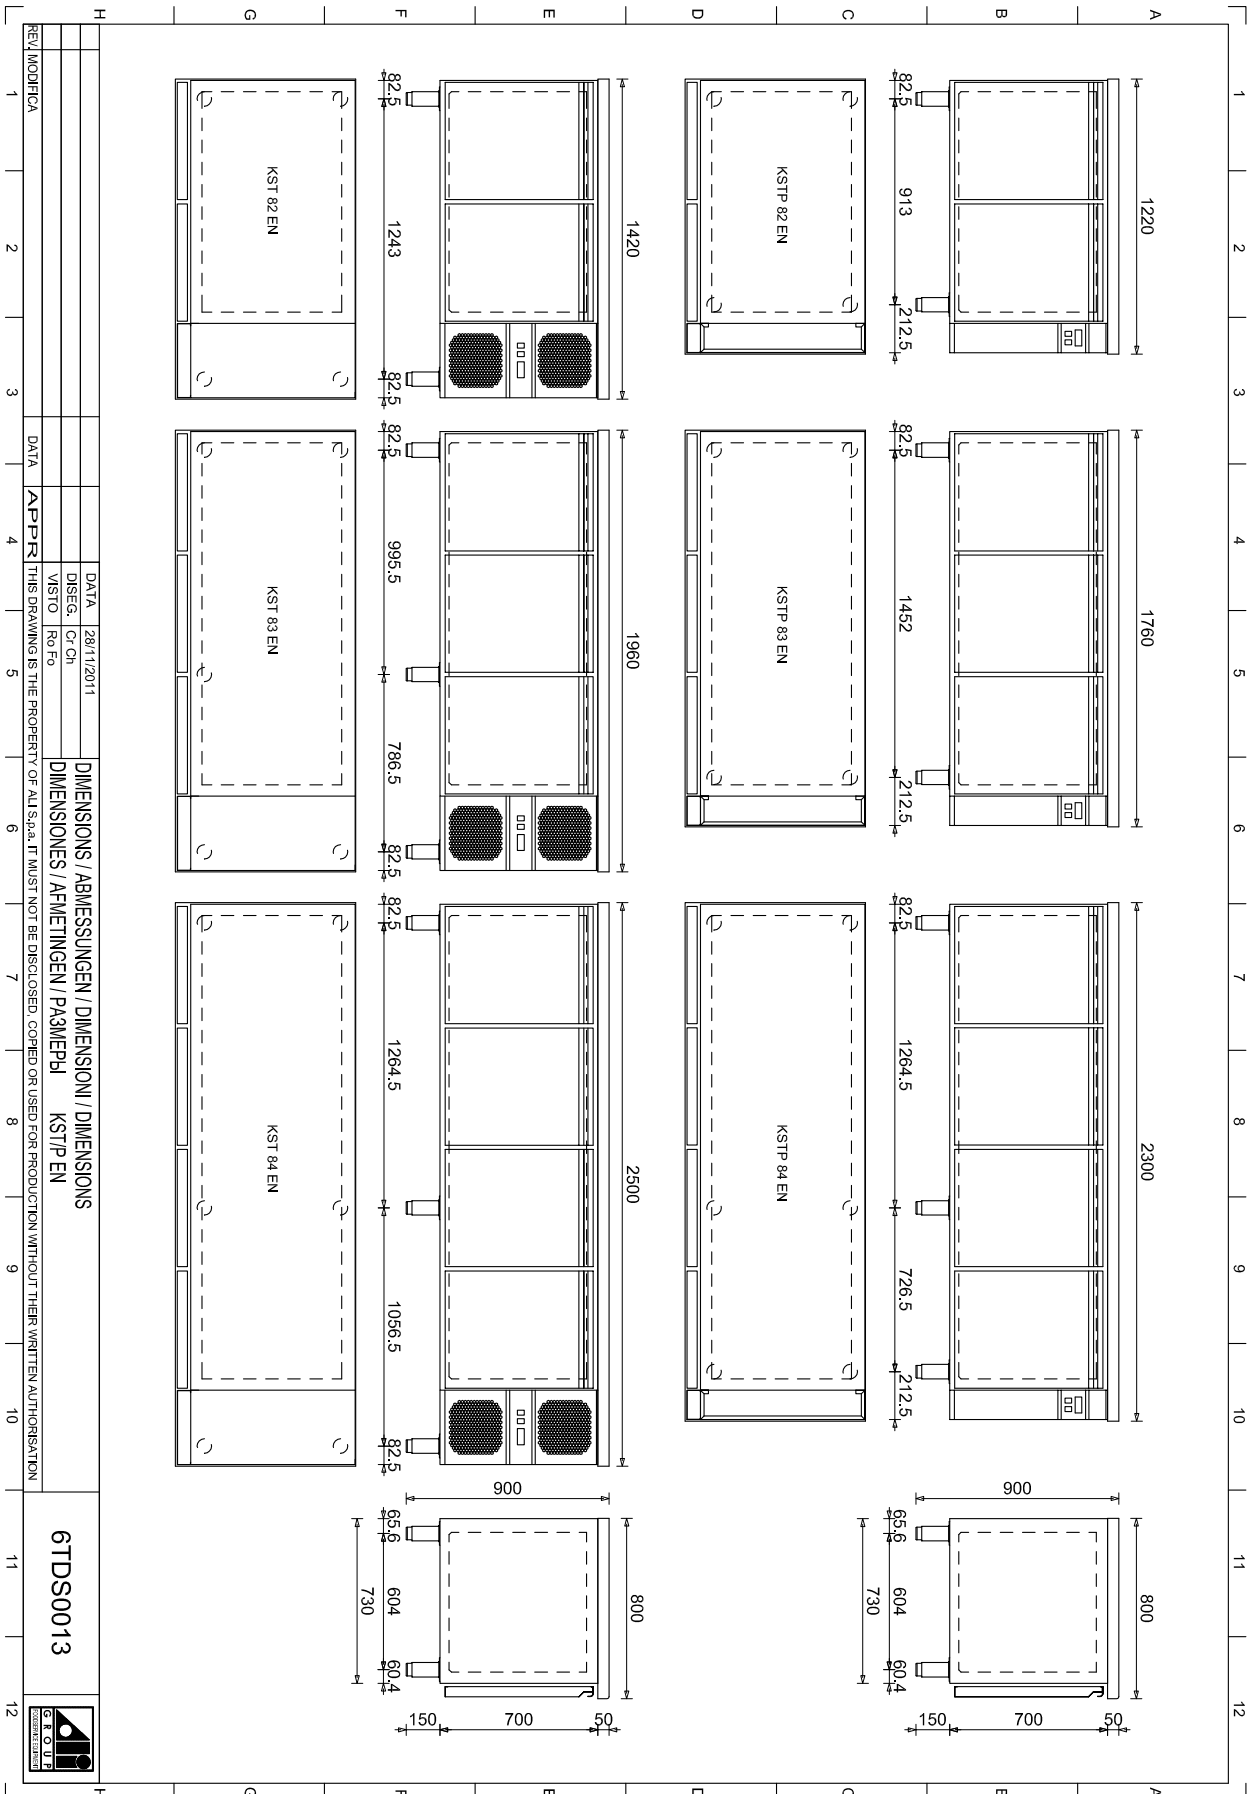

6TDS0013

