

M O D U L I N E  
*food service*

HOLDING SYSTEMS

## MD 122E • MD 123E

Refrigerate holding trolley (positive)



MD 122E



MD 123E

### CONSTRUCTION FEATURES

- Chamber with radiused corners and removable side racks to facilitate cleaning
- Plastic bumpers
- Highly efficient and thick insulation, casing injected with CFC-free polyurethane foam
- Magnetic door seal
- Cooling through air-cooled evaporator
- Ecological type compressor unit (R404A)
- Mounted on four 150mm diameter castors, two of which with brake
- Ergonomic handles for pushing and guiding
- Easy access to facilitate maintenance and repair

### FUNCTIONAL FEATURES

- Electronic temperature control with defrosting programme
- Simplified, user-friendly controls
- Operating temperature 0°C / +5°C
- Condensate evaporation tray

### STANDARD SUPPLY

- Removable GN2/1 and GN1/1 tray racks

### OPTIONS & ACCESSORIES


- Stainless steel plate baskets

| Model          | Overall dimensions<br>(WxDxH) | Trays capacity          | Plates capacity<br>Plates Ø 230-320<br>Containers GN1/2 | Power<br>kW | Power supply |
|----------------|-------------------------------|-------------------------|---------------------------------------------------------|-------------|--------------|
| <b>MD 122E</b> | 820x875x1765 h                | 13 x GN2/1 - 26 x GN1/1 | 48                                                      | 0,90        | AC 230V 50Hz |
| <b>MD 123E</b> | 820x875x1765 h                | 10 x GN2/1 - 20 x GN1/1 | 32                                                      | 0,90        | AC 230V 50Hz |

| Model          | Total input [kW] | Power supply |
|----------------|------------------|--------------|
| <b>MD 122E</b> | 0,90             | AC 230V 50Hz |
| <b>MD 123E</b> | 0,90             | AC 230V 50Hz |

## TECHNICAL INSTALLATION DIAGRAM

### MD 122E

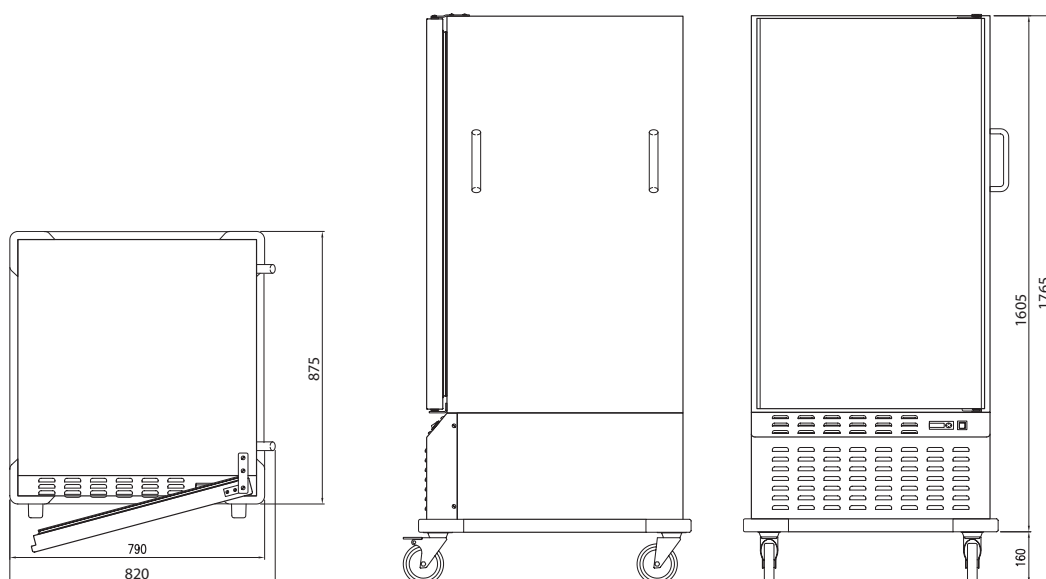

### MD 123E

