



M O D U L I N E

food service

REGENERATING AND HOLDING SYSTEMS



MFP 40E

Floor holding cabinet

RFP 40E

Floor regenerating
cabinet (on dishes)

CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Internal AISI 304 18/10 stainless steel bumpers for trolley's introduction
- Total thermic insulation with rock or glass wool
- Long lasting front seals made up of food grade of high heat resistance
- Ventilated heating provided by high efficiency protected heating elements
- Door fitted with three point locking system
- Easy access to facilitate maintenance and repair

STANDARD SUPPLY

- Climachef


FUNCTIONAL FEATURES

- Electronic control panel of temperature, time and humidity with LCD touch-screen
- End-of-cycle buzzer
- Simplified, user-friendly controls
- Automatic control of the humidity's percentage in the chamber, Climachef system
- Operating temperature $30^{\circ}\text{C} \div 160^{\circ}\text{C}$
- Automatic humidity vent
- Chamber can accommodate different sized plate or tray rack transport trolleys
- Chamber with safety thermostat
- Delayed start timer

OPTIONS & ACCESSORIES

- Core probe with the possibility to register 30 different temperatures and save them in the HACCP report (available only with USB port device)
- Concealed water storage tank
- USB port saving device HACCP
- GN pans cart
- Plates cart
- Cart thermal cover
- Glass door and lighting

Model	Overall dimensions and oven interior (WxDxH)	Trays capacity	Plates capacity Plates Ø230-310	Power kW	Power supply
MFP 40E	1110x1080x1950h / 740x945x1860h	40 x GN 1/1	126	7,50	3N AC 400V 50Hz
RFP 40E	1110x1080x1950h / 740x945x1860h	40 x GN 1/1	126	23,00	3N AC 400V 50Hz

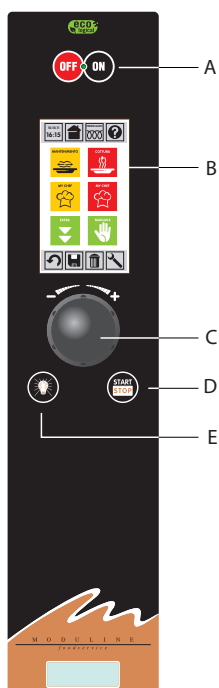



Electronic control and programmer

- A ON/OFF switch
- B Display
- C Setting knob and select "ENTER"
- D Push-button "START/STOP"
- E Push-button cooking chamber lighting

Model	Rated voltage [Vac]	Total input [kW]	Amps. [A]	Connecting wire min. section (type H07 RN-F) [mm ²]	Water pressure [kPa]
MFP 40E	3N - 400	7,5	10,8	5 x 1,5	150÷500
RFP 40E	3N - 400	23,0	33,2	5 x 6	150÷500

TECHNICAL INSTALLATION DIAGRAM

MFP 40E RFP 40E

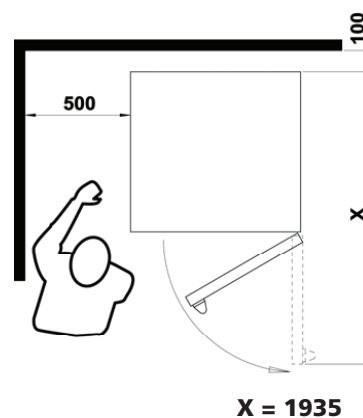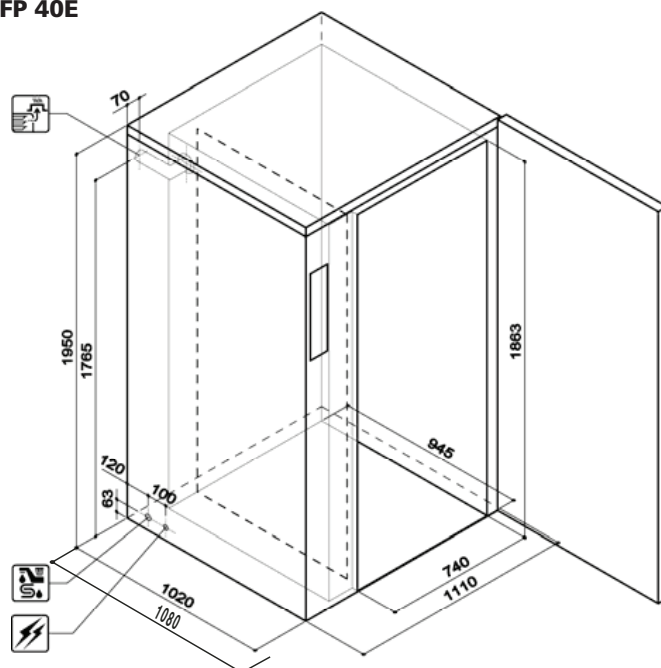

X = 1935

Electricity supply cable inlet



Adjustable vent for release of excess humidity



Chamber drain



Softened water inlet



OPTIONAL
Removable tank



MODULINE SRL - Via dell'Industria, 11 - Z.I. San Giacomo di Veglia - 31029 Vittorio Veneto (TV) - ITALY
tel +39 0438 912 270 (4 linee r.a.) - fax +39 0438 912 323 - www.moduline.it - info@moduline.it