



# M O D U L I N E

## food service

### REGENERATING AND HOLDING SYSTEMS



## MFP 42E

Floor holding cabinet

## RFP 42E

Floor regenerating cabinet (on dishes) – Through model

### CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Internal AISI 304 18/10 stainless steel bumpers for trolley's introduction
- Total thermic insulation with rock or glass wool
- Long lasting front seals made up of food grade of high heat resistance
- Ventilated heating provided by highefficiency protected heating elements
- Door fitted with three point locking system
- Easy access to facilitate maintenance and repair

### STANDARD SUPPLY

- Climachef


### FUNCTIONAL FEATURES

- Electronic control panel of temperature, time and humidity with LCD touch-screen
- End-of-cycle buzzer
- Simplified, user-friendly controls
- Automatic control of the humidity's percentage in the chamber, Climachef system
- Operating temperature  $30^{\circ}\text{C} \div 160^{\circ}\text{C}$
- Automatic humidity vent
- Chamber can accommodate different sized plate or tray rack transport trolleys
- Chamber with safety thermostat
- Delayed start timer

### OPTIONS & ACCESSORIES

- Core probe with the possibility to register 30 different temperatures and save them In the HACCP report (available only with USB port device)
- Concealed water storage tank
- USB port saving device HACCP
- GN pans cart
- Plates cart
- Cart thermal cover
- Glass door and lighting

Model	Overall dimensions and oven interior (WxDxH)	Trays capacity	Plates capacity Plates Ø230-310	Power kW	Power supply
<b>MFP 42E</b>	1110x1080x1950h / 740x955x1860h	<b>40 x GN 1/1</b>	<b>126</b>	<b>7,5</b>	3N AC 400V 50Hz
<b>RFP 42E</b>	1110x1080x1950h / 740x955x1860h	<b>40 x GN 1/1</b>	<b>126</b>	<b>23,00</b>	3N AC 400V 50Hz

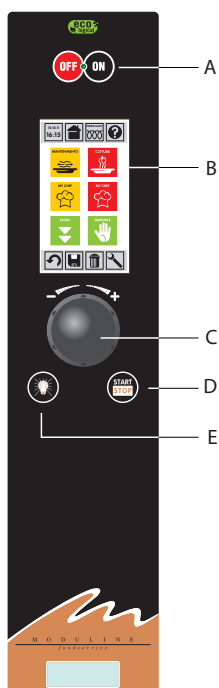



### Electronic control and programmer

- A ON/OFF switch
- B Display
- C Setting knob and select "ENTER"
- D Push-button "START/STOP"
- E Push-button cooking chamber lighting

Model	Rated voltage [Vac]	Total input [kW]	Amps. [A]	Connecting wire min. section (type H07 RN-F) [mm <sup>2</sup> ]	Water pressure [kPa]
<b>MFP 42E</b>	3N - 400	7,5	10,8	5 x 1,5	150÷500
<b>RFP 42E</b>	3N - 400	23,0	33,2	5 x 6	150÷500

### TECHNICAL INSTALLATION DIAGRAM

**MFP 42E**  
**RFP 42E**

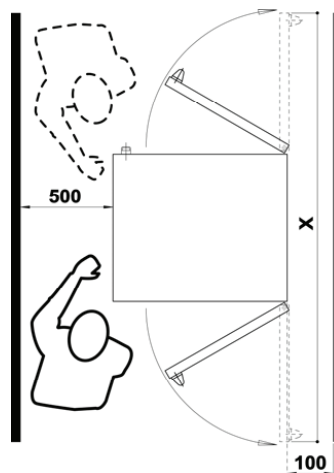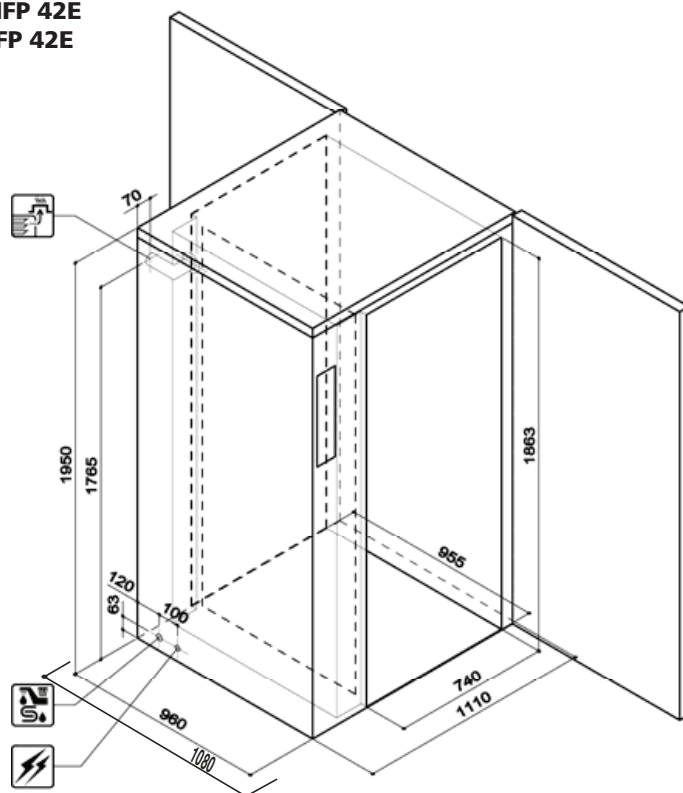

**X = 2790**



**OPTIONAL**  
Removable tank