

M O D U L I N E

food service

HOLDING SYSTEMS

MR 122E • MR 123E

Refrigerate holding trolley (positive)



MR 122E



MR 123E

CONSTRUCTION FEATURES

- Chamber with radiused corners and removable side racks to facilitate cleaning
- Plastic bumpers
- Highly efficient and thick insulation, casing injected with CFC-free polyurethane foam
- Magnetic door seal with incorporated special heating element to evaporate the condensation
- Cooling through air-cooled evaporator
- Ecological type compressor unit (R404A)
- Mounted on four 150mm diameter castors, two of which with brake
- Ergonomic handles for pushing and guiding
- Easy access to facilitate maintenance and repair

FUNCTIONAL FEATURES

- Electronic temperature control with defrosting programme
- Simplified, user-friendly controls
- Operating temperature -12°C / +5°C
- Condensate evaporation tray

STANDARD SUPPLY

- Removable GN2/1 and GN1/1 tray racks

OPTIONS & ACCESSORIES


- Stainless steel plate baskets

Model	Overall dimensions (WxDxH)	Trays capacity	Plates capacity Plates Ø 230-320 Containers GN1/2	Power kW	Power supply
MR 122E	820x875x1765 h	13 x GN2/1 - 26 x GN1/1	48	0,90	AC 230V 50Hz
MR 123E	820x875x1765 h	10 x GN2/1 - 20 x GN1/1	32	0,90	AC 230V 50Hz

Model	Total input [kW]	Power supply
MR 122E	0,90	AC 230V 50Hz
MR 123E	0,90	AC 230V 50Hz

TECHNICAL INSTALLATION DIAGRAM

MR 122E

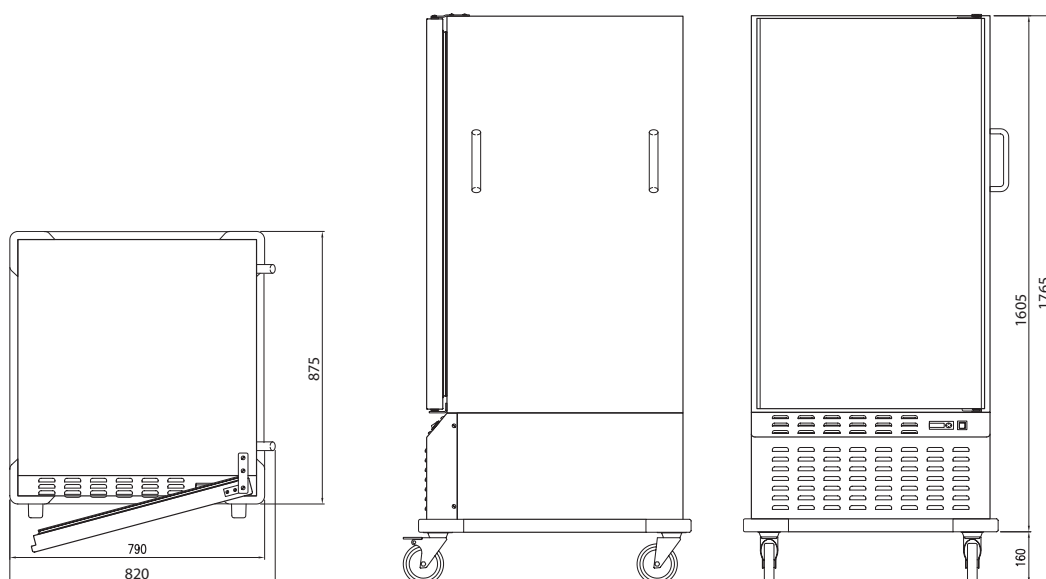

MR 123E

