

MS 048 E

Static holding trolley



CONSTRUCTION FEATURES

- Tightness chamber with radiuses corners
- Plastic bumpers
- Total thermic insulation with rock or glass wood
- Long lasting front and door seals made up of food grade of high heat resistance
- Removable side racks to facilitate cleaning
- Static heating provided by low consumption wise heating element that covers all the chamber
- Snap-shut door
- Mounted on four 125 mm diameter castors, two of which with brake
- Ergonomic handle for pushing and guiding
- Easy access to facilitate maintenance and repair

FUNCTIONAL FEATURES


- Electronic control of the temperature
- Operating temperature $30^{\circ} \pm 120^{\circ}\text{C}$
- Two adjustable humidity vents on the door
- Chamber with safety thermostat

STANDARD SUPPLY

- Two shelves with grid GN2/1

OPTIONS & ACCESSORIES


- Stainless steel plate baskets
- Additional shelves with grid GN2/1
- Guides for gastronorm containers



M O D U L I N E

food service




HOLDING SYSTEMS

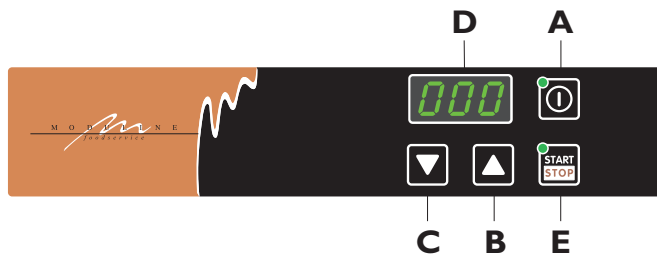

Electronic control

- A ON/OFF switch
- B Temperature increase key
- C Temperature decrease key
- D Display
- E START/STOP key

TECHNICAL INSTALLATION DIAGRAM

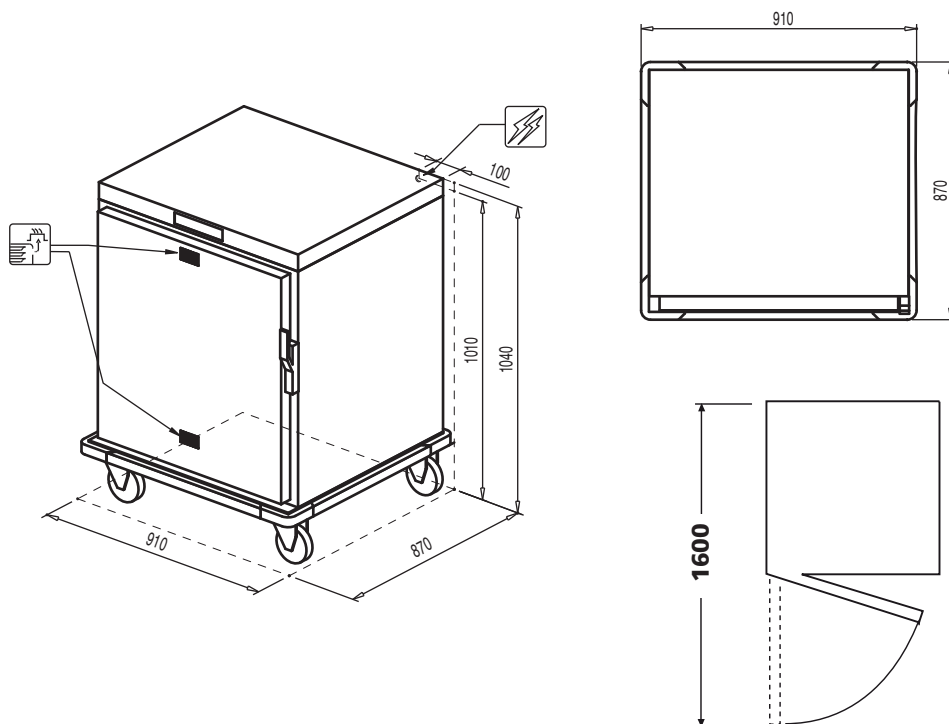

Model	Overall dimensions (W x D x H) - mm	Trays capacity	Plates capacity ø260	Plates capacity ø320	Power kW	Power supply
MS 048 E	910 x 870 x 1040 h	8 x GN 2/1 16 x GN 1/1	48	32	0,75	AC 230 V / 50 Hz