

HOLDING SYSTEMS

MS 162 E

Static holding trolley



CONSTRUCTION FEATURES

- Tightness chamber with radiuses corners
- Plastic bumpers
- Total thermic insulation with rock or glass wood
- Long lasting front and doors seals made up of food grade of high heat resistance
- Double door to reduce mostly the drop in temperature at opening
- Removable side racks to facilitate cleaning
- Static heating provided by low consumption wise heating element that covers up all the chamber
- Snap-shut doors
- Mounted on four 150 mm diameter castors, two of which with brake
- Ergonomic handle for pushing and guiding
- Easy access to facilitate maintenance and repair

FUNCTIONAL FEATURES


- Electronic control of the temperature
- Operating temperature 30°-120°C
- Two adjustable humidity vents on the door
- Chamber with safety thermostat

STANDARD SUPPLY

- Removable GN 2/1 e GN 1/1 tray racks

OPTIONS & ACCESSORIES


- No



M O D U L I N E

food service






HOLDING SYSTEMS

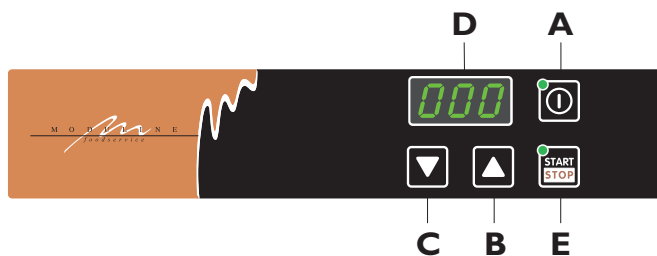

Electronic control

- A ON/OFF switch
- B Temperature increase key
- C Temperature decrease key
- D Display
- E START/STOP key

TECHNICAL INSTALLATION DIAGRAM

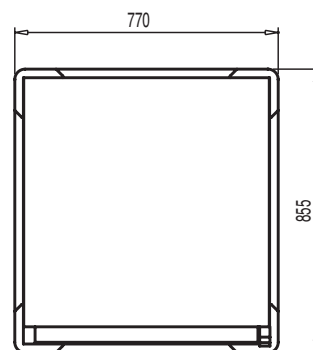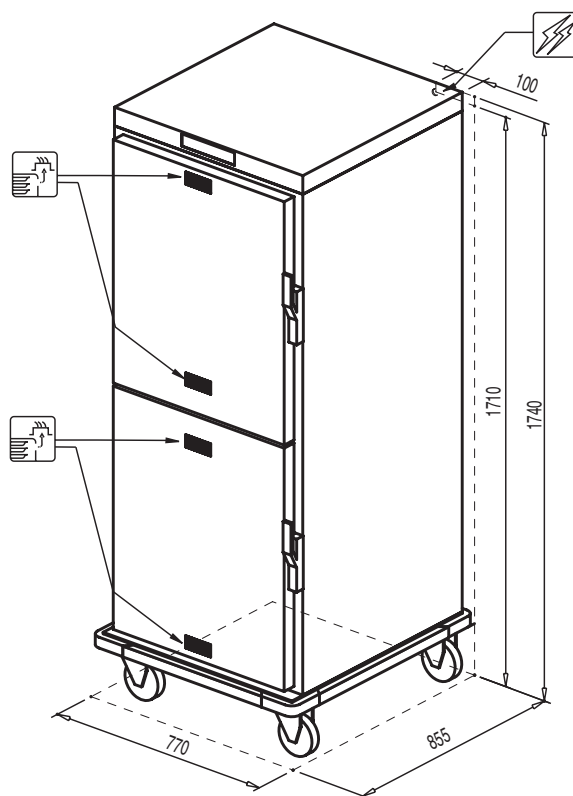

Model	Overall dimensions (W x D x H) - mm	Trays capacity	Power kW	Power supply
MS 162 E	770 x 855 x 1740 h	16xGN2/1 - 32xGN1/1	3,00	AC 230 V / 50 Hz