



M O D U L I N E

food service

REGENERATING AND HOLDING SYSTEMS



MTP 22E

**Floor holding cabinet
Transversal model**

RTP 22E

**Floor regenerating
cabinet (on dishes)
Transversal model**

FUNCTIONAL FEATURES

- Electronic control panel of temperature, time and humidity with LCD touch-screen
- End-of-cycle buzzer
- Simplified, user-friendly controls
- Automatic control of the humidity's percentage in the chamber, Climachef system
- Operating temperature 30°C ÷ 160°C
- Automatic humidity vent
- Chamber can accommodate different sized plate or tray rack transport trolleys
- Transversal chamber
- Chamber with safety thermostat
- Delayed start timer

CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Internal AISI 304 18/10 stainless steel bumpers for trolley's introduction
- Total thermic insulation with rock or glass wool
- Long lasting front seals made up of food grade of high heat resistance
- Ventilated heating provided by highefficiency protected heating elements
- Door fitted with three point locking system
- Easy access to facilitate maintenance and repair


STANDARD SUPPLY

- Climachef

OPTIONS & ACCESSORIES

- Core probe with the possibility to register 30 different temperatures and save them In the HACCP report (available only with USB port device)
- Concealed water storage tank
- USB port saving device HACCP
- GN pans cart
- Plates cart
- Cart thermal cover
- Glass door and lighting

| Model | Overall dimensions and oven interior (WxDxH) | Trays capacity | Plates capacity Plates Ø230-310 | Power kW | Power supply |
|----------------|--|--------------------|------------------------------------|--------------|-----------------|
| MTP 22E | 940x920x1950h / 570x795x1860h | 20 x GN 1/1 | 80 | 6,20 | 3N AC 400V 50Hz |
| RTP 22E | 940x920x1950h / 570x795x1860h | 20 x GN 1/1 | 80 | 12,50 | 3N AC 400V 50Hz |

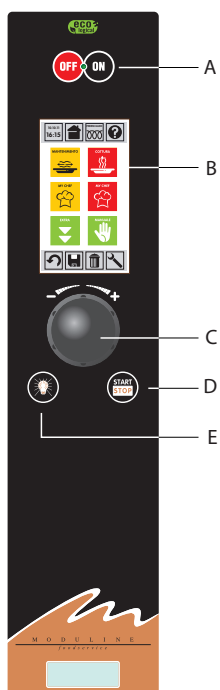



Electronic control and programmer

- A ON/OFF switch
- B Display
- C Setting knob and select "ENTER"
- D Push-button "START/STOP"
- E Push-button cooking chamber lighting

| Model | Rated voltage [Vac] | Total input [kW] | Amps. [A] | Connecting wire min. section (type H07 RN-F) [mm ²] | Water pressure [kPa] |
|----------------|---------------------|------------------|-----------|---|----------------------|
| MTP 22E | 3N - 400 | 6,2 | 9 | 5 x 1,5 | 150÷500 |
| RTP 22E | 3N - 400 | 12,5 | 18 | 5 x 1,5 | 150÷500 |

TECHNICAL INSTALLATION DIAGRAM

**MTP 22E
RTP 22E**

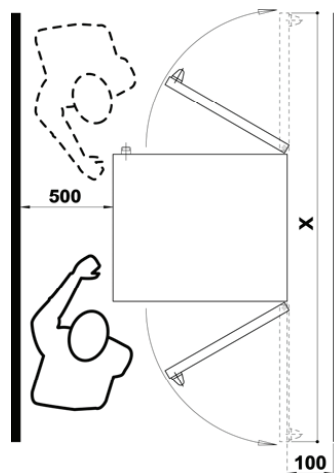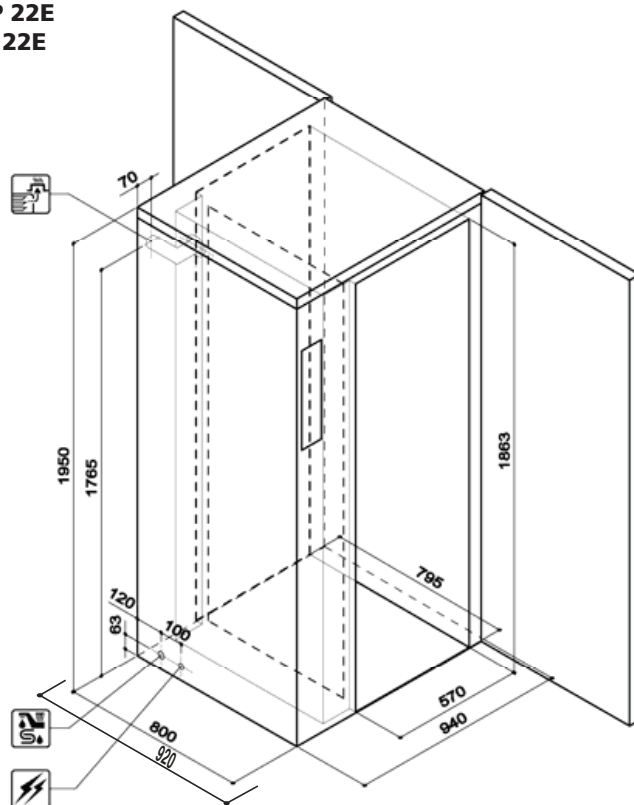

X = 2290



OPTIONAL
Removable tank