



## EasyPan | Fixed Cylindrical Pans

The EASYPAN steam pan is the extremely modular and professional solution developed by Firex to meet the needs of small restaurants and catering services to treat particularly acid products, thanks to the use of AISI 316 stainless steel.

## Modular pans for restaurants and catering services

This type of modular industrial pans, whether cylindrical or rectangular, is characterized by a high quality of materials and construction processes; all to ensure maximum safety and reliability over time. The Easypan steam cooker range is available in both direct and indirect versions, with a bottom, and gas, steam or electrically heated.

## DIRECT GAS HEATING WITH AUTOCLAVE

| MODEL       | CAPACITY<br>lt | POWER<br>kW | DIMENSIONS<br>mm   | NOTES                                    |
|-------------|----------------|-------------|--------------------|------------------------------------------|
| PMR DG 200A | 230            | 34.5        | 1175 x 1130 x 900H | Autoclave 0.05 bar                       |
| PMR DG 300A | 362            | 48          | 1305 x 1255 x 900H | Autoclave 0.05 bar                       |
| PMR DG 500A | 496            | 58          | 1305 x 1255 x 950H | Autoclave 0.05 bar                       |
| PMR DG 510A | 540            | 58          | 1555 x 1506 x 920H | Autoclave 0.05 bar 1N + PE AC 230V 50 Hz |




## Easypan can be used for

- Broths
- Rice
- Pasta
- Thick soups
- Thin soups
- Potato or vegetable purees
- Bechamel sauce
- Custards


**boiling** | **braising** | pasteurising | tilting | mixing | cooling | frying | underpressure | vacuum cooking | cutting | washing | drying

## TECHNICAL DRAWING MOD. PMR DG 200A

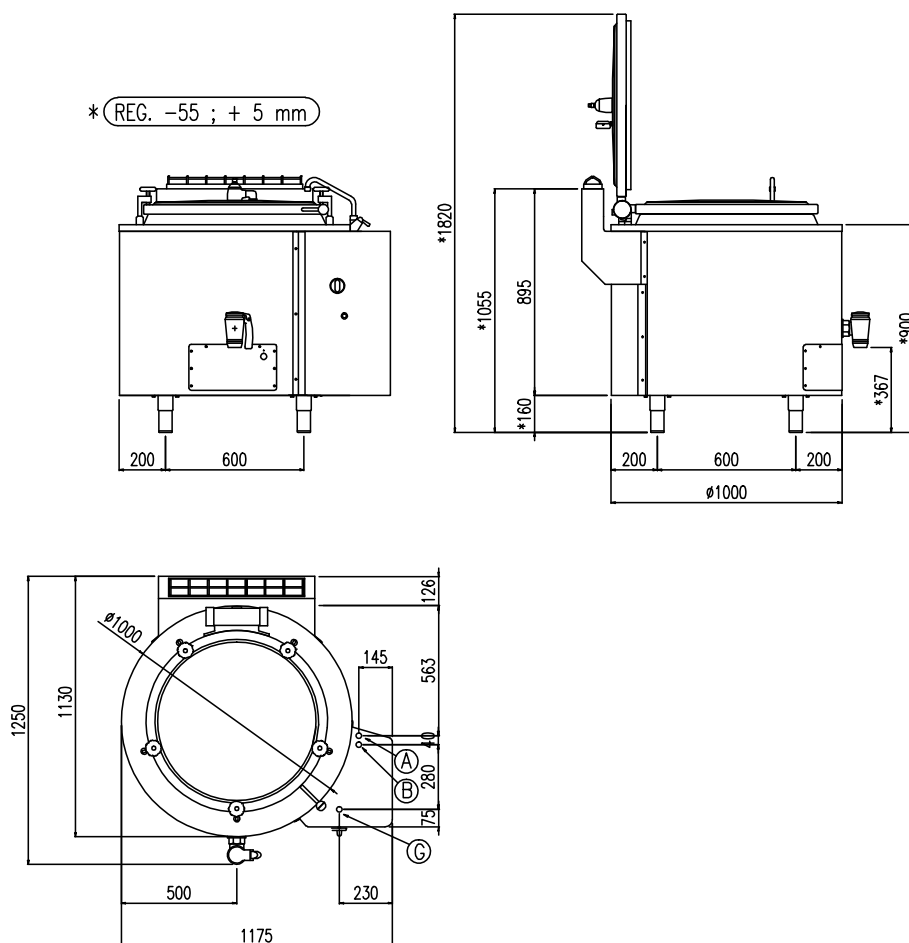


|          |                                                                         |                                                                    |             |
|----------|-------------------------------------------------------------------------|--------------------------------------------------------------------|-------------|
| <b>G</b> | <b>Attacco Gas (secondo ISO 7-1)</b><br><b>Gas Connection (ISO 7-1)</b> | <b>Gasanschluss (ISO 7-1)</b><br><b>Raccordement Gaz (ISO 7-1)</b> | <b>1/2"</b> |
| <b>A</b> | <b>Allacciamento Acqua Calda</b><br><b>Hot water inlet</b>              | <b>Warmwasseranschluss</b><br><b>Raccordement eau chaude</b>       | <b>1/2"</b> |
| <b>B</b> | <b>Allacciamento Acqua Fredda</b><br><b>Cold water inlet</b>            | <b>Katlwasseranschluss</b><br><b>Raccordement eau froide</b>       | <b>1/2"</b> |

## TECHNICAL DRAWING MOD. PMR DG 300A

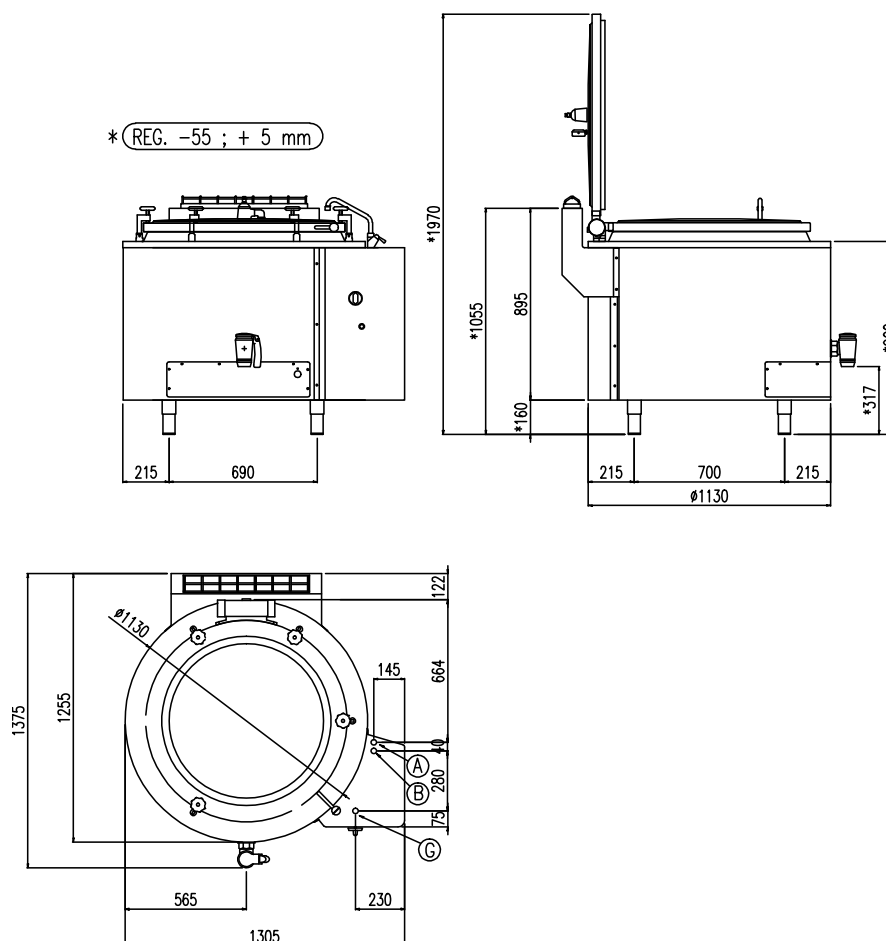


|          |                                                                         |                                                                    |             |
|----------|-------------------------------------------------------------------------|--------------------------------------------------------------------|-------------|
| <b>G</b> | <b>Attacco Gas (secondo ISO 7-1)</b><br><b>Gas Connection (ISO 7-1)</b> | <b>Gasanschluss (ISO 7-1)</b><br><b>Raccordement Gaz (ISO 7-1)</b> | <b>1/2"</b> |
| <b>A</b> | <b>Allacciamento Acqua Calda</b><br><b>Hot water inlet</b>              | <b>Warmwasseranschluss</b><br><b>Raccordement eau chaude</b>       | <b>1/2"</b> |
| <b>B</b> | <b>Allacciamento Acqua Fredda</b><br><b>Cold water inlet</b>            | <b>Katlwasseranschluss</b><br><b>Raccordement eau froide</b>       | <b>1/2"</b> |

## TECHNICAL DRAWING MOD. PMR DG 500A

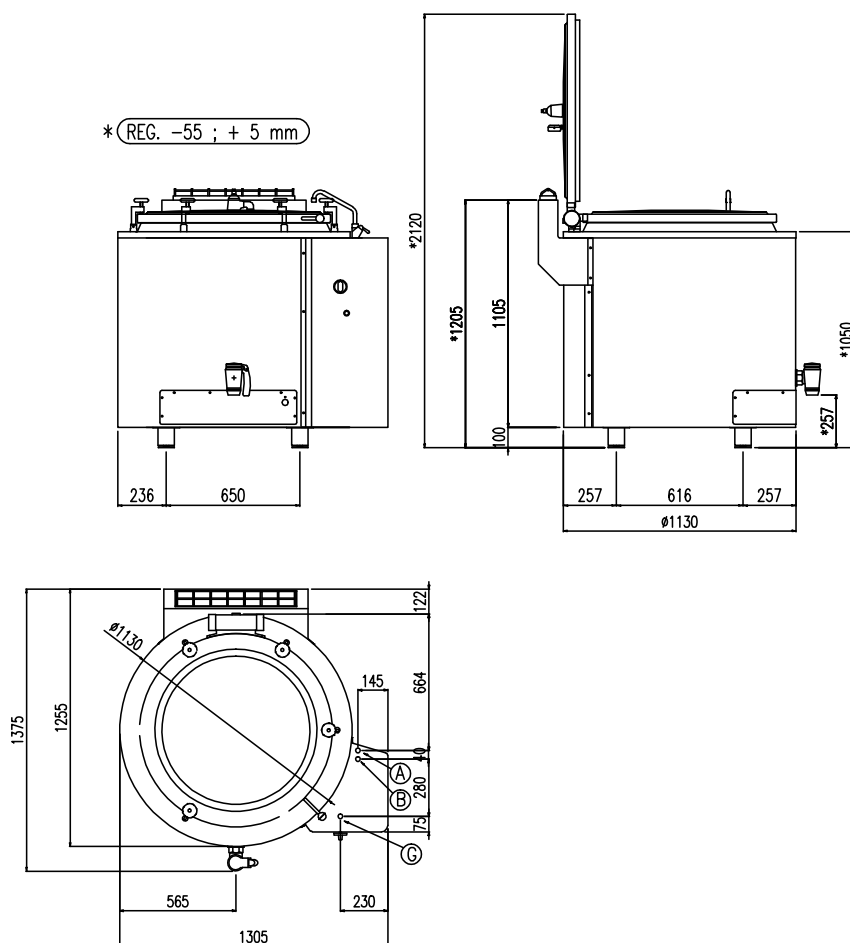

|          |                                                                         |                                                                    |             |
|----------|-------------------------------------------------------------------------|--------------------------------------------------------------------|-------------|
| <b>G</b> | <b>Attacco Gas (secondo ISO 7-1)</b><br><b>Gas Connection (ISO 7-1)</b> | <b>Gasanschluss (ISO 7-1)</b><br><b>Raccordement Gaz (ISO 7-1)</b> | <b>1/2"</b> |
| <b>A</b> | <b>Allacciamento Acqua Calda</b><br><b>Hot water inlet</b>              | <b>Warmwasseranschluss</b><br><b>Raccordement eau chaude</b>       | <b>1/2"</b> |
| <b>B</b> | <b>Allacciamento Acqua Fredda</b><br><b>Cold water inlet</b>            | <b>Katlwasseranschluss</b><br><b>Raccordement eau froide</b>       | <b>1/2"</b> |

## TECHNICAL DRAWING MOD. PMR DG 510A

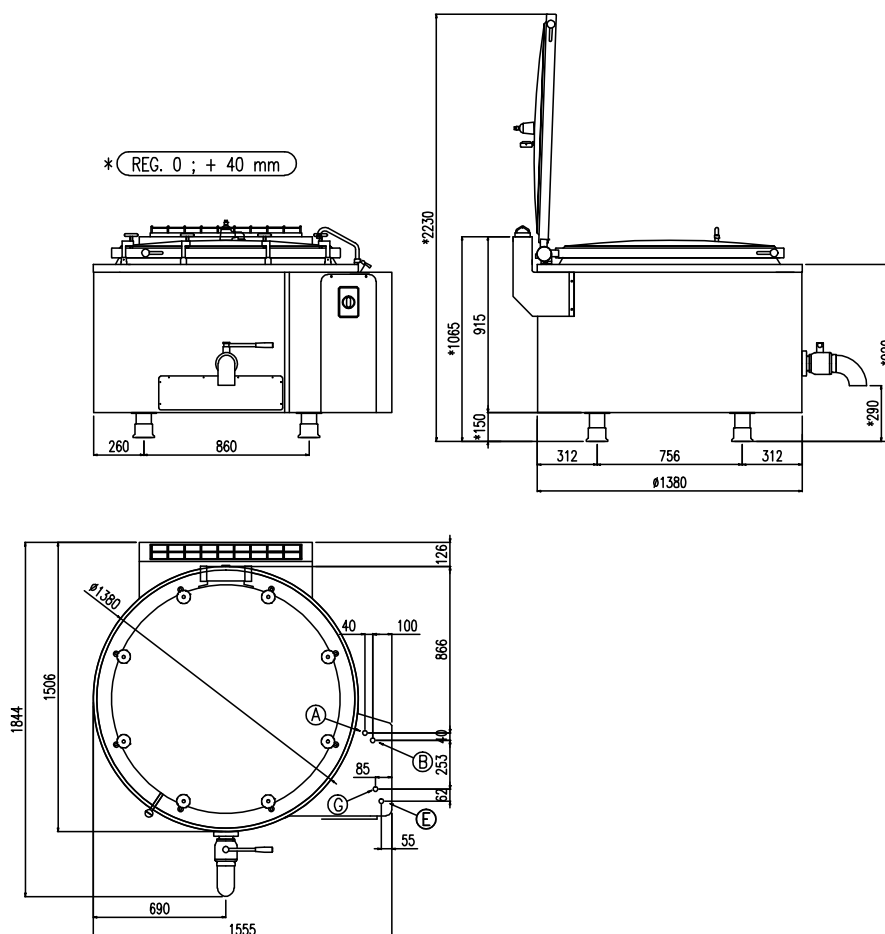

|          |                                                                         |                                                                    |                           |
|----------|-------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------|
| <b>G</b> | <b>Attacco Gas (secondo ISO 7-1)</b><br><b>Gas Connection (ISO 7-1)</b> | <b>Gasanschluss (ISO 7-1)</b><br><b>Raccordement Gaz (ISO 7-1)</b> | <b>3/4"</b>               |
| <b>E</b> | <b>Potenza assorbita</b><br><b>Electric power</b>                       | <b>Elektrische Leistung</b><br><b>Puissance électrique</b>         | <b>.20 (kW)</b>           |
| <b>E</b> | <b>Collegamento Elettrico</b><br><b>Electric connection</b>             | <b>Elektrische Verbindung</b><br><b>Connexion électrique</b>       | <b>220-240V 1N ~ 50Hz</b> |
| <b>A</b> | <b>Allacciamento Acqua Calda</b><br><b>Hot water inlet</b>              | <b>Warmwasseranschluss</b><br><b>Raccordement eau chaude</b>       | <b>1/2"</b>               |
| <b>B</b> | <b>Allacciamento Acqua Fredda</b><br><b>Cold water inlet</b>            | <b>Kaltwasseranschluss</b><br><b>Raccordement eau froide</b>       | <b>1/2"</b>               |