



EasyPan | Fixed Cylindrical Pans

The EASYPAN steam pan is the extremely modular and professional solution developed by Firex to meet the needs of small restaurants and catering services to treat particularly acid products, thanks to the use of AISI 316 stainless steel.

Modular pans for restaurants and catering services

This type of modular industrial pans, whether cylindrical or rectangular, is characterized by a high quality of materials and construction processes; all to ensure maximum safety and reliability over time. The Easypan steam cooker range is available in both direct and indirect versions, with a bottom, and gas, steam or electrically heated.

INDIRECT GAS HEATING WITH AUTOCLAVE

MODEL	CAPACITY lt	POWER kW	DIMENSIONS mm	NOTES
PMR IG 200A	220	34.5	1175 x 1130 x 900H	Autoclave 0.05 bar
PMR IG 300A	342	48	1305 x 1255 x 900H	Autoclave 0.05 bar
PMR IG 500A	480	58	1305 x 1255 x 950H	Autoclave 0.05 bar
PMR IG 510A	540	58	1555 x 1506 x 920H	Autoclave 0.05 bar

1N + PE AC 230V 50/60 Hz

1N + PE AC 230V 50 Hz




Easypan can be used for

- Broths
- Rice
- Pasta
- Thick soups
- Thin soups
- Potato or vegetable purees
- Bechamel sauce
- Custards

boiling | **braising** | pasteurising | tilting | mixing | cooling | frying | underpressure | vacuum cooking | cutting | washing | drying

TECHNICAL DRAWING MOD. PMR IG 200A

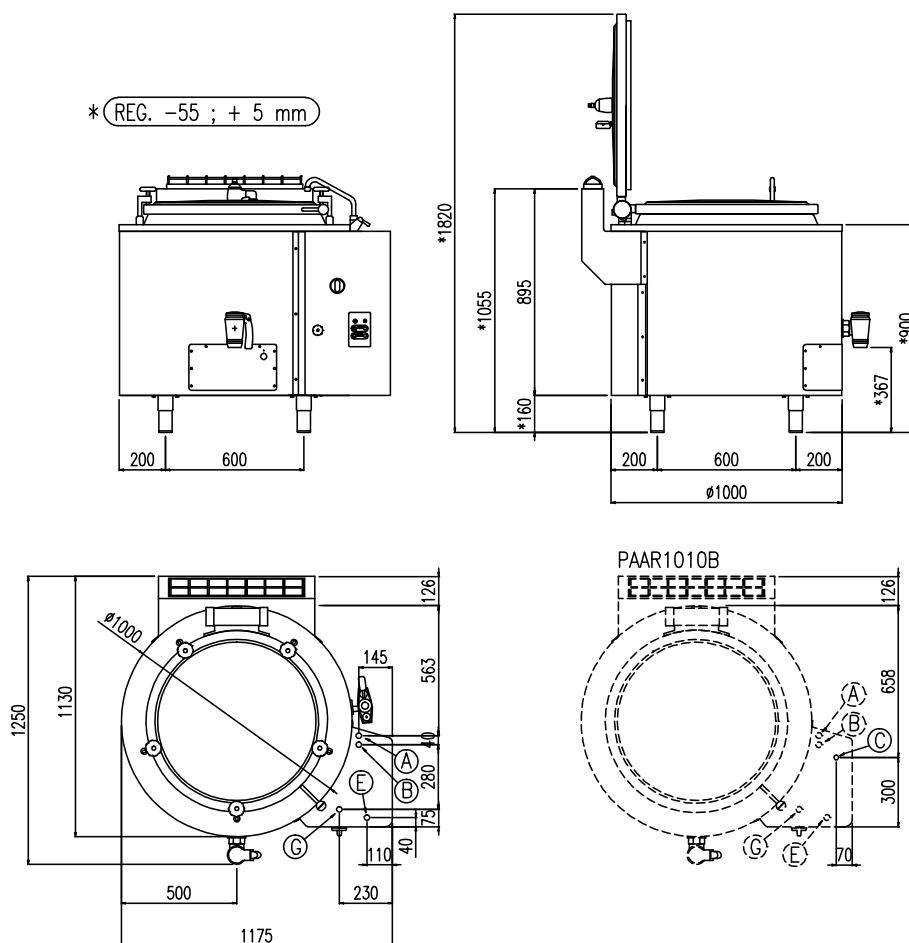


G	Attacco Gas (secondo ISO 7-1) Gas Connection (ISO 7-1)	Gasanschluss (ISO 7-1) Raccordement Gaz (ISO 7-1)	1/2"
E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	.20 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	220-240V 1N ~ 50/60Hz
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	1/2"
B	Allacciamento Acqua Fredda Cold water inlet	Katlwasseranschluss Raccordement eau froide	1/2"

Optional : PAAR1010A/B

C	Carico automatico intercapedine Autom.Jacket Water-Charge	Automatiche WasserStandsKontrolle Remplissage Automatique	1/2"
----------	--	--	-------------

TECHNICAL DRAWING MOD. PMR IG 300A

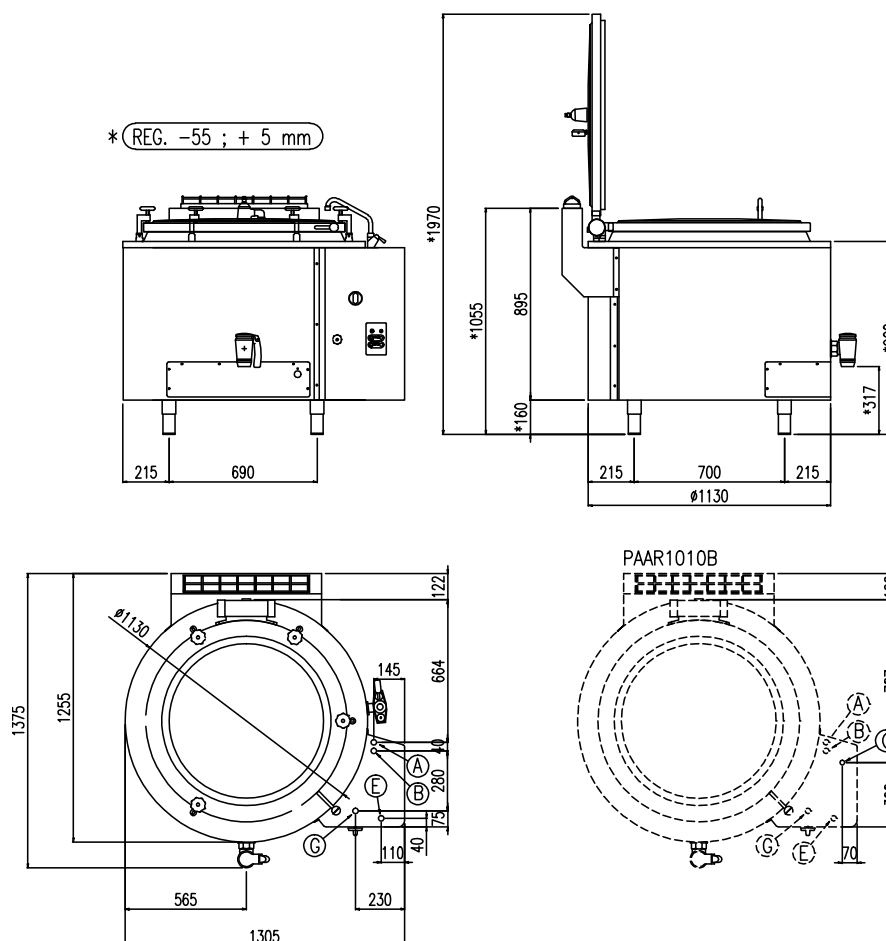


G	Attacco Gas (secondo ISO 7-1) Gas Connection (ISO 7-1)	Gasanschluss (ISO 7-1) Raccordement Gaz (ISO 7-1)	1/2"
E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	.20 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	220-240V 1N ~ 50/60Hz
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	1/2"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	1/2"

Optional : PAAR1010A/B

C	Carico automatico intercapedine Autom.Jacket Water-Charge	Automatiche WasserStandskontrolle Remplissage Automatique	1/2"
----------	--	--	-------------

TECHNICAL DRAWING MOD. PMR IG 500A

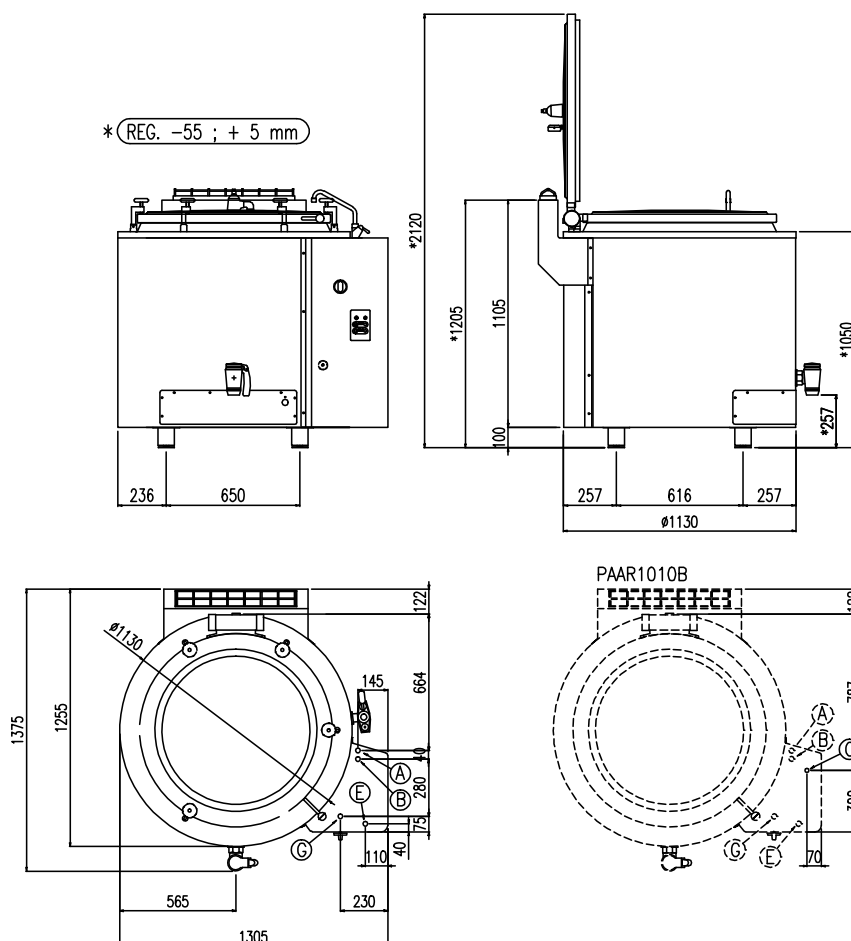


G	Attacco Gas (secondo ISO 7-1) Gas Connection (ISO 7-1)	Gasanschluss (ISO 7-1) Raccordement Gaz (ISO 7-1)	1/2"
E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	.20 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	220-240V 1N ~ 50/60Hz
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	1/2"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	1/2"

Optional : PAAR1010A/B

C	Carico automatico intercapedine Autom.Jacket Water-Charge	Automatiche WasserStandsKontrolle Remplissage Automatique	1/2"
----------	--	--	-------------

TECHNICAL DRAWING MOD. PMR IG 510A

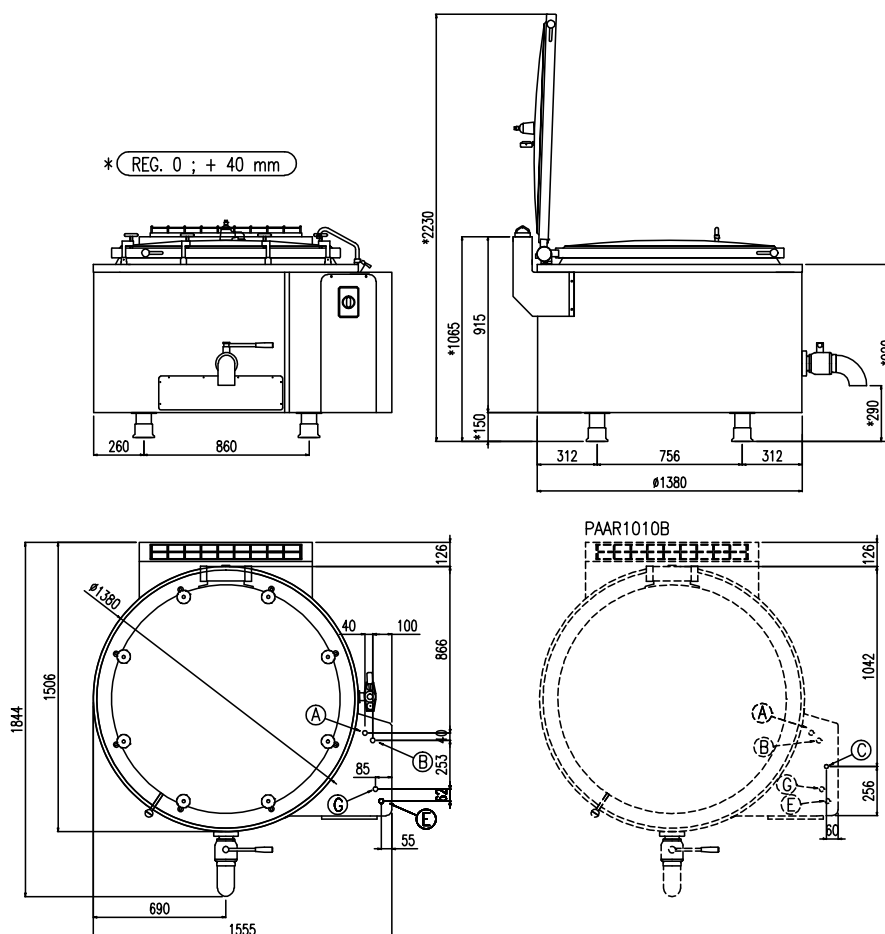

G	Attacco Gas (secondo ISO 7-1) Gas Connection (ISO 7-1)	Gasanschluss (ISO 7-1) Raccordement Gaz (ISO 7-1)	3/4"
E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	.20 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	220-240V 1N ~ 50Hz
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	1/2"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	1/2"

Optional : PAAR1010B

C	Carico automatico intercapedine Autom.Jacket Water-Charge	Automatiche WasserStandskontrolle Remplissage Automatique	1/2"
----------	--	--	-------------