



Baskett | Tilting Kettles with Mixer

The BASKETT professional pan offers full freedom in programming cooking stages and allows you to quickly transform different raw materials and foods: from mashed potatoes to pastry cream, from boiled rice to jams, as well as broths, soups and boiled meat and vegetable. This type of machine for catering is available with gas, electrical and steam heating, with or without built-in mixer.

Tilting kettles for large catering services

Flexible and simple, with double walls and built-in mixer, the Baskett line consists of highly professional tilting kettle designed for the large catering services and food production. Thanks to "Cook & Chill" these kettles become ideal tools for cooking even delicate foods.

INDIRECT ELECTRIC HEATING WITH MIXER

MODEL	CAPACITY lt	POWER kW	DIMENSIONS mm	NOTES
PR IE 105M V1	105	18.6	1355 x 1200 x 1030H	3N + PE AC 400V 50/60 Hz
PR IE 130M V1	130	24.6	1355 x 1250 x 1030H	
PR IE 180M V1	180	32.6	1455 x 1310 x 1030H	
PR IE 250M V1	242	37.5	1555 x 1390 x 1030H	
PR IE 320M V1	301	37.5	1655 x 1490 x 1030H	
PR IE 500M V1	500	38	1755 x 1650 x 1150H	




Baskett can be used for

- Thick soups
- Thin soups
- Various types of boiled foods
- Broths
- Pasta
- Rice
- Cold sauces
- Hot sauces
- Polenta
- Potato or vegetable purees
- Bechamel sauce
- Custards
- Puddings
- Jellies
- Dairy-based products

boiling | braising | pasteurising | **tilting** | **mixing** | **cooling** | frying | underpressure | vacuum cooking | cutting | washing | drying

TECHNICAL DRAWING MOD. PR IE 105M V1

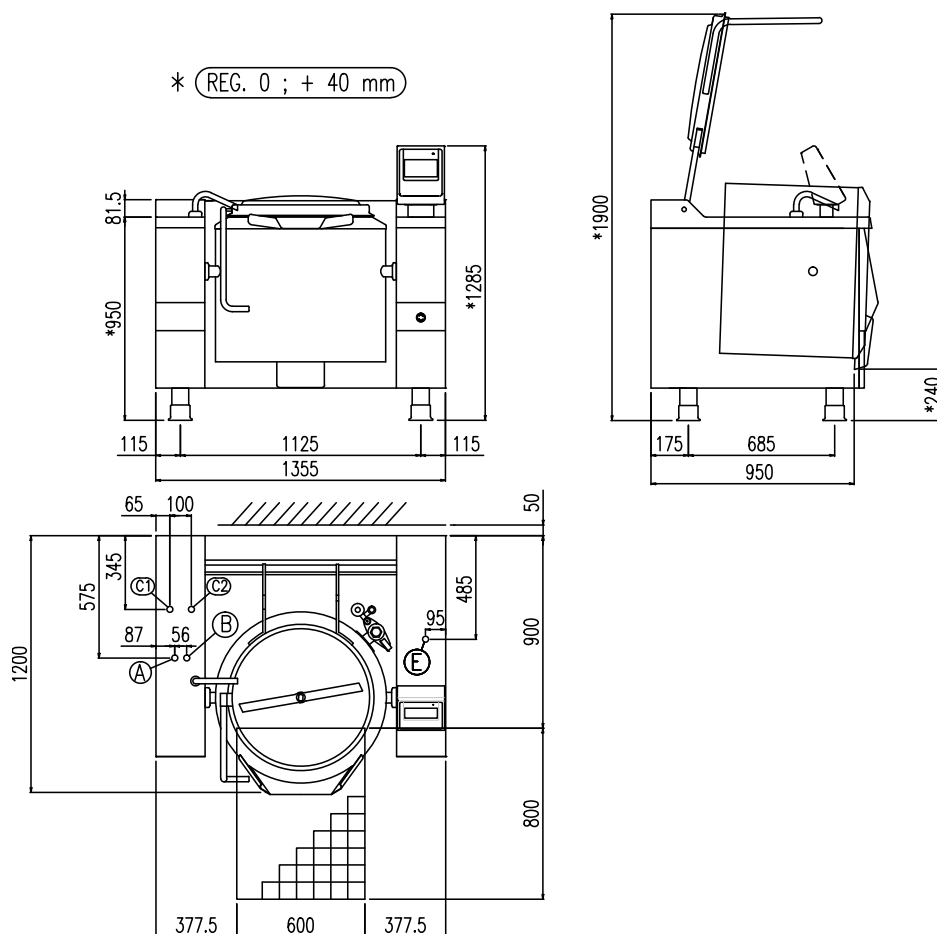


E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	18.60 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	380-415V 3N ~ 50/60Hz
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	3/4"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	3/4"

Optional : SCT2

C1	Ingresso acqua raff. Chilling water inlet	Wasserkühlung-Andrang Entree eau refoild.	3/4"
C2	Uscita acqua raff. Chilling water outlet	Wasserkühlung-Auslauf Sortie eau refoild.	3/4"

TECHNICAL DRAWING MOD. PR IE 130M V1

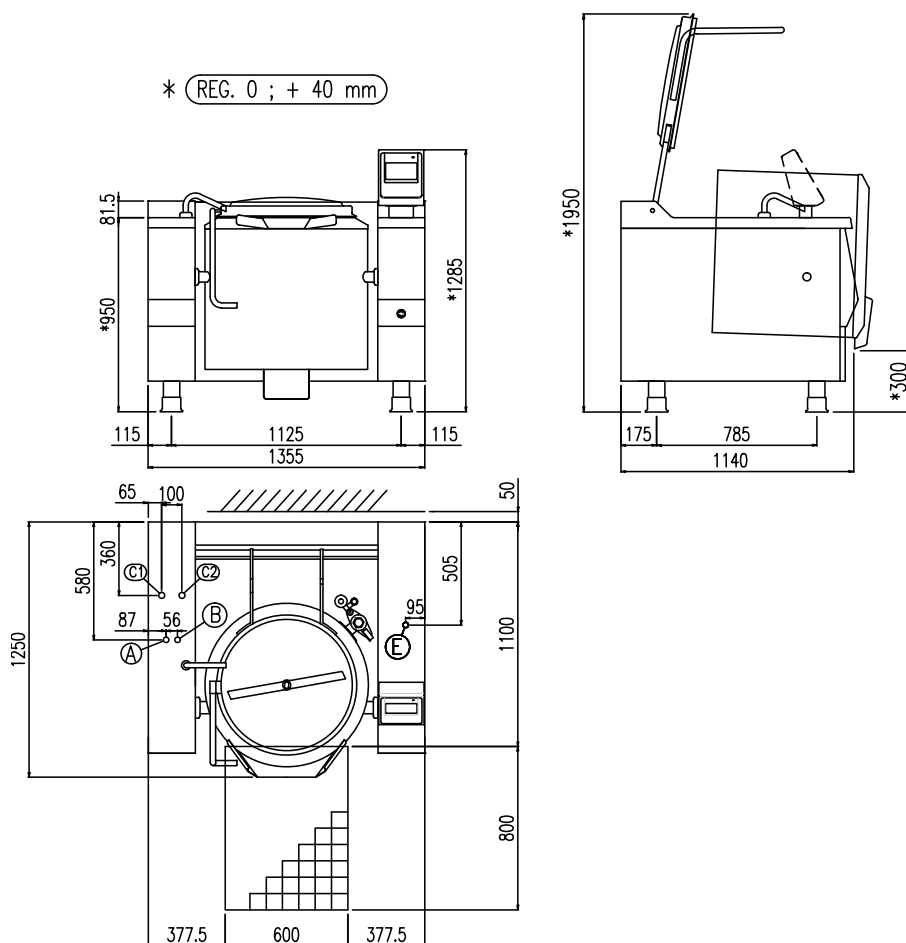


E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	24.60 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	380-415V 3N ~ 50/60Hz
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	3/4"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	3/4"

Optional : SCT2

C1	Ingresso acqua raff. Chilling water inlet	Wasserkühlung-Andrang Entree eau refoild.	3/4"
C2	Uscita acqua raff. Chilling water outlet	Wasserkühlung-Auslauf Sortie eau refoild.	3/4"

TECHNICAL DRAWING MOD. PR IE 180M V1

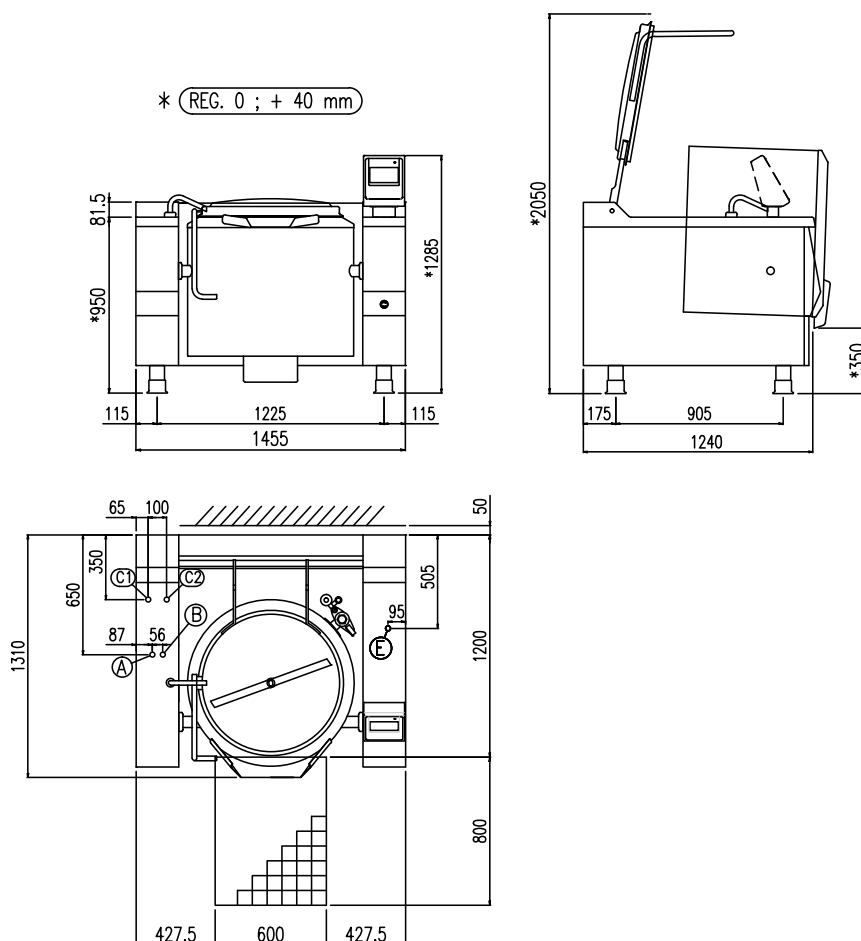


E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	32.60 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	380-415V 3N ~ 50/60Hz
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	3/4"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	3/4"

Optional : SCT2

C1	Ingresso acqua raff. Chilling water inlet	Wasserkühlung-Andrang Entree eau refoild.	3/4"
C2	Uscita acqua raff. Chilling water outlet	Wasserkühlung-Auslauf Sortie eau refoild.	3/4"

TECHNICAL DRAWING MOD. PR IE 250M V1

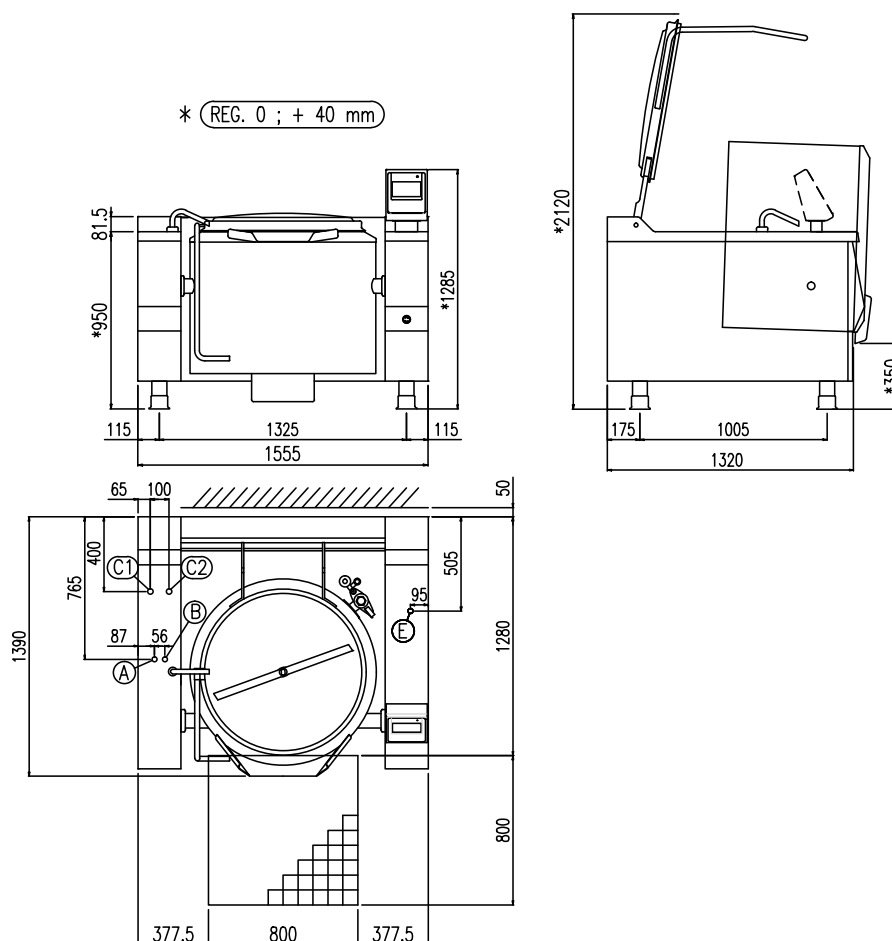


E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	37.50 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	380-415V 3N ~ 50/60Hz
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	3/4"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	3/4"

Optional : SCT2

C1	Ingresso acqua raff. Chilling water inlet	Wasserkühlung-Andrang Entree eau refoild.	3/4"
C2	Uscita acqua raff. Chilling water outlet	Wasserkühlung-Auslauf Sortie eau refoild.	3/4"

TECHNICAL DRAWING MOD. PR IE 320M V1

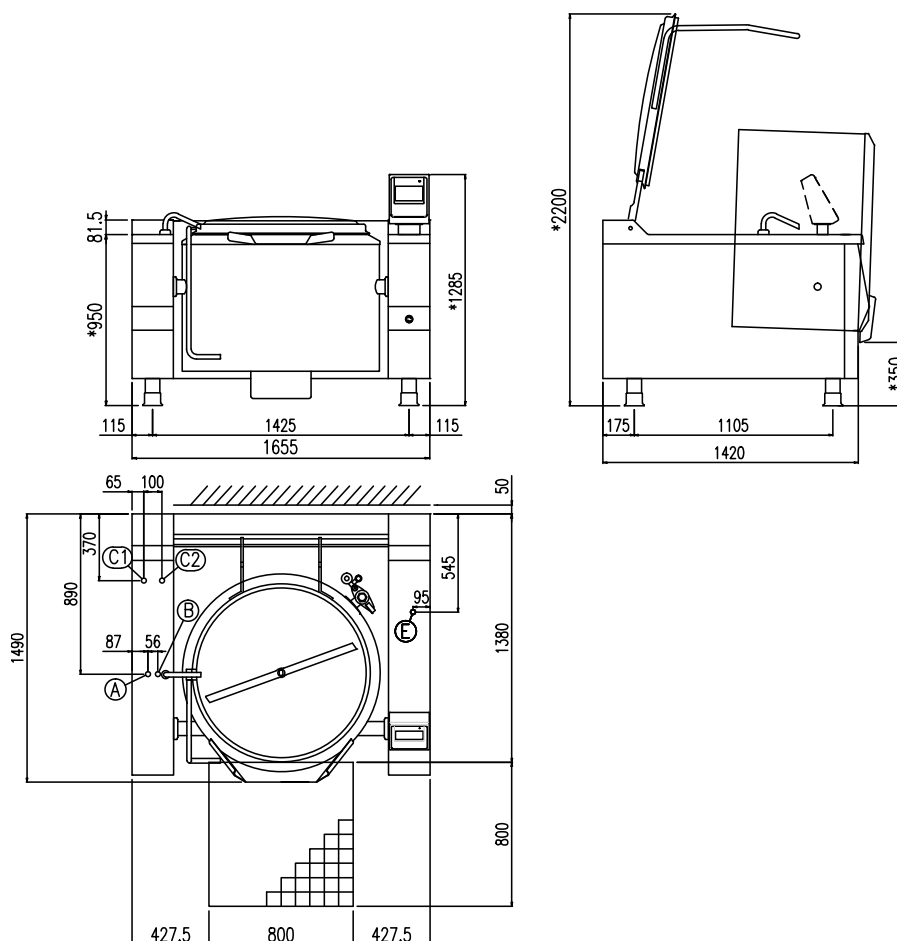


E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	37.50 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	380-415V 3N ~ 50/60Hz
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	3/4"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	3/4"

Optional : SCT2

C1	Ingresso acqua raff. Chilling water inlet	Wasserkühlung-Andrang Entree eau refoild.	3/4"
C2	Uscita acqua raff. Chilling water outlet	Wasserkühlung-Auslauf Sortie eau refoild.	3/4"

TECHNICAL DRAWING MOD. PR IE 500M V1

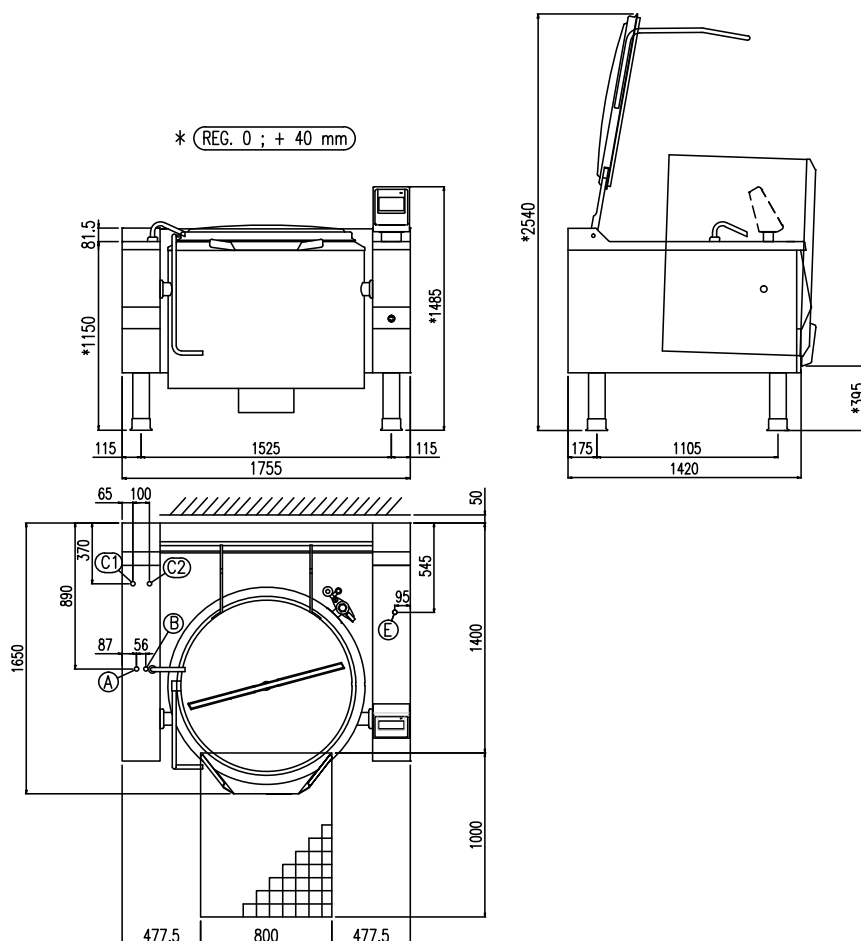

E	Potenza assorbita Electric power	Elektrische Leistung Puissance électrique	38.00 (kW)
E	Collegamento Elettrico Electric connection	Elektrische Verbindung Connexion électrique	380-415V 3N ~ 50/60Hz
A	Allacciamento Acqua Calda Hot water inlet	Warmwasseranschluss Raccordement eau chaude	3/4"
B	Allacciamento Acqua Fredda Cold water inlet	Kaltwasseranschluss Raccordement eau froide	3/4"

Optional : SCT2

C1	Ingresso acqua raff. Chilling water inlet	Wasserkühlung-Andrang Entree eau refoild.	3/4"
C2	Uscita acqua raff. Chilling water outlet	Wasserkühlung-Auslauf Sortie eau refoild.	3/4"