



MODEL Q90BR/GM81

CODE

CR1018199

## GAS BRATT PAN - MOTORISED TILTING 80 LT - IRON TANK

## **QUEEN9**

- AISI 304 stainless-steel bases and worktops, Scotch-Brite finish
- Depth of 900 mm for high power and performance
- · Catalogue offers more than 350 standard models
- Worktop, base cabinet, base cabinet with doors and oven versions
- 20/10 worktop thickness
- Twin-piece knobs prevent infiltration of dirt and have an IPX5 water ingress protection rating
- Gas kitchens having burners with various configurations and power ratings: 3.5 kW - 5.7 kW, 7 kW and 10 kW
- · Double-ring burners for 7 and 10 kW models
- · Wide range of accessories



## Technical / functional characteristics

- Water filled via solenoid valve
- · Self-balanced lid with double steel wall
- · Safety device interrupting power supply when tub is lifted
- Adjustable temperature from 100 to 280°C.
- · Stable flame burner;
- · Electric ignition
- · Thermocouple safety valve

800
900
900
3/4"
230V/1N 50 Hz
3/4"

Cold soft water connection (Ø)	
Drain (Ø)	
Gas power (Mj/hr)	73.6
Electric power (kW)	0.2
Plate dimensions (mm)	
Tank capacity (L)	80
Tank dimensions (mm)	
Internal oven dimensions (mm)	






**MODEL** 


baron

Q90BR/GM81 CODE CR1018199

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

## MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

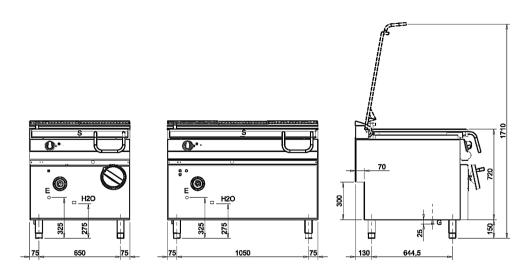

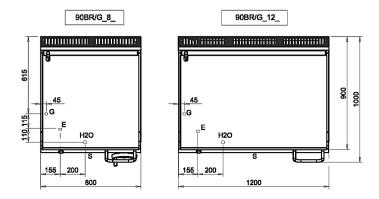

 ${\bf Legenda-Legende-Key-L\'egende-Leyenda-Legenda}$ 

- E Pressacavo entrata linea elettrica Stopfbuchse Electric cable stress relief Presse étoupe de câble él Pisacable Elektrische kabelwartel
- G Attacco arrivo gas Gasanschluss Gas connection Arrivée gaz Union de gas Gasaansluiting
- H2O Attacco arrivo acqua Wasseranschluss Water inlet Arrivée eau Union de agua Ateraansluiting EN ISO 228-1 G 3/4
- S Scarico vasca Wannenabflussrohr Pan outlet Vidange du bac Descarga cuba Water toevoer