

CODICE
BN20SM25PO35

MODELLO
R140TNNV

REFRIGERATED CABINETS

TECHNICAL SPECIFICATIONS

Rocket refrigerated cabinets designed for uniform temperatures and consistent performance. Ideal for those looking for an effective solution to maintain food freshness. The 85 mm insulation with CFC-free polyurethane is designed to maximise energy yield, reducing consumption and maintaining a constant internal temperature. Ventilated Refrigeration Technology
Uniform cold distribution ensures constant temperature maintenance


USB port for transferring recipes and HACCP records.
Up to 100 customisable recipes
Internal equipment: 6 plastic coated GN 2/1 grids + 3 intermediate grids



D

ENERGY CLASS

SERIE ROCKET

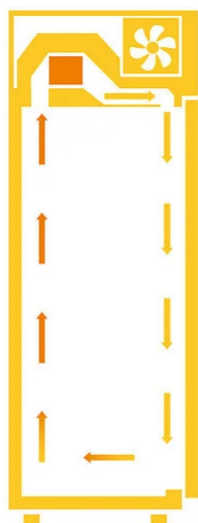

CODICE
 BN20SM25PO35

MODELLO
 RI40TNNV

REFRIGERATED CABINETS

Technical Information

SPECIFICATION	DATA
MATERIAL	BN20SM25PO35
DIM. WIDTH	1400 mm
DIM. PRODUCTIVITY	830 mm
DIM. HEIGHT	2080 mm
GAS/REFRIGERANT TYPE	R290
ENERGY CLASS	D
CLIMA CLASS	5
CELL SIZE	1250X710X1480
Capacity	1085 l.
INSULATION THICKNESS	83 mm
TEMPERATURE RANGE	-2 / +8°C
NUMBER OF PANS	48
GRILL PITCH	55 mm
DEPTH WITH OPEN DOOR	1472 mm
DOOR OPEN DIMENSION	535x1480 mm
USEFUL INTERNAL DEPTH	685 mm
MAX STORAGE T.	60 °C
MIN STORAGE T.	-40 °C
MIN. OPERATING PRESSURE	0,2 bar
MAX. OPERATING PRESSURE	30




CODICE

BN20SM25PO35

MODELLO

R140TNNV

REFRIGERATED CABINETS

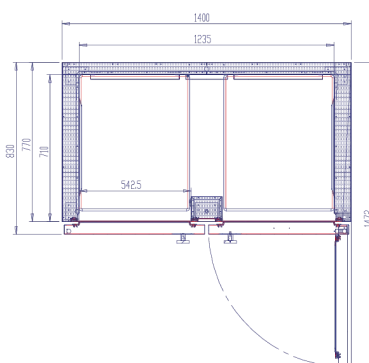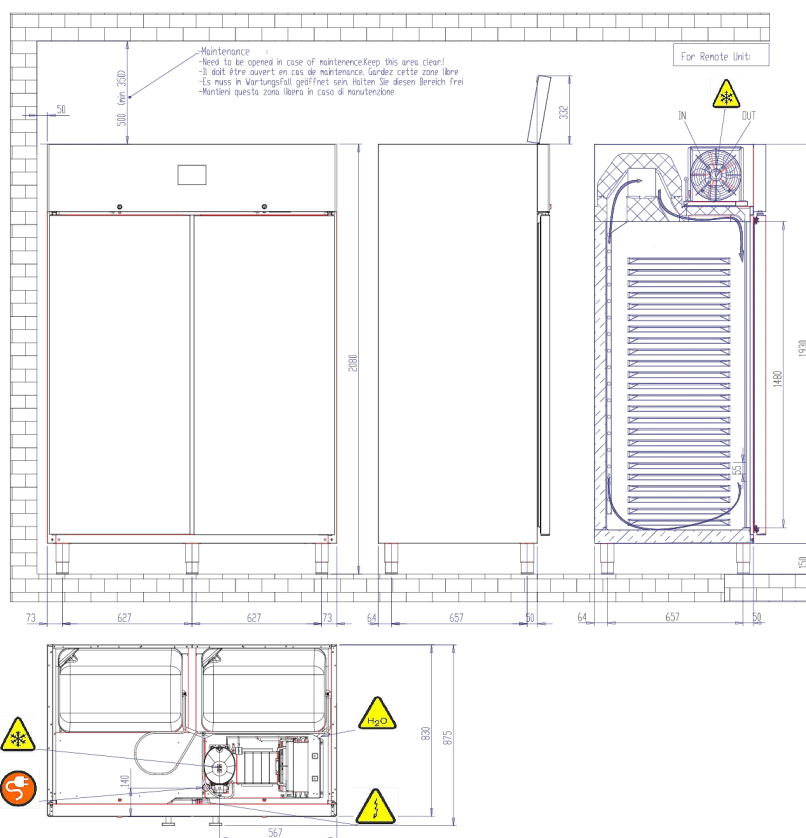


GASTRONOM 2/1
Refrinators/ Kuhlchränke/ Armadi refrigerati/
Armoires réfrigérées/ Armarios refrigerados/Koelkasten/

CODICE
BN20SM25PO35

MODELLO
R140TNNV

REFRIGERATED CABINETS

Product's PLUS




State-of-the-art refrigeration circuit, designed with an integrated front curtain that ensures even and effective distribution of cold inside the cold room. This advanced technology creates a homogeneous flow of air that envelops every corner of the refrigerated on open cabinet, maintaining constant temperatures and ensuring optimal product preservation, while minimising heat loss.




The refrigeration system with a monoblock outside the cell frees up internal space, optimising storage capacity and ensuring efficient use of every available inch.



Thanks to the R290 gas supplied as standard for all available versions, Olis guarantees care and sustainability in all aspects of its product development.



Grid rails molded on the sides, ensuring easy cleanability.



Thanks to an innovative and user-friendly control system, temperature and operating parameters are easy to monitor and adjust.

CODICE
BN20SM25PO35

MODELLO
RI40TNNV

REFRIGERATED CABINETS

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
1405011065	MASTER BAC GN1/1 H60 MM	CONTAINER 325X530X60 MM
1405011150	MASTER BAC GN1/1 H150 MM	CONTAINER 325X530X150 MM
14051200	MASTER BAC 60X40 H70 MM	CONTAINER 400X600X70 MM
1440065530	GR PLAST GN2/1	PLASTIC COATED GRID 530X650 MM GN2/1
1231190	GUIDA CENTR. M 140	RIGHT/LEFT GUIDE FOR CENTRAL Grids
BN1440165530	GR INOX GN2/1	STAINLESS GRID 530X650 MM GN2/1
219914	RT	WHEEL KIT DIAM. 100, H127MM
KIT-IOT 4.0	KIT-IOT 4.0	CONNECTIVITY 4.0 SUPREME SUPPLEMENT KIT