

**CODICE**  
BN20SM01PO35

**MODELLO**  
R70TNN

REFRIGERATED CABINETS



## TECHNICAL SPECIFICATIONS


Rocket refrigerated cabinets designed for uniform temperatures and consistent performance. Ideal for those looking for an effective solution to maintain food freshness. The 85 mm insulation with CFC-free polyurethane is designed to maximise energy yield, reducing consumption and maintaining a constant internal temperature. Ventilated Refrigeration Technology. Uniform cold distribution ensures constant temperature maintenance.

USB port for transferring recipes and HACCP records.  
Up to 100 customisable recipes  
Internal set-up: 3 plastic coated GN2/1 grids

**A**

ENERGY CLASS

## SERIE ROCKET

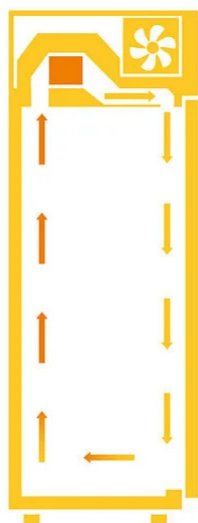

**CODICE**  
BN20SM01PO35

**MODELLO**  
R70TNN

REFRIGERATED CABINETS


## Technical Information

| SPECIFICATION           | DATA                |
|-------------------------|---------------------|
| MATERIAL                | BN20SM01PO35        |
| DIM. WIDTH              | 700 mm              |
| DIM. PRODUCTIVITY       | 830 mm              |
| DIM. HEIGHT             | 2080 mm             |
| NET WEIGHT              | 117 Kg              |
| PACKAGE LENGTH          | 890 mm              |
| PACKAGE WIDTH           | 740 mm              |
| PACKAGING HEIGHT        | 2200 mm             |
| PACKAGE VOLUME          | 1,45 m <sup>3</sup> |
| GROSS PACKING WEIGHT    | 130 Kg              |
| GAS/REFRIGERANT TYPE    | R290                |
| ENERGY CLASS            | A                   |
| CLIMA CLASS             | 5                   |
| CELL SIZE               | 535X710X1480        |
| Capacity                | 562 l.              |
| INSULATION THICKNESS    | 83 mm               |
| GWP                     | 3                   |
| TEMPERATURE RANGE       | -2 / +8°C           |
| KW/24H                  | 0.95                |
| NUMBER OF PANS          | 24                  |
| GRILL PITCH             | 55 mm               |
| DEPTH WITH OPEN DOOR    | 1472 mm             |
| DOOR OPEN DIMENSION     | 535x1480 mm         |
| USEFUL INTERNAL DEPTH   | 685 mm              |
| MAX STORAGE T.          | 60 °C               |
| MIN STORAGE T.          | -40 °C              |
| MIN. OPERATING PRESSURE | 0,2 bar             |
| MAX. OPERATING PRESSURE | 30                  |

**CODICE**  
**BN20SM01PO35**

**MODELLO**  
**R70TNN**

**REFRIGERATED CABINETS**

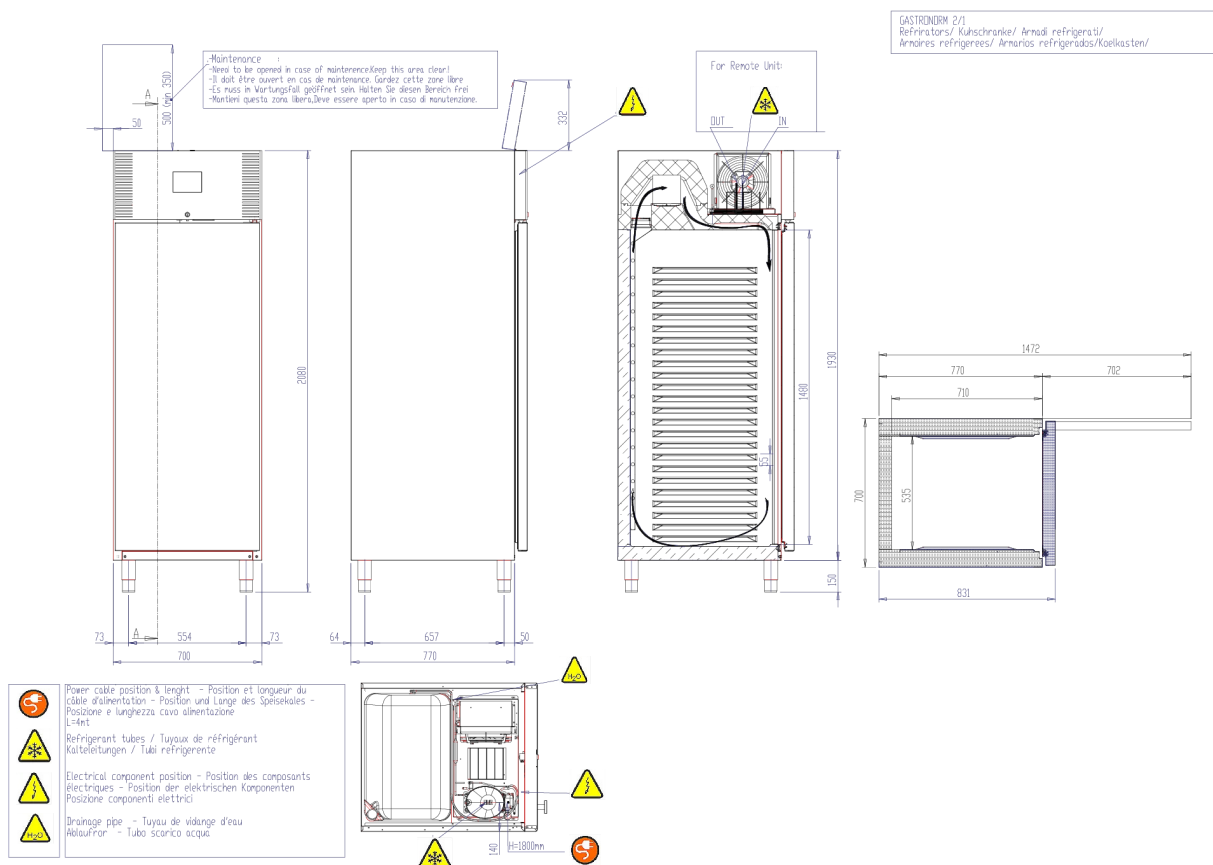

**CODICE**


**BN20SM01PO35**

**MODELLO**

**R70TNN**

**REFRIGERATED CABINETS**

# Product's PLUS




State-of-the-art refrigeration circuit, designed with an integrated front curtain that ensures even and effective distribution of cold inside the cold room. This advanced technology creates a homogeneous flow of air that envelops every corner of the refrigerated on open cabinet, maintaining constant temperatures and ensuring optimal product preservation, while minimising heat loss.




The refrigeration system with a monoblock outside the cell frees up internal space, optimising storage capacity and ensuring efficient use of every available inch.



Thanks to the R290 gas supplied as standard for all available versions, Olis guarantees care and sustainability in all aspects of its product development.



Grid rails molded on the sides, ensuring easy cleanability.



Thanks to an innovative and user-friendly control system, temperature and operating parameters are easy to monitor and adjust.

**CODICE**  
**BN20SM01PO35**

**MODELLO**  
**R70TNN**

**REFRIGERATED CABINETS**

## ACCESSORIES

| CODE         | MODELLO                  | DESCRIZIONE                             |
|--------------|--------------------------|---|
| 1405011065   | MASTER BAC GN1/1 H60 MM  | CONTAINER 325X530X60 MM                 |
| 1405011150   | MASTER BAC GN1/1 H150 MM | CONTAINER 325X530X150 MM                |
| 14051200     | MASTER BAC 60X40 H70 MM  | CONTAINER 400X600X70 MM                 |
| 1440065530   | GR PLAST GN2/1           | PLASTIC COATED GRID 530X650 MM GN2/1    |
| 1231190      | GUIDA CENTR. M 140       | RIGHT/LEFT GUIDE FOR CENTRAL Grids      |
| BN1440165530 | GR INOX GN2/1            | STAINLESS GRID 530X650 MM GN2/1         |
| 219914       | RT                       | WHEEL KIT DIAM. 100, H127MM             |
| KIT-IOT 4.0  | KIT-IOT 4.0              | CONNECTIVITY 4.0 SUPREME SUPPLEMENT KIT |