



# M O D U L I N E

## food service

### REGENERATING AND HOLDING SYSTEMS



## RC 061 M/E

### Regenerating and holding ventilated trolley

#### FUNCTIONAL FEATURES

- Control panel of temperature, time and humidity electromechanical (M) or electronic with LCD touch-screen (E)
- Simplified, user-friendly controls
- Operating temperature  $30^{\circ}\text{C} \div 160^{\circ}\text{C}$
- Manual humidity vent
- Periodic reversal of direction of rotation of the fans for better air distribution
- Concealed water storage tank
- End-of-cycle buzzer
- Chamber with safety thermostat
- Delayed start timer only for E version

#### STANDARD SUPPLY

- Removable GN1/1 or 600x400 tray racks


#### OPTIONS & ACCESSORIES

- Core probe for E version with the possibility to register 30 different temperatures and save them in the HACCP report (available only with USB port device)
- Automatic humidity vent (Climachef) only for E version
- Stainless steel plate baskets
- USB port saving device HACCP only for E version

#### CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Plastic bumpers
- Total thermic insulation with rock or glass wool
- Long lasting front seals made up of food grade of high heat resistance
- Removable side racks to facilitate cleaning
- Internal drain for easy cleaning
- Ventilated heating provided by high efficiency protected heating elements
- Snap-shut door
- Mounted on four 125mm diameter castors, two of which with brake
- Ergonomic handles for pushing and guiding
- Easy access to facilitate maintenance and repair


Model	Overall dimensions (W x D x H) - mm	Trays capacity	Plates capacity Plates ø 230-260	Power kW	Power supply
<b>RC 061 M/E</b>	880 x 785 x 970 h	6 x GN1/1 or 600x400	12	3,20	AC 230 V 50 Hz

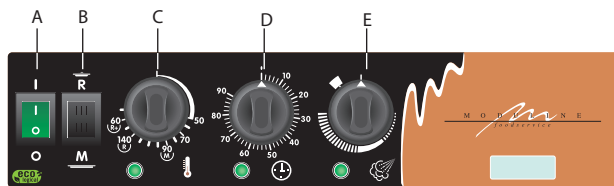

### Version M - With electromechanical control

- A** ON/OFF switch
- B** Mode selection switch for regenerating "R" on plate or keeping warm "M" on plate or tray
- C** Temperature regulation knob, with warning light to show that temperature has been reached
- D** Regenerating time regulation knob, with warning light indicating operation. By selecting "keeping warm" "M" the "time" function is cut out
- E** Humidity regulation knob, with warning light indicating operation

M

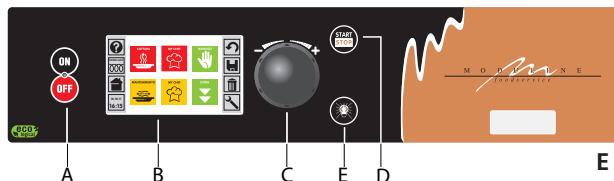

### Version E - Electronic control and programmer

- A** ON/OFF switch
- B** Display
- C** Setting knob and select "ENTER"
- D** Push-button "START/STOP"
- E** Push-button cooking chamber lighting

E

Model	Rated voltage [Vac]	Total input [kW]	Amps. [A]	Connecting wire min. section (type H07 RN-F) [mm²]
<b>RC 061M/E</b>	3N - 400	3,2	4,6	5 x 1,5

## TECHNICAL INSTALLATION DIAGRAM

### RC 061 M/E

