



# MODULINE

*foodfinish & foodserve technologies*

## REGENERATING AND HOLDING SYSTEMS



### RRT112M/E

Regenerating and holding  
ventilated trolley

#### CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Rubber bumpers
- Total thermic insulation with rock or glass wool
- Long lasting front seals made up of food grade of high heat resistance
- Removable side racks to facilitate cleaning
- Internal drain for easy cleaning
- Ventilated heating provided by highefficiency protected heating elements
- Snap-shut door
- Mounted on four 125mm diameter castors, two of wich with brake
- Ergonomic handles for pushing and guiding
- Easy access to facilitate maintenance and repair

#### FUNCTIONAL FEATURES

- Control panel of temperature, time and humidity electromechanical (M) or electronic with LCD touch-screen (E)
- Simplified, user-friendly controls
- Operating temperature 30°C ÷ 160°C
- Manual humidity vent
- Periodic reversal of direction of rotation of the fans for better air distribution
- Concealed water storage tank
- End-of-cycle buzzer
- Chamber with safety thermostat
- Delayed start timer only for E version


#### STANDARD SUPPLY

- Removable GN2/1 or GN1/1 tray racks

#### OPTIONS & ACCESSORIES

- Core probe for E version with the possibility to register 30 different temperatures and save them In the HACCP report (available only with USB port device)
- Automatic humidity vent (Climachef) only for E version
- Stainless steel plate baskets
- USB port saving device HACCP only for E version

Model	Overall dimensions (W x D x H) - mm	Trays capacity	Plates capacity Plates ø 230-260	Power kW	Power supply
<b>RRT112M/E</b>	990 x 825 x 1130 h	10 x GN 2/1 20 x GN 1/1	40	6,5	3N AC 400 V / 50 Hz

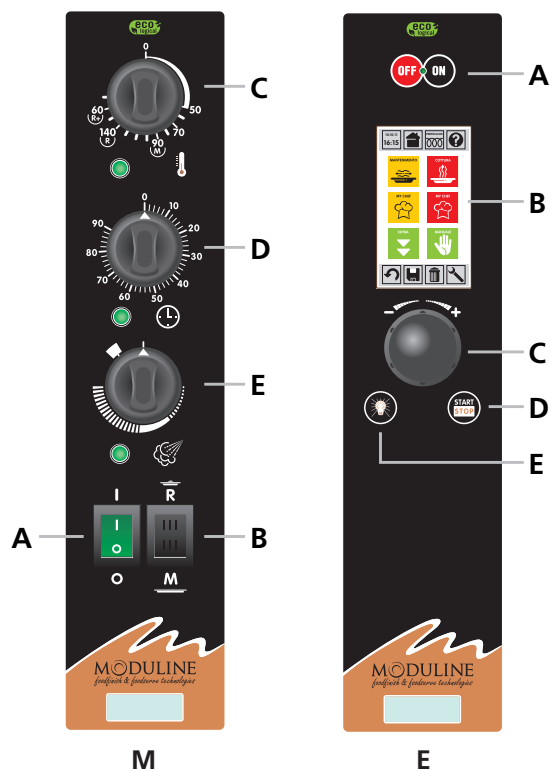

### Version M - With electromechanical control




- A** ON/OFF switch
- B** Mode selection switch for regenerating "R" on plate or keeping warm "M" on plate or tray
- C** Temperature regulation knob, with warning light to show that temperature has been reached
- D** Regenerating time regulation knob, with warning light indicating operation. By selecting "keeping warm" "M" the "time" function is cut out
- E** Humidity regulation knob, with warning light indicating operation

### Version E - Electronic control and programmer

- A** ON/OFF switch
- B** Display
- C** Setting knob and select "ENTER"
- D** Push-button "START/STOP"
- E** Push-button cooking chamber lighting

Model	Rated voltage [Vac]	Total input [kW]	Amps. [A]	Connecting wire min. section (type H07 RN-F) [mm <sup>2</sup> ]
<b>RRT112M/E</b>	3N - 400	6,5	9,4	5 x 1,5

## TECHNICAL INSTALLATION DIAGRAM

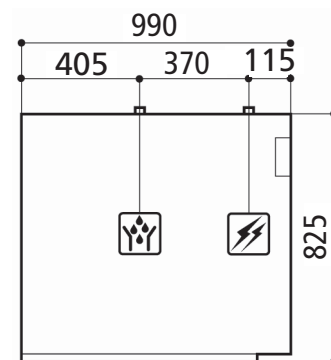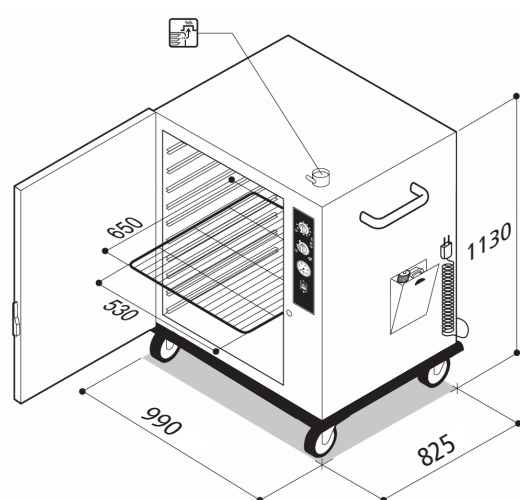

- Electricity supply cable inlet
- Adjustable vent for release of excess humidity
- Chamber drain