

REFRIGERATED CABINET SLIM 1 DOOR - TEMP. 0/+10 °C

Model: S50TN




Technical/functional Characteristics

- Cabinets entirely constructed in S/S AISI 304.
- 75mm insulation with CFC and HCFC-free polyurethane.
- Refrigerants R134A R404A.
- The front panel can be tilted to make routine maintenance operations easier (cleaning the condenser).
- Cabinet interior with rounded corners for easier cleaning.
- Standard equipped with 3 shelves and 3 pair of grid supports.
- 15-cm height-adjustable feet.
- Automatic defrost and hot gas condensate evaporation.
- Doors with self-closing hinges.
- Lock fitted as standard.
- Suitable to be placed on a plinth.
- Ventilated refrigeration system (The evaporator is painted and equipped with a protection casing).
- Electronic control board membrane.

TECHNICAL DATA

DIMENSIONS	
WIDTH (MM)	600
DEPTH (MM)	700
HEIGHT (MM)	2080
CAPACITY	388 LT
DIMENSIONE CELLA (MM)	450x580x1480
TEMPERATURA DI LAVORO	0/+10

ELECTRIC CONNECTION (V/~/HZ)	220
COLD WATER CONNECTION (Ø)	-
DRAIN (Ø)	-
POTENZA FRIGORIFERO	200
ELECTRIC POWER (KW)	200
CAPACITA' ABBATTIMENTO +90/+3 °C (KG)	-
CAPACITA' CONGELAMENTO +90/-18 °C (KG)	-

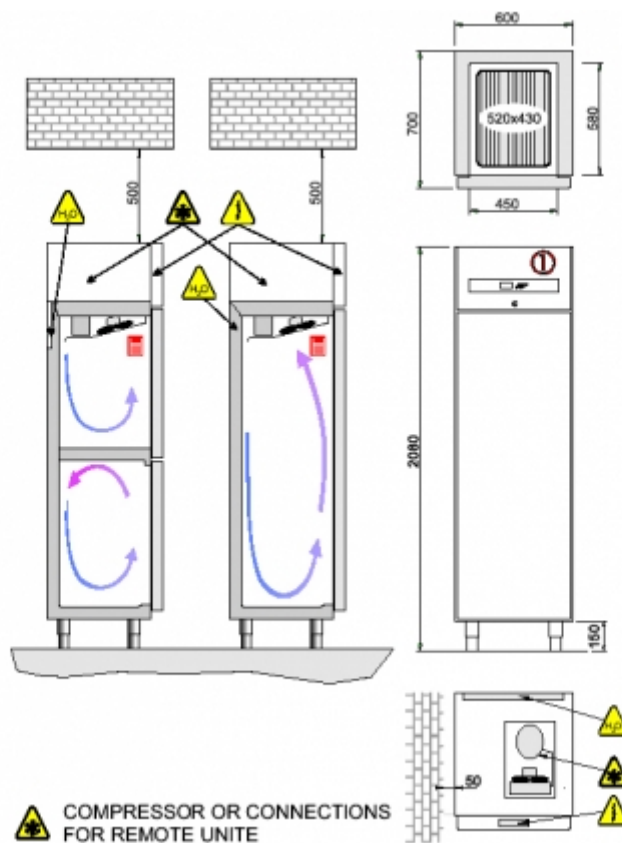

ACCESSORIES

KIT WHEELS
PLINTH FOR REFRIGERATED CABINET 1 DOOR
COUPLE OF SLIDES FOR GRIDS
RILSAN GRID DIM. 520 X 430
S/S GRID DIM. 520 X 430