

**CODICE**

BN27WG50221PO76

**MODELLO**

W25-03 BT H710 S

REFRIGERATED TABLES

## TECHNICAL SPECIFICATIONS

Cell bottom printed with rounded corners and removable grid supports for the maximum degree of hygiene and load flexibility. Insulation thickness of 60 mm, made of high-density expanded polyurethane, completely free of CFC. Fully extractable drawers, thanks to special Fullterer telescopic guides in stainless steel. Self-closing door with 100° opening lock. Lower hinge fixed frontally for installation on the plinth.

Removable condensing unit.

### REFRIGERATION UNIT

Out-of-cell evaporator for greater loading convenience

Ducted ventilation system to even out internal temperature

Evaporators with treatment in cataphoresis

### CONTROLS, MONITORING, AND SAFETY FEATURES:

Electronic control board with HACCP function

Hot gas defrost system (onboard motor versions)

Electric defrost (on predisposed versions)

Automatic condensate evaporation device without the need for any electricity

Interior equipment: grid support frame and 3 plastic-coated GNI/I grids




**D**

ENERGY CLASS

## SERIE WINDY

The temperature uniformity throughout the refrigerated compartment is secured by a patented ventilation system using air channelling, aided by the absence of the evaporator in the compartment.

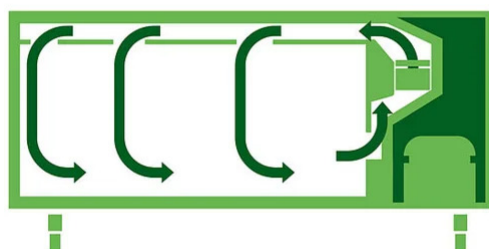

**CODICE**

BN27WG50221PO76

**MODELLO**

W25-03 BT H710 S

REFRIGERATED TABLES


**Technical Information**

SPECIFICATION	DATA
MATERIAL	BN27WG50221PO76
DIM. WIDTH	1730 mm
DIM. PRODUCTIVITY	690 mm
DIM. HEIGHT	860 mm
NET WEIGHT	105 Kg
PACKAGE LENGTH	750 mm
PACKAGE WIDTH	1780 mm
PACKAGING HEIGHT	970 mm
PACKAGE VOLUME	1.29495 m <sup>3</sup>
GROSS PACKING WEIGHT	122 Kg
GAS/REFRIGERANT TYPE	R290
ENERGY CLASS	D
CLIMA CLASS	5
Capacity	279 l.
INSULATION THICKNESS	60 mm
GWP	3
TEMPERATURE RANGE	-20 / -15°C
COMPRESSOR DISPLACEMENT	18.7 cm <sup>3</sup>
GAS QUANTITY	81 g.
NOISE LEVEL	dB(A) < 70
EVAPORATOR	INTERNO IN CELLA
IEE	60.8
KW/24H	6.6
NUMBER OF PANS	3
GRILL PITCH	120 mm
DEPTH WITH OPEN DOOR	1080 mm
DOOR OPEN DIMENSION	1080*570 mm
USEFUL INTERNAL DEPTH	550 mm
FLOOR HEIGHT	150 mm
COMPARTMENTS	3
DOORS	3
POWER SUPPLY	220-240 V ~ 50 Hz
POWER CABLE	mm <sup>2</sup> - 3G 1,5
DEFROST HEATER	130
MAX STORAGE T.	60 °C
MIN STORAGE T.	-40 °C
MIN. OPERATING PRESSURE	0.2 bar
MAX. OPERATING PRESSURE	30

**CODICE**  
BN27WG50221PO76

**MODELLO**  
W25-03 BT H710 S

**REFRIGERATED TABLES**

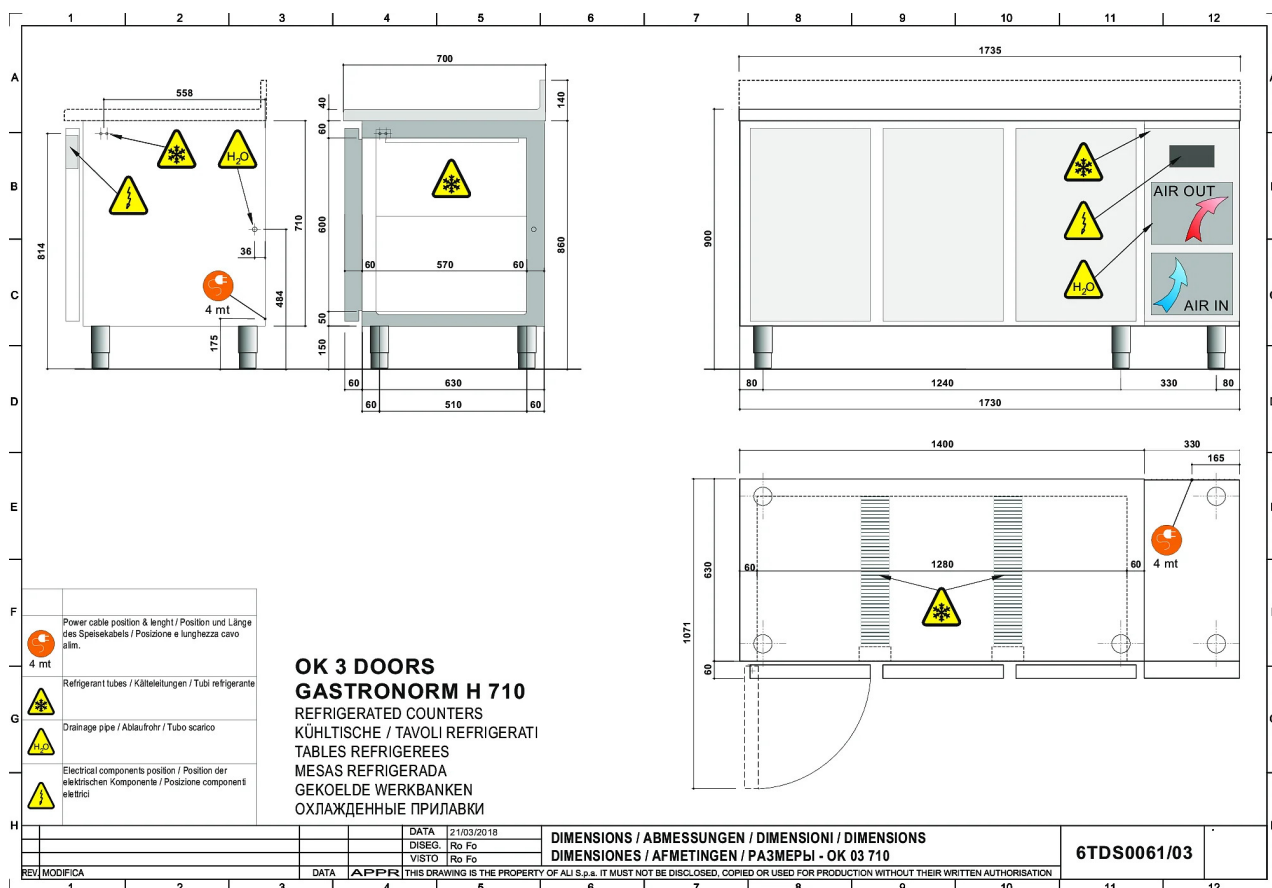

**CODICE**

**BN27WG50221PO76**

**MODELLO**

**W25-03 BT H710 S**

**REFRIGERATED TABLES**

# Product's PLUS



Flush rack structure, with 5 positions, easily removable for cleaning.



Molded cell bottom with rounded edges and removable grid supports for maximum hygiene and loading flexibility.



Thanks to an innovative and user-friendly control system, temperature and operating parameters are easy to monitor and adjust.




Full extension drawers with special Fulterer stainless steel telescopic slides



The CFC-free, water-expanding polyurethane foam insulation of the tables has a thickness of 60 mm, enabling the tables to work optimally even at ambient temperatures of +40 °C.



The temperature uniformity throughout the refrigerated compartment is secured by a patented ventilation system using air channelling, aided by the absence of the evaporator in the compartment.



**CODICE**





BN27WG50221PO76

**MODELLO**

W25-03 BT H710 S

REFRIGERATED TABLES

**OPTIONAL**

	MODELLO	DESCRIZIONE
	<b>CR13</b>	Drawers kit 1/3 H (int)= 120 mm (int)= 120 mm (int) 170 mm
	<b>CR21</b>	Drawers 1/2 H (int)= 240 mm (int)= 240 mm
	<b>KIT-IOT 4.0</b>	CONNECTIVITY 4.0 SUPREME SUPPLEMENT KIT
	<b>OPCBAS</b>	

**CODICE****BN27WG50221PO76****MODELLO****W25-03 BT H710 S****REFRIGERATED TABLES****ACCESSORIES**

CODE	MODELLO	DESCRIZIONE
1290020	P40 1735	Top for 3 compartments 1735x 700 mm Thickness 40 mm
1290060	PA40 1735	Top with backguard for 3 compartments 1735x 700 mm Thickness 40 mm + 100 mm
21657278	UMC TNN	TNN REMOTE UNIT SETUP
219916	RT	Kit castors S18-03 H 158mm / ø 125
219921	RT	Kit castors H 158mm / ø 125