


Wok

- Outer casing and feet made of AISI 304 steel.
- Available with burners of 10 kW or 14 kW.
- Flue to vent heat.
- Worktops with thickness 2 mm with 950x720 mm.
- Right rear drain with a 22 mm diameter, configured for earth connection.
- Available in two versions, open base or with doors: for the 60 module, 2 M30 doors; for the 100 module, 2 M50 doors.
- Full-width drip pan located in the storage area.

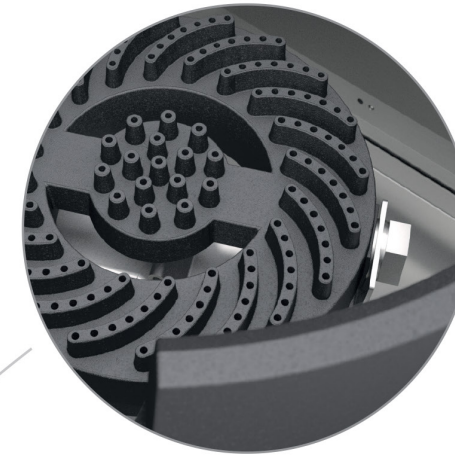

10 or 14 kW enamelled castiron ring burner, removable to facilitate cleaning.

Hob with recess as standard and liquid drain in rear righthand corner.



Full-width drip pan located in the storage area.

