

REFRIGERATED COUNTER BT 3 COMPARTEMENTS - 3 DOORS - WITHOUT TOP - COOLING UNIT ON BOARD

CODICE

BN27KO50221PO76

MODELLO

S25-03 BT H710 S

PRODUCT

REFRIGERATED TABLES

TECHNICAL SPECIFICATIONS

ideal for any type of professional kitchen

The Supreme refrigerated tables, available in two height variants (660 or 710), are fully made of stainless steel and characterised by complete extraction doors or drawers, rounded corners and removable grid supports that allow total cleaning and a possible load flexibility. Ideal for any type of professional kitchen, they are distinguished by the ventilated refrigeration system equipped with fully removable filter and, in particular, for the free evaporation system in chamber that allows an improved air circulation.

BODY DEPTH = 690 mm HEIGHT = 710

Evaporating unit placed on the side of each compartment

Easy access to electric and electronic components


Automatic defrosting device and condensed water dissipation via hot gas

Moulded cell base with rounded corners and removable rack supports for easy-cleaning and loading flexibility

Ventilated cooling system (evaporator entirely coated and contained in a casing)

Fully removable filter

Interior equipment: grid support frame and 3 plastic-coated GNI/I grids

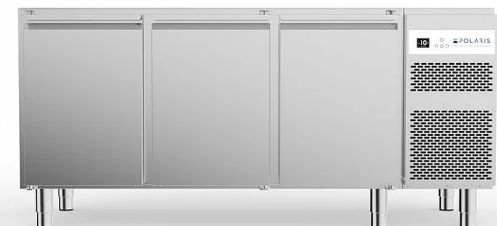


D

ENERGY CLASS

SERIE SUPREME

Evaporators placed behind each door pillar to ensure uniformity in cold distribution.

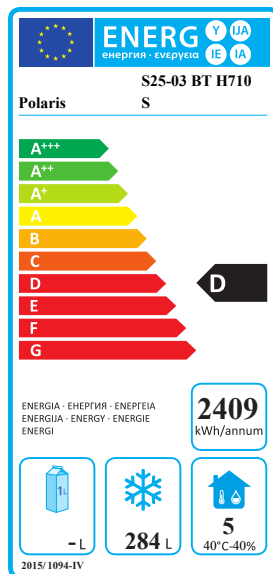

REFRIGERATED COUNTER BT 3 COMPARTEMENTS - 3 DOORS - WITHOUT TOP - COOLING UNIT ON BOARD

CODICE
 BN27KO50221PO76
Technical Information

MODELLO
 S25-03 BT H710 S

PRODUCT
 REFRIGERATED TABLES


SPECIFICATION	DATA
MATERIAL	BN27KO50221PO76
DIM. WIDTH	1730 mm
DIM. DEPTH	690 mm
DIM. HEIGHT	860 mm
NET WEIGHT	105 Kg
PACKAGE LENGTH	1780 mm
PACKAGE WIDTH	750 mm
PACKAGING HEIGHT	1110 mm
PACKAGE VOLUME	1,482 m ³
GROSS PACKING WEIGHT	125 Kg
STANDARD POWER SUPPLY	220-240 V ~ 50 Hz
TOTAL ABSORPTION	2.9
TENSION	220-240 V ~ 50 Hz
REFRIGERATION POWER	-30/45 °C - 279 W
REFRIGERANT POWER	1379 W
GAS/REFRIGERANT TYPE	R290
GAS QUANTITY	81 g.
ENERGY CLASS	D
CLIMA CLASS	5
CAPACITIES	279 l.
INSULATION THICKNESS	60 mm
GWP	3
TEMPERATURE RANGE	-20 / -15°C
COMPRESSOR DISPLACEMENT	18.7 cm ³
NOISE LEVEL	db(A) < 70
EVAPORATOR	INTERNO IN CELLA
IEE	60,08
KW/24H	6,60
NUMBER OF PANS	3
GRILL PITCH	120 mm
DEPTH WITH OPEN DOOR	1080 mm
DOOR OPEN DIMENSION	1080*570 mm
USEFUL INTERNAL DEPTH	550 mm
FLOOR HEIGHT	150 mm
COMPARTMENTS	3
DOORS	3
POWER SUPPLY	220-240 V ~ 50 Hz
POWER CABLE	mm ² - 3G 1,5
DEFROST HEATER	130
MAX STORAGE T.	60 °C
MIN STORAGE T.	-40 °C
MIN. OPERATING PRESSURE	0.2 bar
MAX. OPERATING PRESSURE	30

**REFRIGERATED COUNTER BT 3
COMPARTEMENTS - 3 DOORS - WITHOUT
TOP - COOLING UNIT ON BOARD**

CODICE
BN27KO50221PO76

MODELLO
S25-03 BT H710 S

PRODUCT
REFRIGERATED TABLES

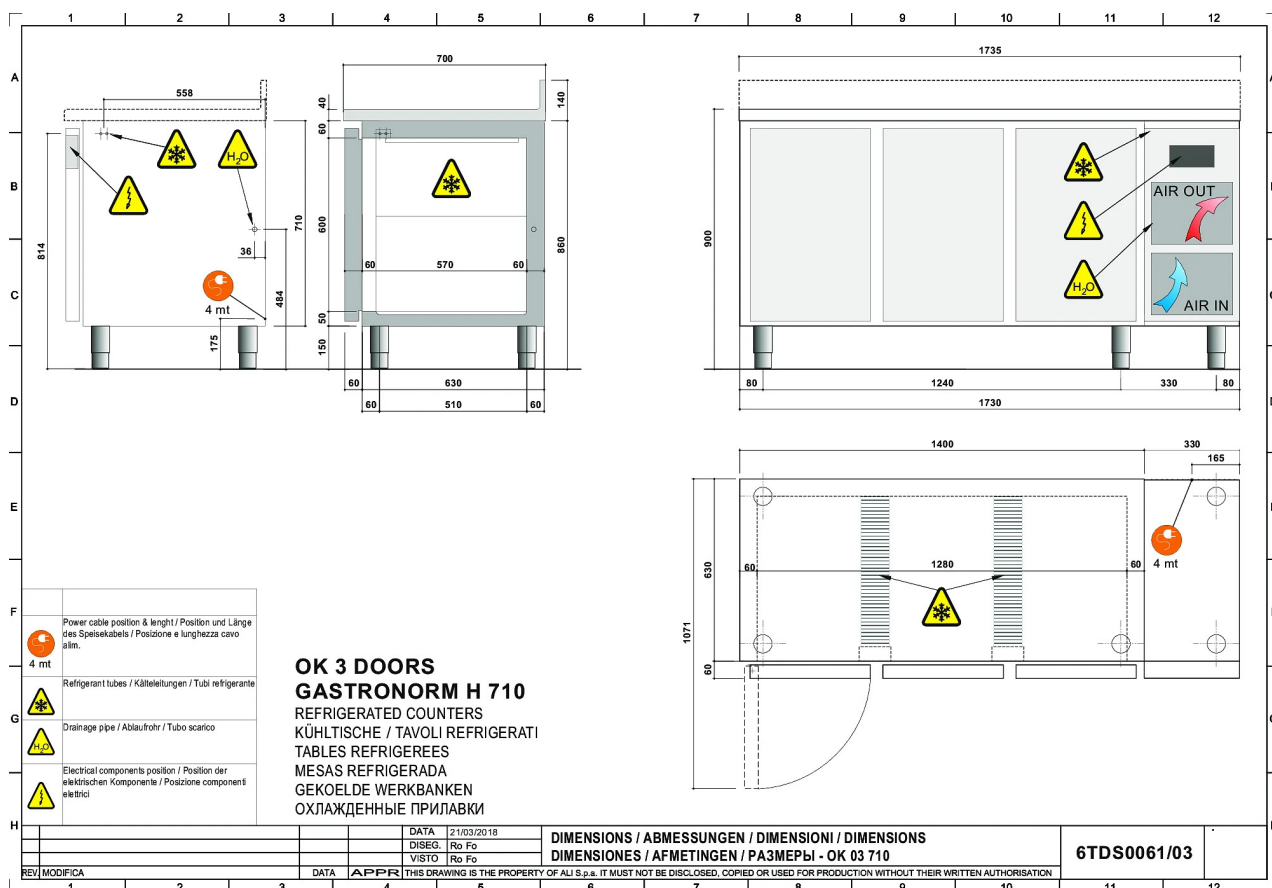

REFRIGERATED COUNTER BT 3 COMPARTEMENTS - 3 DOORS - WITHOUT TOP - COOLING UNIT ON BOARD

CODICE

BN27KO50221PO76

MODELLO

S25-03 BT H710 S

PRODUCT

REFRIGERATED TABLES

Product's PLUS

Evaporators placed behind each door pillar to ensure uniformity in cold distribution.



Molded cell bottom with rounded edges and removable grid supports for maximum hygiene and loading flexibility.



Thanks to an innovative and user-friendly control system, temperature and operating parameters are easy to monitor and adjust.




Full extension drawers with special Fulterer stainless steel telescopic slides



The CFC-free, water-expanding polyurethane foam insulation of the tables has a thickness of 60 mm, enabling the tables to work optimally even at ambient temperatures of +40 °C.



Flush rack structure, with 5 positions, easily removable for cleaning.



The multifunctional USB port, supplied as standard, enables fast and secure management of operations, supporting firmware updates, import and export of parameters, recipes and languages. It also provides efficient downloading of HACCP data (including temperatures, alarms and events), ensuring traceability and full regulatory compliance.

**REFRIGERATED COUNTER BT 3
COMPARTEMENTS - 3 DOORS - WITHOUT
TOP - COOLING UNIT ON BOARD**

CODICE

BN27KO50221PO76

OPTIONAL

MODELLO

S25-03 BT H710 S

PRODUCT

REFRIGERATED TABLES

	MODELLO	DESCRIZIONE
	CR13	Drawers kit 1/3 H (int)= 120 mm (int)= 120 mm (int) 170 mm
	CR21	Drawers 1/2 H (int)= 240 mm (int)= 240 mm
	VANO MOTORE SX	L/H Condensing unit
	OPCBAS	Version with control panel Simple electronics
	60HZ	EXTRA COST +5% FOR 60 HZ VOLTAGE POWER SUPPLY

**REFRIGERATED COUNTER BT 3
COMPARTEMENTS - 3 DOORS - WITHOUT
TOP - COOLING UNIT ON BOARD**

CODICE

BN27KO50221PO76

MODELLO

S25-03 BT H710 S

PRODUCT

REFRIGERATED TABLES

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
BN219922	RT 6	6 wheel kit H 158mm / ø 125mm
BN2199900	A-CCM	ACCESSORY DRAWER CLOSING SPRING KIT