ICEMATIC

CHERRY

C38

38 kg/ 24h

Spray Ice Makers / Spray Ice Makers:
C28 - C38 - C46 - C54 - C70 - C90

C38 ALL GAS PUMP
220-240/50/1
Spray Ice Makers

RAINBOW TECHNOLOGY | PROGRAMMED OZONE CYCLE | SCHEDULED PRODUCTION | TOUCH CONTROL | SAFE ICE | PUMP | BLUETOOTH | USB

FEATURES

- Steel shell
- Air condensation
- Sanitization cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- External cube weight adjustment
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Internal drain pump
- Download the operation report via the app

OPTIONAL

- Programmable sanitizing cycle with ozone
- Nanotechnological evaporator treatment with Rainbow Technology
- Feet kit 100mm



RECOMMENDED DEPOSITS

11,5 kg
575 pcs

DIMENSIONS

	L x P x H (mm)
	400 x 540 x 690
	460 x 600 x 850

VOLTAGE

220-240/50/1
220/60/1

GAS

R290
GWP 3

ICE TYPE

		PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
	Full Ice Cube 20 g -38/46 35 x 37 x 32 mm	28	20 g

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling

Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	38 84	36 79	34 75	30 66
21° 70°	34 75	32 71	30 66	27 60
32° 90°	30 66	28 62	26 57	23 51
38° 100°	23 51	22 48	21 46	19 42

TECHNICAL DATA

			cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
C38	A AG	220-240/50/1N		670	370	10	29	3.2	34	40
C38	W AG	220-240/50/1N		670	290	10	20.3	43.2	34	40

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel.
+39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu

ICEMATIC

CHERRY


C38

38 kg/ 24h

Spray Ice Makers / Spray Ice Makers:
C28 - C38 - C46 - C54 - C70 - C90


C38 ALL GAS PUMP
220-240/50/1
Spray Ice Makers

DIMENSIONS

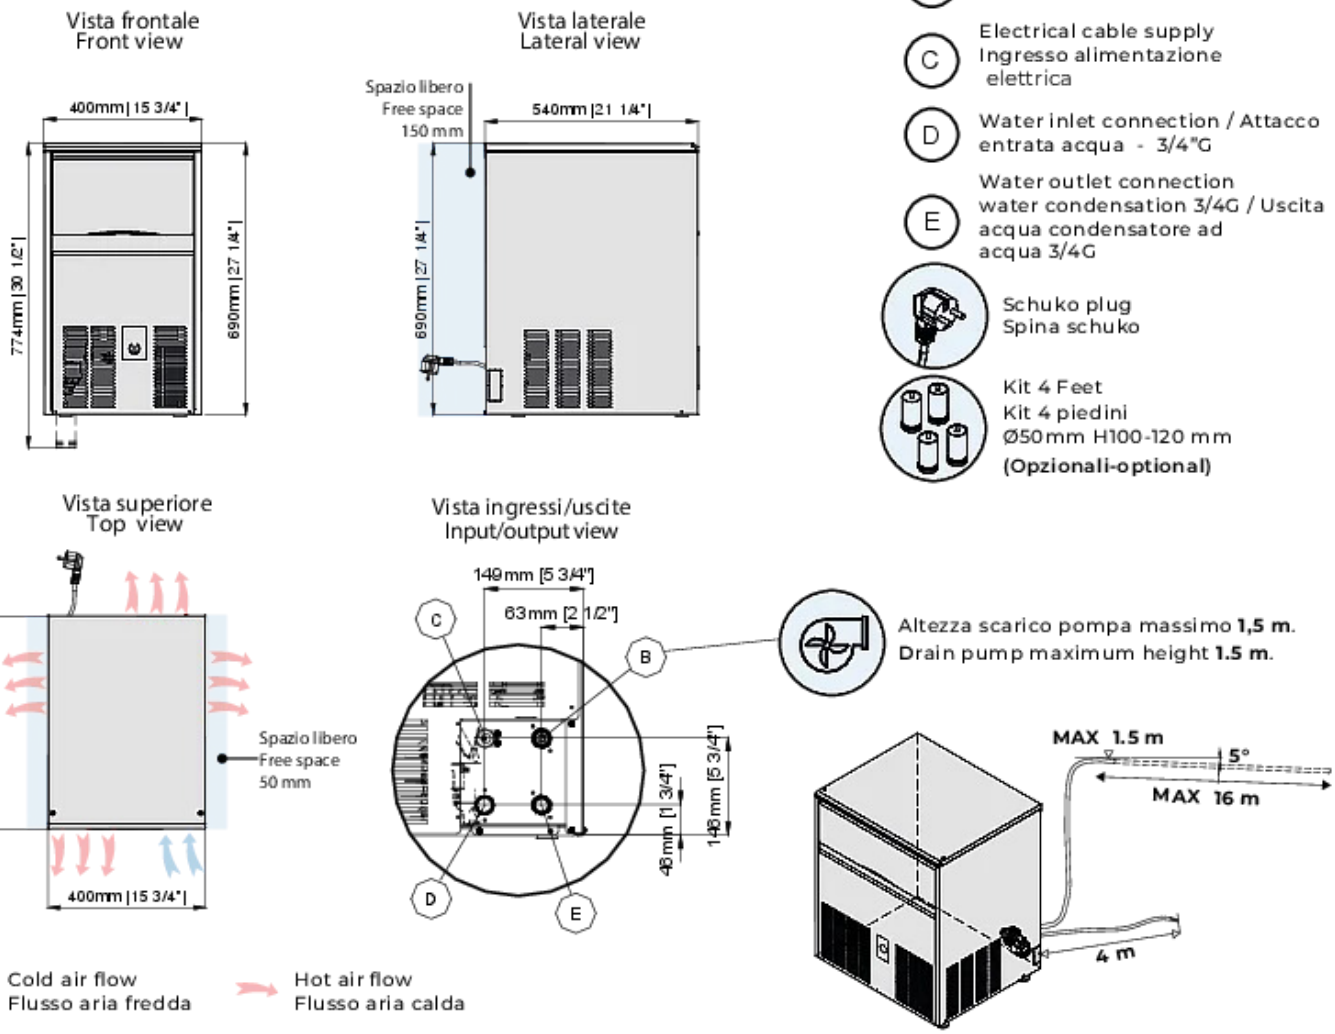


MyICE

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones

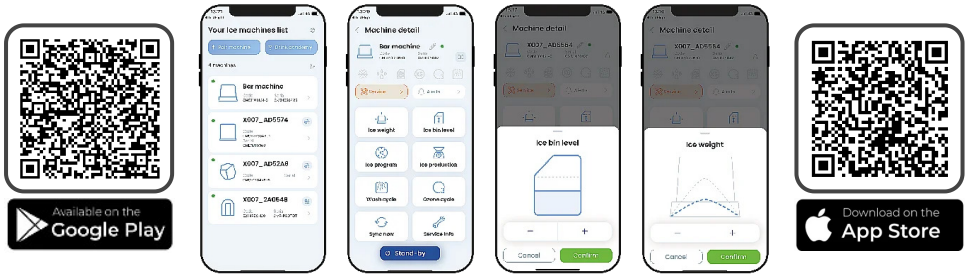

TOUCH CONTROL

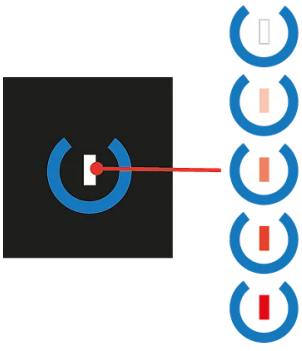

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

Heat expelled	979 W
Air Volume	185 m³/h

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel.
+39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu