

## 2 BASIN GAS DEEP FAT FRYER 8+8 LT

### 650 SERIES

A line of compact cooking appliances, designed for people who do not want to give up on high performance, even in small spaces.

Made of AISI 304 18/10 stainless steel, elegantly finished with Scotch Brite satin finish, it has rounded edges and capacious recessed areas; it is 600/650 mm deep and has a modular width of 400/600/700/800/1000 mm; the series comes complete with open base supports, with cupboards or refrigerated bases.

The appliances can be easily put together to build a unit, that is compact, without any gaps thanks to a covering profile that guarantees protection against leaks and therefore excellent hygiene. High flues, ergonomic knobs mounted on a sloped control panel for better visibility, make this range easy to use from the very first time. All models are CE-approved.



### Technical / functional characteristics

The fryers have specific high powers to ensure high quality of the fried product, as it reduces the amount of oil that is absorbed. The specific powers provided are 1 kW/l. These truly are the power levels of largesize professional machines.

The sensitivity of the thermostat with bulb positioned in the center of the tank, guarantees maximum temperature control with rapid response times to drops in temperature.

Piezoelectric ignition, pilot flame and valve with thermocouple to ensure maximum safety. The temperature can be adjusted from 60 to 190°C.

DIMENSIONS	
Width (mm)	600
Depth (mm)	650
Height (mm)	295
Gas connection (Ø)	1/2"
Electric connection (V/~ /Hz)	
Cold water connection (Ø)	
Hot water connection (Ø)	

Cold soft water connection (Ø)	
Drain (Ø)	
Gas power (Mj/hr)	50.4
Electric power (kW)	
Plate dimensions (mm)	
Tank capacity (L)	8 + 8
Tank dimensions (mm)	
Internal oven dimensions (mm)	

MODEL

6NFR/G600


CODE

CR0856099

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -  
ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm  
MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

F64G8	OF64G8	F66G8	OF66G8
6NFR/G400	EFG62108T	6NFR/G600	EFG63208T

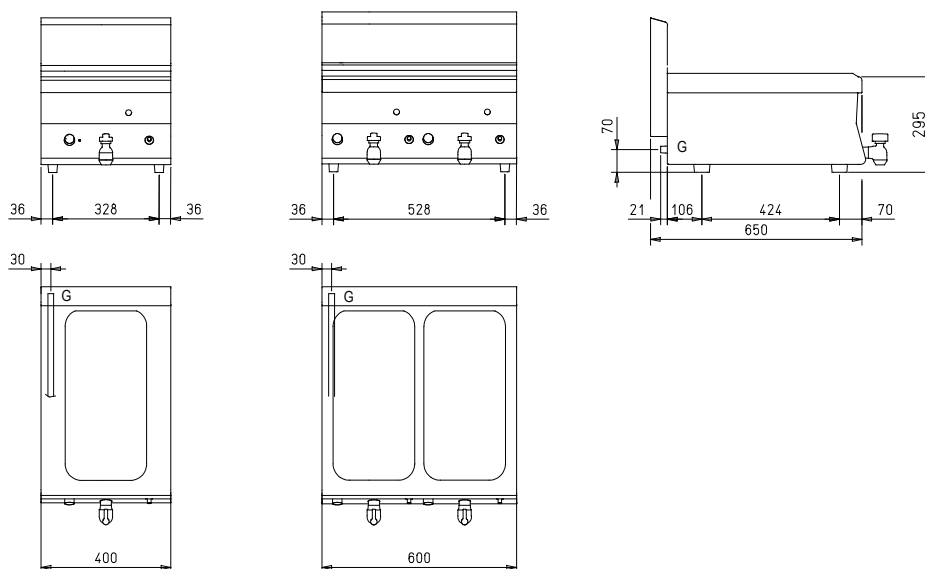

Legenda - Legende - Key - Legende - Leyenda - Legenda - Legenda

G Attacco arrivo gas - Gasanschluss - Gas connection  
Arrivée gaz - Union da gas - Gasaansluiting -  
EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)