

BLAST CHILLER / FREEZER 12 GN 2/1 (CHILLING CAPACITY +90°/+3°C KG 50 - FREEZING CAPACITY +90°/-18°C KG 32)

Model: PBF122DF-ADX



General characteristics

THE SIMPLE-SERIES CONTROLLER IS CONCEIVED SPECIFICALLY FOR CUSTOMERS WHO WANT A UNIT THAT IS SIMPLE TO OPERATE BUT STILL GIVES THEM FULL CONTROL. Easy to use it serves to blast chill or freeze the product either on a time basis or by monitoring the product's core temperature by means of the needle probe. Defrosting can be started by the user only when it is actually needed, thus meeting the need for increasingly energy efficient equipment.


Technical/functional Characteristics

- Blast chillers/freezers with electronic control, forced-air, entirely made of in AISI 304 18/10 both internally and externally.
- Control board with display. It is possible to memorize till 100 programmes (mod. SIMPLE).
- Monobody construction.
- Capacity GN 1/1.
- Core-probe at single point to measure the blast-chilling and freezing temperature.
- External satined finishing type SCOTCH-BRITE.
- 60 mm insulation with CFC and HCFC-free polyurethane with density 42 kg/m3.
- Ecological refrigerant R404A.
- Automatic defrost and evaporation of condensate water without waste of electric energy.
- High store capacity compartments, with rounded edges to make cleaning easy.
- Ergonomic handles and magnetic perimetral seals.
- Height adjustable legs (Ø 2") made of AISI 304 18/10 s/s.
- Self closing doors with still position at 100°.
- Slot-in type shelves supports and racks made of s/s, easily extractable without any tools to foster cleaning.
- Drainhole provided with cap.
- Climatical class "T" (Ambient temperature: +43°C).
- Full CE compliance.
- Build to comply with HACCP regulations.

TECHNICAL DATA

DIMENSIONS	
WIDTH (MM)	1100
DEPTH (MM)	880
HEIGHT (MM)	1800
CAPACITY	12 GN2/1
DIMENSIONE CELLA (MM)	670x750x830
TEMPERATURA DI LAVORO	-

ELECTRIC CONNECTION (V/~ /HZ)	220
COLD WATER CONNECTION (Ø)	-
DRAIN (Ø)	40 mm
POTENZA FRIGORIFERO	3930
ELECTRIC POWER (KW)	3176
CAPACITA' ABBATTIMENTO +90/+3 °C (KG)	-
CAPACITA' CONGELAMENTO +90/-18 °C (KG)	-

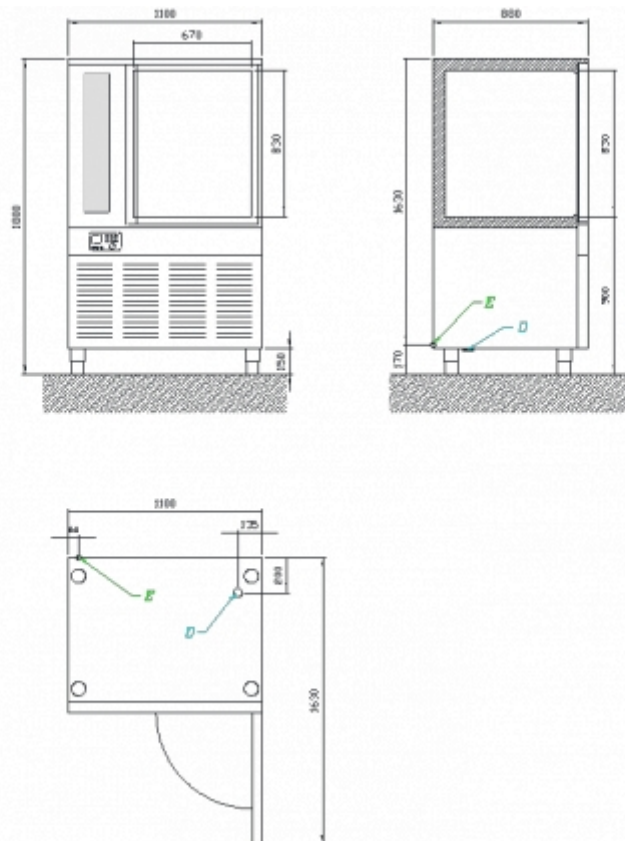

ACCESSORIES

BAKING TRAY GN1/1
KIT 4 CASTORS FOR BLAST CHILLER
SHELVE GN1/1
KIT OF GERMICIDAL LAMP
SHELVE GN2/1
KIT SUPPORT FOR LIQUID
BAKING TRAY GN2/1
KIT OF PRINTER - FOR MODELS 8/12 GN1/1