



Professional solutions for **home kitchens. Built-in domestic icemaker** with hollow shaped ice cube, with wide cooling surface recommended to cool and excite your cocktails.

Built-in self contained domestic ice maker.
Up to 20kg production per 24/hr of hollow ice cube.
6.5kg storage bin.
Complete with water & drain hoses + 1 ice scoop.
10 AMP power supply.





ICE PRODUCTION

Water Cooled Unit

Air Temp.	Water Temperature			
	32°	21°	15°	10°
°C				
°F	90°	70°	60°	50°
10°	16	18	20	23
50°	35	39	44	51
21°	15	18	19	20
70°	33	40	42	44
32°	14	17	18	19
90°	31	37	40	42
38°	13	16	17	18
100°	29	35	37	40


CUBE TYPE

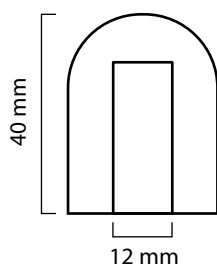

17g weight
HOLLOW CUBE
40mm x 30mm x 26mm

Hollow shaped ice cube with wide surface for fast beverage cooling.

CONTROL PANEL

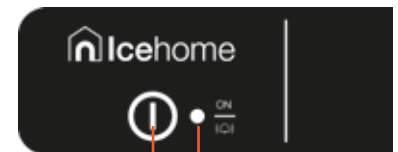

Switch ON button | State led /Alarm

BIN CAPACITY

6.5 Kg - 14.3 lbs | 380 pcs

DIMENSIONS

W x D x H (mm)

555 x 510 x 400

570 x 610 x 540

OPERATING REQUIREMENTS



220-240/50/1




R134a GWP = 1430

MIN		MAX
10° C (50° F)		40° C (104° F)
10° C (50° F)		35° C (95° F)
- 10 %		+ 10 %
1 Bar (14 psi)		5 Bar (70 psi)


SPECIFICATIONS

	cond	comp. W	ABS. W	Fuse	kWh/100kg	L / hr	kg	lbs	kg	lbs	Ton CO2 equiv.
BI236 W		449	250	10	28.9	15.5	37	82	42	93	0.27

Front View

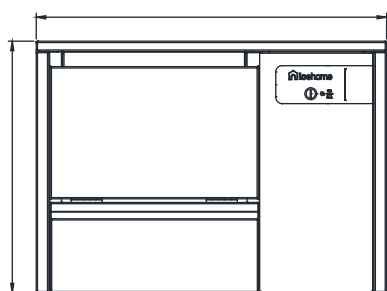


Back View

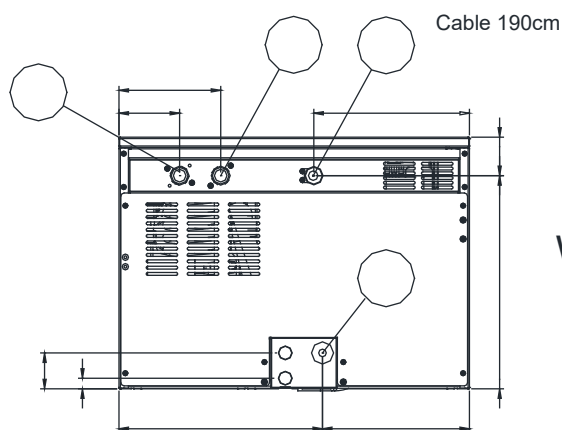


With Pump

Lateral View

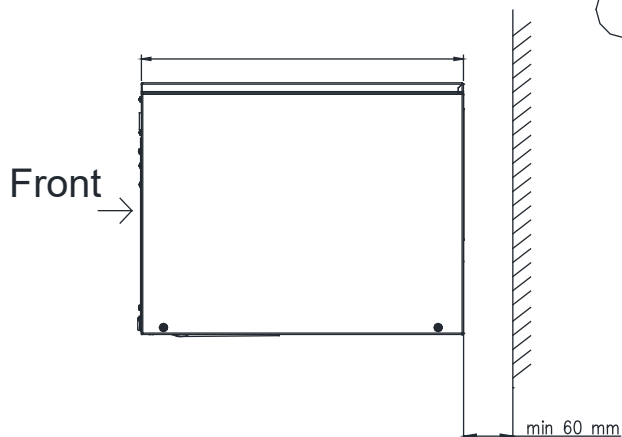

Front →

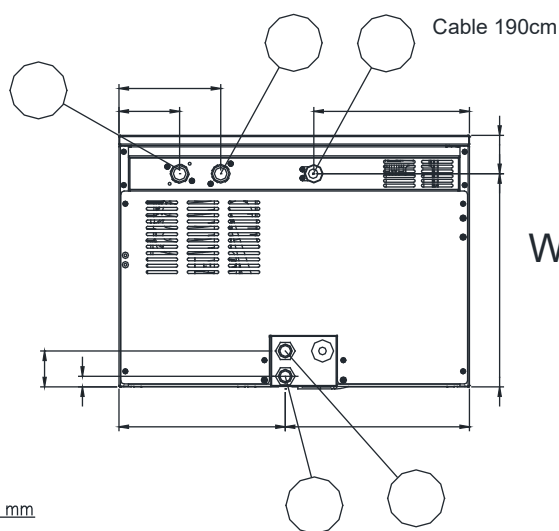

Without Pump

- A** Water inlet connection water condensation - 3/4" gas OPTIONAL
- B** Electrical cable supply
- C** Water outlet connection 20mm diam.
- D** Water outlet connection water condensation 20mm diam.
- E** Water inlet connection 3/4" gas
- F** Water outlet connection water pump 20mm diam.