


REFRIGERATED CABINET HANDY - 1 DOOR - TEMP -22°/-18°C

Model: H 70 BT

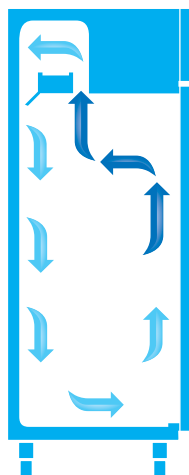

General characteristics

- Made of thick stainless steel with perfectly rounded corners, these machines have a one-piece moulded bottom and ceiling for easier cleaning of the refrigerated compartment and maximum hygiene.
- The self-closing doors and insulation of the cabinets, with thickness of up to 75 mm, reduce temperature loss and ensure higher performance and efficiency, allowing for the use of compressors of smaller size and consequently lower consumption. This, and the use of foam insulation made of CFC-free polyurethane represents a benefit for the environment.
- Maintenance is extremely easy, as the access to all components is frontal by tilting the top panel.
- The refrigeration unit with evaporator, is placed outside the refrigerated compartment, enables the maximum use of the loading capacity. It follows that Polaris cabinets have a very high load index (footprint) up to 833l/m².

Technical/functional characteristics

- Cabinets entirely constructed in S/S.
- 75 mm insulation with CFC and HCFC-free polyurethane.
- Refrigerants TN R134A - BT R452a
- The front panel can be tilted to make routine maintenance operations easier (cleaning the condenser).
- Cabinet interior with rounded corners for easier cleaning.
- 3 coppie guide plastificate con 3 griglie plastificate di serie.
- Standard equipped with 3 plastic shelves and 3 pair of plastic grid supports.
- 15-cm height-adjustable feet.
- Easily replaceable door gasket.
- Automatic simple stop defrost economising energy.
- Hot gas condensate evaporation
- Doors with self-closing hinges.
- Easily reversible doors.
- Lock fitted as standard.
- Suitable to be placed on a plinth.
- Monoblock condensing unit with evaporator outside the refrigerated compartment and forced ventilation.
- Ventilated refrigeration system (the evaporator is painted and equipped with a protection casing).
- Digital control with display of alarms and errors.

TECHNICAL DATA

DIMENSIONS	
WIDTH (MM)	700
DEPTH (MM)	830
HEIGHT (MM)	2080
CABINET DIMENSIONS	550x710x1480

CAPACITY (lt)	495
ELECTRIC CONNECTION (V~/HZ)	230/1/50
TEMPERATURE (°C)	-22/-18
REFRIGERATION CAPACITY (W)	664
POWER INPUT (W)	540