

145 kg/ 24h
Modular Ice Maker / Modular Ice Maker:
M145 - M195 - M205 - M305 - M405

M145 ALLGAS
220-240V/1/50Hz
Modular Ice Maker



FEATURES

- Steel shell
- Air and water condensation
- Washing cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- External cube weight adjustment
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Removable and cleanable air filters



ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
Half-Large-145 10 x 24 x 29 mm	265	6 g
Full Dice-145 22 x 24 x 22 mm	168	10 g
Full Large-145 29 x 24 x 29 mm	110	17 g

OPTIONAL

- Ozone sanitization
- Nanotechnological evaporator treatment with Rainbow Technology

RECOMMENDED DEPOSITS

MG105-MG155-MG205-MG255(KM205-255)

DIMENSIONS

	L x P x H (mm)
	560 x 620 x 575
	630 x 690 x 740

VOLTAGE

	220-240V/1/50Hz 220V/1/60Hz
--	--------------------------------

GAS

	R290 GWP 3
--	---------------

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	145 320	143 315	139 306	122 269
21° 70°	134 295	130 287	124 273	110 242
32° 90°	111 245	108 238	106 234	95 209
38° 100°	99 218	96 212	89 196	81 179

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	145 320	143 315	139 306	122 269
21° 70°	134 295	130 287	124 273	110 242
32° 90°	128 282	126 278	120 264	112 247
38° 100°	124 273	122 269	116 256	108 238

TECHNICAL DATA


		cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
M145 A AG 220-240V/50/1			1131	650	10	13	7.7	53	65
M145 W AG 220-240V/50/1			1131	590	10	10.1	54.3	53	66

 145 kg/ 24h

Modular Ice Maker / Modular Ice Maker:
M145 - M195 - M205 - M305 - M405


M145 ALLGAS
220-240V/1/50Hz
Modular Ice Maker

DIMENSIONS

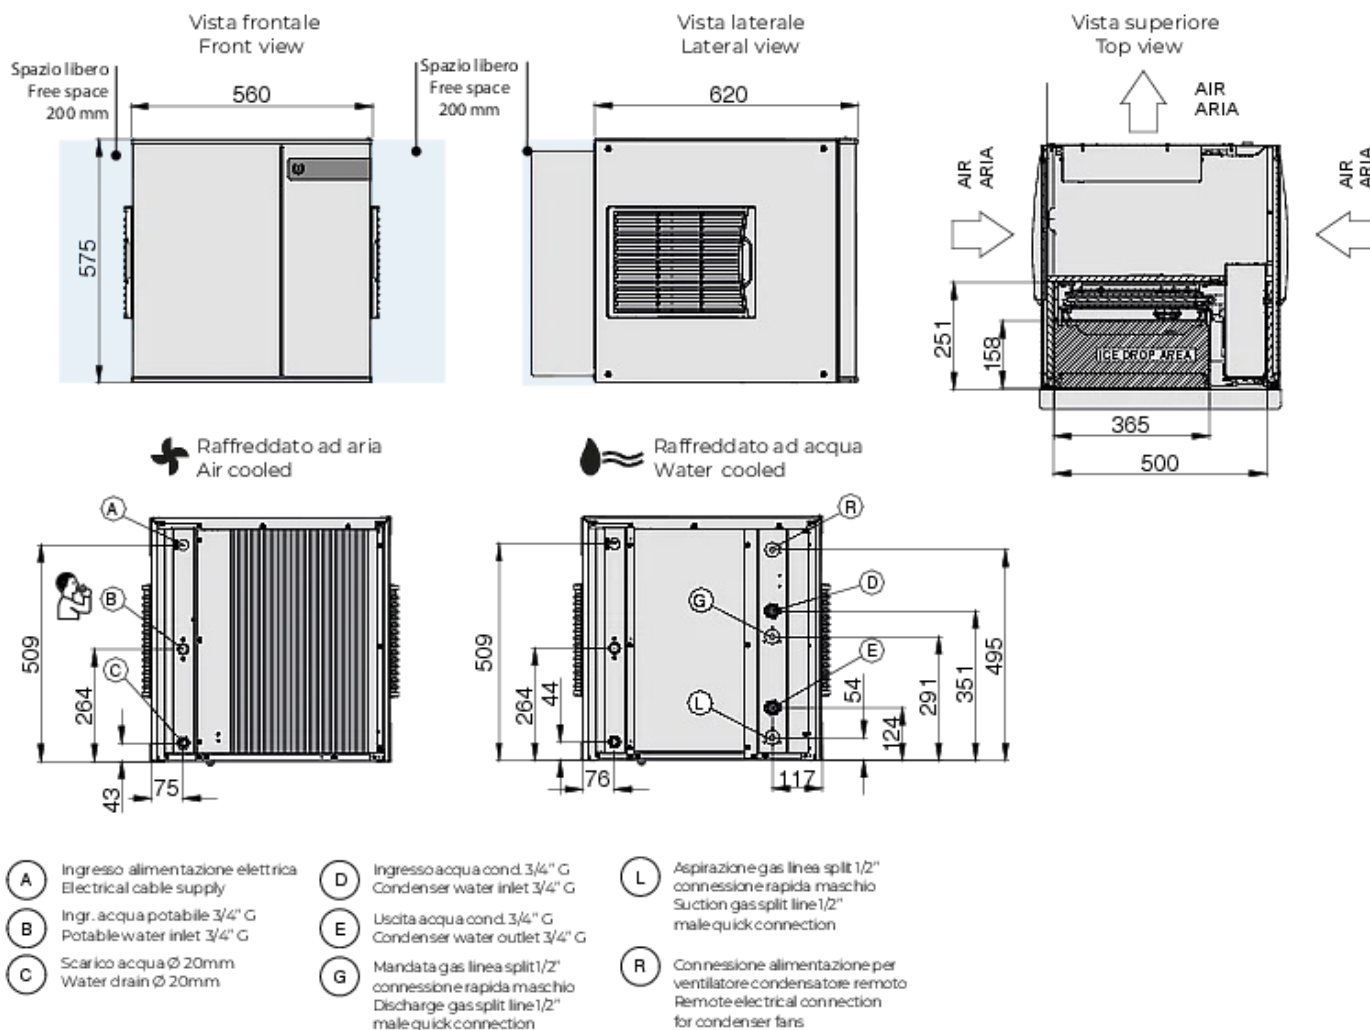

MyICE


Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones

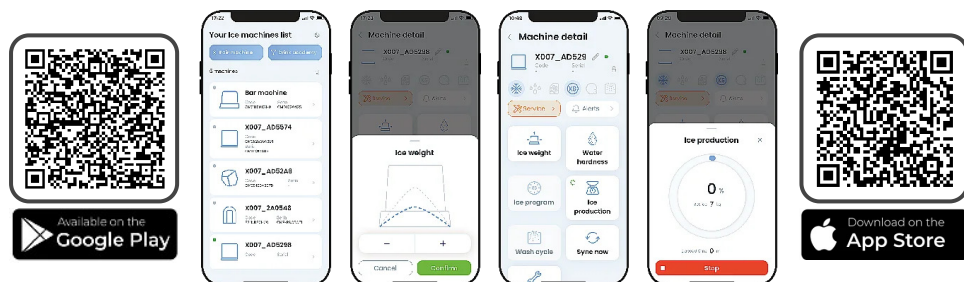

Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

TOUCH CONTROL



Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	1781 W
Air Volume	590 m³/h